

Four First-Class BANDSAWS for Resawing

AMERICAN WOODWORKER[®]

#88 August 2001

www.americanwoodworker.com

Picture Frames

13 Tips for

Perfect Miters
Perfect Glue-Ups
Perfect Mats

Goof-Proof Tenons
With Our Shop-Made Jig

\$4.99 U.S.



A READERS DIGEST PUBLICATION

PLUS

- Tips for Buying Oak Plywood
- Wooden Storm/Screen Door
- Craftsman-Style Mantelpiece



**AWESOME
SUMMER SALE
PRICING!**

**EFFECTIVE JUNE 1ST
- SEPTEMBER 15TH**

Grizzly[®]

Industrial

MODEL G1022Z

10" HEAVY-DUTY TABLE SAW WITH CAST IRON WINGS

- TABLE SIZE W/ EXTENSION WINGS: 27 1/4" x 40 1/4"
- RAIL DIMENSIONS: 44" x 1 3/4"
- CUTTING CAPACITY AT 90°: 3 1/2"
- 1 1/2 H.P., SINGLE-PHASE, 110/220V MOTOR (PRE-WIRED TO 110V)
- REDESIGNED HEAVY-DUTY RIP FENCE WITH MICRO-ADJUSTMENT KNOB
- APPROX. SHIPPING WEIGHT: 250 LBS.
- MAX. RIPPING CAPACITY: 48"
- CUTTING CAPACITY AT 45°: 2 1/2"



**INCLUDES
FREE 10"
CARBIDE-TIPPED
SAW BLADE!**

Reg. ~~\$449⁰⁰~~
SALE PRICE
\$415⁰⁰

\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1023S

10" TILTING ARBOR SUPER HEAVY-DUTY TABLE SAW

- TABLE SIZE W/ EXTENSION WINGS: 36 1/4" x 27 1/2"
 - CUTTING CAPACITY: 8" LEFT AND 25" RIGHT OF BLADE
 - 3 H.P., SINGLE-PHASE, 220V MOTOR
 - ALL SEALED BALL BEARINGS
 - APPROX. SHIPPING WEIGHT: 360 LBS.
- "You won't find a more solid performer than the Grizzly G1023S for under \$1000 - You will never get bogged down cutting with this 3 H.P. animal."*
Wood Magazine November, 2000



**INCLUDES
SHOP FOX[®]
CLASSIC FENCE!**

Reg. ~~\$895⁰⁰~~
SALE PRICE
\$755⁰⁰

\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1021Z

15" PLANER WITH CABINET STAND

- 3 H.P., 220V, SINGLE-PHASE MOTOR
- RATE OF FEED 16 F.P.M. & 20 F.P.M.
- CUTTERHEAD SPEED: 5000 R.P.M.
- MAXIMUM CUTTING WIDTH: 14 1/2"
- MAXIMUM CUTTING HEIGHT: 6 1/4"
- MAXIMUM CUTTING DEPTH: 1/4"
- NUMBER OF KNIVES: 3
- APPROX. SHIPPING WEIGHT: 540 LBS.



**INCLUDES
JACK SCREW AND SPRING
LOADED KNIFE SETTING!**

Reg. ~~\$995⁰⁰~~
SALE PRICE
\$895⁰⁰

\$115 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1182HW

6" X 47" JOINTER WITH HANDWHEELS

- 1 H.P., SINGLE-PHASE, 110/220V MOTOR (PRE-WIRED TO 110 V)
- HEAVY-DUTY ONE PIECE STEEL STAND W/BUILT IN CHIP CHUTE
- SUPER HEAVY-DUTY, CENTER-MOUNTED FENCE - POSITIVE STOPS @ 45° & 90°
- 3 KNIFE BALL BEARING CUTTERHEAD
- TABLE SIZE: 6" x 47"
- 1/2" RABBETING CAPACITY
- APPROX. SHIP. WEIGHT: 215 LBS.



**FREE
PAIR OF SAFETY
PUSH BLOCKS**

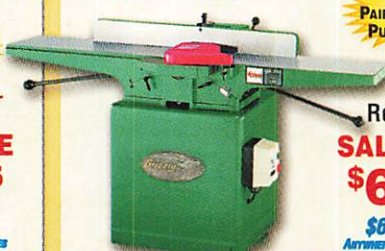
Reg. ~~\$325⁰⁰~~
SALE PRICE
\$299⁹⁵

\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1018

8" X 65" SUPER HEAVY-DUTY JOINTER

- 1 1/2 H.P., 220V, SINGLE-PHASE MOTOR • 3-KNIFE CUTTERHEAD
- 3-HSS KNIVES ARE 8" x 1/4" x 1" • MAX. CUTTING DEPTH: 1/2"
- MAGNETIC SAFETY SWITCH PROTECTS THE MOTOR AND THE OPERATOR
- BOTH INFED AND OUTFEED TABLES ARE FULLY ADJUSTABLE
- INFED TABLE HAS RABBETING LEDGE
- APPROX. SHIP. WEIGHT: 450 LBS.



**FREE
PAIR OF SAFETY
PUSH BLOCKS**

Reg. ~~\$695⁰⁰~~
SALE PRICE
\$649⁹⁵

\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1035

1 1/2 H.P. SHAPER

- 2 INTERCHANGEABLE SPINDLES: 1/2" AND 3/4" • 3" SPINDLE TRAVEL
- HEAVY-DUTY 1 1/2 H.P., 110/220V MOTOR
- TWO SPINDLE SPEEDS: 7,000 AND 10,000 R.P.M.
- SPINDLE OPENINGS: 1 1/4", 3/4", 3/8", AND 5"
- PRECISION-GROUND CAST IRON TABLE
- TABLE SIZE: 20 1/4" x 18"
- FLOOR-TO-TABLE HEIGHT: 33 1/2"
- ALL BALL BEARING CONSTRUCTION
- MAX. CUTTER DIAMETER: 5"
- APPROX. SHIPPING WEIGHT: 220 LBS.



SHOWN WITH OPTIONAL WING


Reg. ~~\$449⁰⁰~~
SALE PRICE
\$375⁰⁰

\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G7297

12" DISC SANDER

- 1 H.P., 110V, 10 AMP, TEFC MOTOR • MOTOR SPEED: 1725 R.P.M.
- LARGE 17 1/4" x 8 1/4" ALUMINUM TABLE TILTS FROM 0° TO 45°
- SAFETY TOGGLE ON/OFF SWITCH
- NON-SLIP RUBBER FEET
- COMPACT AND PORTABLE
- INCLUDES MITER GAUGE
- ACCEPTS 12" PSA DISCS
- APPROX. SHIPPING WEIGHT: 60 LBS.



Reg. ~~\$149⁹⁵~~
SALE PRICE
\$129⁹⁵

MODELS G1183 & G1276 HEAVY-DUTY COMBO SANDERS 6" x 48" BELT - 12" DISC

- MITER GAUGE INCLUDED!
- MOTOR: SINGLE-PHASE, 1 H.P., IN 3,450 OR 1,725 R.P.M.
- TABLE SIZE FOR BELT: 7 3/8" x 14 1/2"
- TABLE SIZE FOR DISC: 7" x 16 1/2"
- 3" DUST PORT
- BASE MEASURES: 16 1/2" x 14"
- G1183: 5,000 F.P.M. BELT SPEED, 3450 R.P.M.
- G1276: 2,500 F.P.M. BELT SPEED, 1725 R.P.M.
- APPROX. SHIPPING WEIGHT: 155 LBS.



G1183 Reg. ~~\$399⁰⁰~~
SALE PRICE
\$379⁹⁵

G1276 Reg. ~~\$439⁰⁰~~
SALE PRICE
\$419⁹⁵

\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES

MODEL G1140

6" x 80" FLOOR MODEL EDGE SANDER

- 1 1/2 H.P. TEFC, 110V/220V MOTOR • 1725 R.P.M. DIRECT DRIVE
- 22" x 10 1/2" CAST IRON TABLE • 35" TABLE HEIGHT
- 60° - 0° - 60° TABLE TILT • BELT SPEED: 1,800 F.P.M.
- BELT SIZE: 6" x 80" • 90° SANDING BELT TILT
- 16/8 AMPS
- PLATEN: 6 3/4" x 29 1/2"
- END TABLE: 4 1/4" x 8"
- 4" DUST PORT
- APPROX. SHIPPING WEIGHT: 250 LBS.



Reg. ~~\$475⁰⁰~~
SALE PRICE
\$425⁰⁰

\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

MEDIA CODE

AD1137

356301658

**CALL FOR A FREE
436 PAGE COLOR
CATALOG TODAY!**

1-800-523-4777

**CUSTOMER SERVICE:
(570)546-9663
FAX: (800)438-5901**

3 SHOWROOM LOCATIONS: BELLINGHAM, WA • SPRINGFIELD, MO • WILLIAMSPORT, PA

**TRUSTED, PROVEN
& A GREAT VALUE
SINCE 1983!**

- FAST SHIPPING – MOST ORDERS ARE SHIPPED WITHIN 1 DAY
- FRIENDLY SERVICE • TRAINED ENGINEERS ON STAFF AT EACH LOCATION
- 2 QUALITY CONTROL OFFICES OVERSEAS WITH QUALIFIED ENGINEERS
- OVER ONE MILLION PARTS IN STOCK AT ALL TIMES!
- NO DEALERS, NO MIDDLEMEN - **BUY DIRECT & SAVE**

**SHOWN BELOW IS JUST A SAMPLING OF OUR INCREDIBLE SUMMER SALE.
VISIT OUR WEBSITE FOR MORE SALE ITEMS AND DETAILED INFORMATION!**

**MODEL G1033
20" PLANER**

- 3 H.P., 220V, SINGLE-PHASE MOTOR
- CUTTERHEAD SPEED: 4833 R.P.M.
- RATE OF FEED: 16 F.P.M. & 20 F.P.M.
- MAX. CUTTING WIDTH: 20"
- MAX. CUTTING HEIGHT: 8 3/4"
- MAX. CUTTING DEPTH: 1/4"
- NUMBER OF KNIVES: 4 H.S.S.
- ALL BALL BEARING CONSTRUCTION
- APPROX. SHIPPING WEIGHT: 785 LBS.



**4 BLADE
CUTTERHEAD!**
Reg. ~~\$1,295.00~~
SALE PRICE
\$1,195.00
\$115 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1019Z
14" BANDSAW**

- 1 H.P., 110/220V, SINGLE PHASE MOTOR
- 2 BLADE SPEEDS: 2500 & 3350 F.P.M.
- MAXIMUM CUTTING WIDTH: 14 1/4"
- MAXIMUM CUTTING HEIGHT: 6 1/2"
- TABLE TILTS: 15° LEFT AND 45° RIGHT
 - BLADE LENGTH: 98"
 - BLADE WIDTH: 1/4" TO 3/4"
- CAST IRON AND STEEL CONSTRUCTION
- INCLUDES 1/2" BLADE, FENCE AND MITER GAUGE
- OVERALL SIZE: 66"H x 26"W x 22"D
- APPROX. SHIPPING WEIGHT: 165 LBS.



Reg. ~~\$335.00~~
SALE PRICE
\$289.95
\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1073
16" BANDSAW**


- 2 H.P., 110/220V, (PREWIRED FOR 220V) TEFC MOTOR WITH CAPACITOR START
- 3 BLADE SPEEDS: 2275, 2720, 3265 F.P.M.
- MAXIMUM CUTTING WIDTH: 16 1/2"
- MAXIMUM CUTTING HEIGHT: 7 1/4"
- TABLE TILTS: 10° LEFT AND 45° RIGHT
 - TABLE SIZE: 17" x 17"
 - BLADE LENGTH: 113"
 - BLADE WIDTH: 1/4" TO 1"
 - OVERALL HEIGHT: 72"
- INCLUDES 1/2" BLADE, FENCE AND MITER GAUGE
- APPROX. SHIPPING WEIGHT: 456 LBS.



Reg. ~~\$625.00~~
SALE PRICE
\$549.95
\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1026
3 H.P. SHAPER**

- 3 INTERCHANGEABLE SPINDLES: 1/2", 3/4" AND 1" • 3" SPINDLE TRAVEL
- HEAVY-DUTY 3 H.P., SINGLE-PHASE, 220V MOTOR WITH REVERSING SWITCH
- TWO SPINDLE SPEEDS: 7,000 AND 10,000 R.P.M.
- SPINDLE OPENINGS: 1 1/4", 2 1/4", 4", AND 5 1/2"
- PRECISION-GROUND CAST IRON TABLE
- TABLE SIZE WITH STANDARD WINGS ATTACHED: 30 1/2" x 28 1/4"
- FLOOR-TO-TABLE HEIGHT: 34"
- APPROX. SHIPPING WEIGHT: 353 LBS.



Reg. ~~\$850.00~~
SALE PRICE
\$775.00
\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1029
2 H.P. DUST COLLECTOR**

- MOTOR AMP DRAW: 12 AMPS (220V ONLY)
- 2 H.P., 220V, SINGLE-PHASE MOTOR
- R.P.M.: 3450
- STANDARD BAG FILTRATION: 30 MICRON
- PORTABLE BASE SIZE: 21 1/4" x 33 1/2"
- AIR SUCTION CAPACITY: 1550 C.F.M.
- STATIC PRESSURE: 12.3"
- APPROX. SHIPPING WEIGHT: 130 LBS.



FREE CYCLONE SEPARATOR & BOOK!

Reg. ~~\$279.00~~
SALE PRICE
\$239.95
\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES



**MODEL G1030
3 H.P. DUST COLLECTOR**

- 3 H.P., 220V, SINGLE-PHASE, 3450 R.P.M. MOTOR
- MOTOR AMP DRAW: 15 AMPS (220V ONLY)
- AIR SUCTION CAPACITY: 2300 C.F.M.
- STATIC PRESSURE: 16.7"
- STANDARD BAG FILTRATION: 30 MICRON
- APPROX. SHIPPING WEIGHT: 170 LBS.



INCLUDES FREE 4 x 10 HOSE & BOOK!
Reg. ~~\$455.00~~
SALE PRICE
\$429.95
\$48 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G9922
OSCILLATING SPINDLE SANDER**

- 1/2 H.P. SINGLE PHASE 4.6 AMP TEFC MOTOR
- GROUND CAST IRON 14 1/2" x 14 1/2" TABLE TILTS TO 45°
- STROKE LENGTH: 1" • BUILT-IN 2" DUST COLLECTION PORT
- FLOOR-TO-TABLE HEIGHT: 39 1/2"
- 3450 R.P.M. SPINDLE SPEED
- SPINDLE OSCILLATES AT 64 STROKES-PER-MINUTE
- SHIELDED & PERMANENTLY LUBRICATED BALL BEARINGS
- INCLUDES 80 GRIT SLEEVE FOR SPINDLE, MITER GAUGE AND WRENCH SET
- APPROX. SHIPPING WEIGHT: 95 LBS.



Reg. ~~\$175.00~~
SALE PRICE
\$169.95
\$20 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1071
OSCILLATING SPINDLE SANDER**

- 1 H.P. SINGLE PHASE 110/220V TEFC MOTOR
- EXCLUSIVE, CAST IRON 25" x 25" TABLE TILTS TO 45°R & 20°L
- STROKE LENGTH: 1 1/2"
- FLOOR-TO-TABLE HEIGHT: 35 1/2"
- BUILT-IN 4" DUST COLLECTION PORT
- 1725 R.P.M. SPINDLE SPEED
- SPINDLE OSCILLATES AT 72 S.P.M.
- 10 TAPERED AND THREADED SPINDLE SIZES
- INCLUDES 100 GRIT SLEEVE FOR EACH SPINDLE, MITER GAUGE AND WRENCH SET
- APPROX. SHIPPING WEIGHT: 300 LBS.



Reg. ~~\$525.00~~
SALE PRICE
\$495.00
\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

**MODEL G1066
24" DRUM SANDER**

- 5 H.P. 220V DRUM MOTOR DRIVES 2 ALUMINUM SANDING DRUMS
- 1/4 H.P. CONVEYOR MOTOR GIVES AN 11 FPM RATE OF FEED
- 2 BUILT-IN 4" DUST PORTS FOR EASY HOOK-UP TO COLLECTION SYSTEM
- ALL STEEL CONSTRUCTION
- STATE-OF-THE-ART COMPUTER BALANCED DRUMS
- HANDLES STOCK UP TO 23 1/2" WIDE x 4 1/4" THICK
- APPROX. SHIPPING WEIGHT: 430 LBS.



Reg. ~~\$1,095.00~~
SALE PRICE
\$995.00
\$68 SHIPPING
ANYWHERE IN LOWER 48 STATES

**OVER 10,000 TOOLS AVAILABLE ON-LINE!
RECEIVE A FREE GIFT WITH EVERY ONLINE ORDER
(LIMITED TIME OFFER)**

grizzly.com





SHOP FOX® INNOVATIVE PRODUCTS

NEW, FROM THE MAKER OF THE FAMOUS SHOP FOX MOBILE BASES AND TABLE SAW FENCES IS THIS PARTIAL LINE-UP OF FINE WOODWORKING MACHINES. WHETHER IT IS THE PATENTED OSCILLATING DRUM SANDING FEATURE ON THE DRILL PRESS OR THE PATENT PENDING MORTISING MACHINE, SHOP FOX MACHINES ARE DESIGNED FOR PRACTICAL USE. SEE THESE FINE MACHINES AT A DEALER NEAR YOU!

OSCILLATING DRILL PRESS

- ◆ MOTOR: ¾ H.P. 110V, 1725 R.P.M.
- ◆ OVERALL HEIGHT: 38"
- ◆ SPINDLE TRAVEL: 3¼"
- ◆ SWING: 13¼"
- ◆ DRILL CHUCK: ⅝"
- ◆ TABLE: ROUND 12⅝" DIA.
- ◆ TABLE SWING: 360°
- ◆ 12 SPEEDS: 250-3050 R.P.M.
- ◆ WARRANTY: 2 YEARS
- ◆ WEIGHT: 115 LBS.

**PATENT OWNED BY
WOODSTOCK
INTERNATIONAL INC.**

W1668

SHOP FOX®

Oscillating Drill Press

Includes

Drum Sander Set

The patented design moves the spindle up and down while rotating.

2 H.P. DUST COLLECTOR

- ◆ MOTOR SIZE: 2 H.P., 110/220V, SINGLE-PHASE, 3450 R.P.M.
- ◆ MOTOR AMP DRAW: 12 AMPS (220V)
- ◆ 5" INLET WITH A REMOVABLE "Y" FITTING WITH TWO 4" OPENINGS
- ◆ PORTABLE BASE SIZE: 21½" x 33½"
- ◆ BAG VOLUME: 5.4 CUBIC FEET
- ◆ HEIGHT (WITH BAGS INFLATED): 78"
- ◆ BAG SIZE (DIA. X DEPTH): 19" x 33" (2)
- ◆ AIR SUCTION CAPACITY: 1550 C.F.M.
- ◆ STATIC PRESSURE: 12.3"
- ◆ STANDARD BAG FILTRATION: 30 MICRON
- ◆ WARRANTY: 2 YEARS
- ◆ WEIGHT: 130 LBS.

W1666

SHOP FOX®

2 H.P. Dust Collector

16" BANDSAW

- ◆ MOTOR SIZE: 1½ H.P. 110/220V
- ◆ MAX. CUTTING WIDTH: 15¼"
- ◆ MAX. CUTTING HEIGHT: 8½"
- ◆ TABLE SIZE: 16" x 16"
- ◆ TABLE HEIGHT: 43"
- ◆ BLADE SIZE RANGE: ¼" - 1¼"
- ◆ BLADE LENGTH: 115"
- ◆ BLADE SPEEDS: 2300/3300 F.P.M.
- ◆ WARRANTY: 2 YEARS
- ◆ WEIGHT: 335 LBS.

Features the patent pending

Quick Blade Tension Lever

W1673

SHOP FOX®

16" Bandsaw

MORTISING MACHINE

- ◆ MOTOR: ½ H.P., 3450 R.P.M.
- ◆ ADJUSTABLE DEPTH STOP ROD
- ◆ UNIQUE SWIVELING BASE
- ◆ HYDRAULIC CYLINDER FOR SOFTER RELEASES
- ◆ 6" x 16" WOOD TABLE
- ◆ MORTISE TO THE CENTER OF A 8" WIDE BOARD
- ◆ MORTISE LUMBER TO 8¾" THICK
- ◆ HEAVY CAST IRON CONSTRUCTION
- ◆ WARRANTY: 2 YEARS
- ◆ WEIGHT: 90 LBS.

PATENT PENDING

W1671

SHOP FOX®

Mortising Machine

The unique

Swiveling Base
allows easy off the bench operations and opens new possibilities for custom mortises.

**ALL
NEW!**



WOODSTOCK
SHOP FOX
INTERNATIONAL

WHOLESALE ONLY
Call or Email us for the
location of a dealer near you!
1-800-840-8420

sales@woodstockint.com • www.woodstockinternational.com

SHOP FOX® IS A
REGISTERED TRADEMARK
OF WOODSTOCK
INTERNATIONAL, INC.



Contents


#88 August 2001

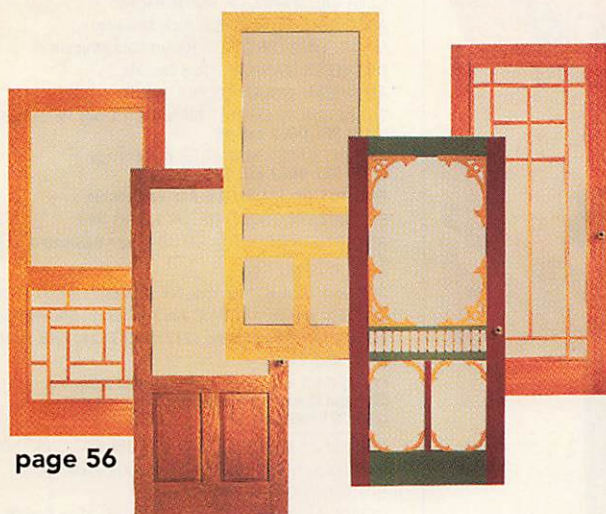SHOP TIP SPECIAL


Tips for Better Picture Frames

Save lots of money and get perfect frames with the help of these 13 tips.


48



page 56

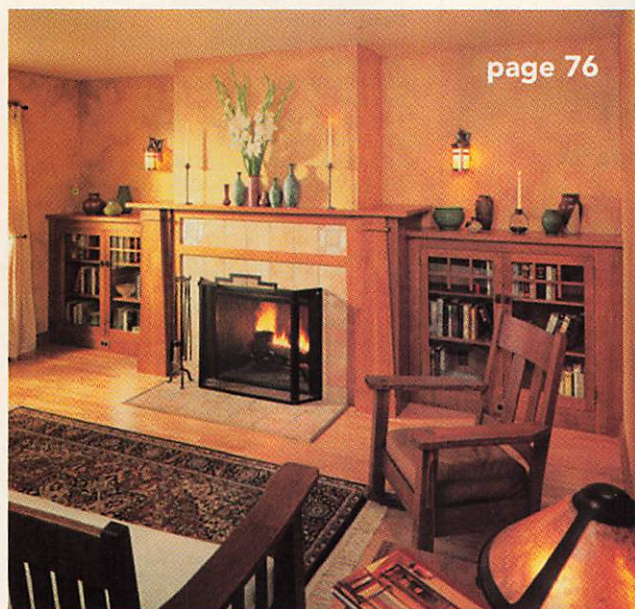

page 76

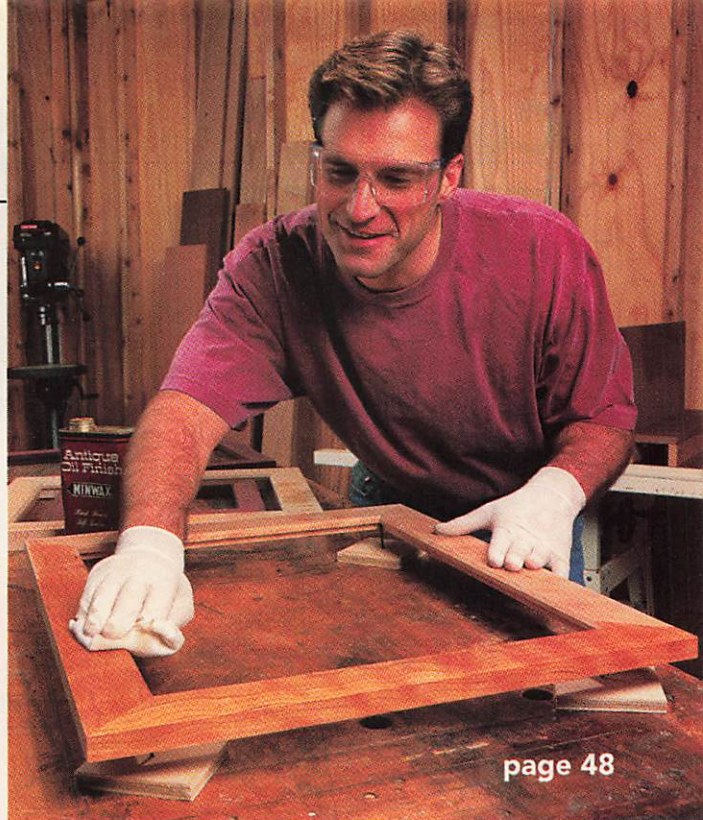

page 48

Wooden Storm Door

56

Make a great first impression with this combination storm/screen door.

Foolproof Tenons

66

You'll groove on our, simple, safe and time-saving technique. We promise!

Craftsman Bookcase and Mantel

76

Add style and character to your home with this classic combination.

TOOL TEST

Bandsaws for Resawing

84

Resawing can stretch a bandsaw to its limits. We put 17 bandsaws to the test to see which ones can really cut it.

AMERICAN
WOODWORKER

American Woodworker AUGUST 2001

3

Contents

DEPARTMENTS

8 Question & Answer

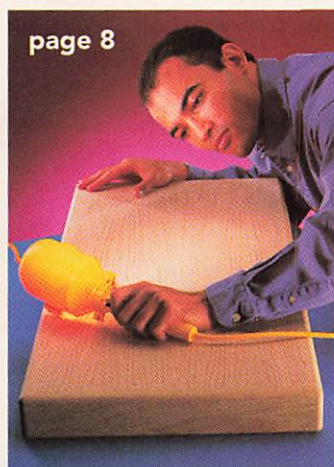
16 Workshop Tips

28 Product Reviews

36 The Way Wood Works Red Oak Plywood

92 Small Shop Tips

104 Great Wood! Figured Cherry



How to reach us

We welcome your comments, suggestions, or complaints. Write to us at:
American Woodworker, 2915 Commers Dr., Suite 700, Eagan, MN 55121
Phone: (651) 454-9200 Fax: (651) 994-2250
e-mail: amwood@concentric.net

Back issues

Some are available for \$5 each. Copies of past articles; photocopies are available for \$3 each. For either, write or call:
American Woodworker Reprint Center, P.O. Box 83695, Stillwater, MN 55083-0695, (715) 246-4344, 8 AM to 5 PM CST, Mon. through Fri.
Visa, MasterCard and Discover accepted.

Subscription inquiries

American Woodworker, Subscriber Service Dept., P.O. Box 2134, Harlan, IA 51593-0323; (800) 666-3111; e-mail: AWWcustserv@cdsfulfillment.com

AMERICAN WOODWORKER

EDITOR Ken Collier

SENIOR EDITOR Tom Caspar

ASSOCIATE EDITORS Randy Johnson, Tim Johnson, Dave Munkittrick

CONTRIBUTING EDITOR George Vondriska

ART DIRECTORS Patrick Hunter, Vern Streets, Barbara Pederson

COPY EDITOR Mary Flanagan

FACT CHECKING SPECIALIST Nina Childs Johnson

PRODUCTION TEAM Judy Rodriguez

SHOP ASSISTANTS Ben Davis, Jeff Larson, Al McGregor

READER SERVICE SPECIALIST Roxie Filipkowski

ADMINISTRATIVE ASSISTANTS Lori Callister, Shelly Jacobsen

GENERAL MANAGER Bonnie Bachar

ASSOCIATE PUBLISHER Rick Straface

MARKETING DIRECTOR Robert Calandrucchio

BUSINESS MANAGER Tom Cassata

AMERICAN WOODWORKER SHOW

TRADE SHOW/EXHIBIT MANAGER Cindy Helmlinger
(215) 321-9662 ext. 46

EXHIBIT SALES MANAGER Bob LePage
(215) 321-9662 ext. 42

PROMOTION MANAGER Andrea Vecchio

PROMOTION COORDINATOR Joanne Noé

ADVERTISING COORDINATOR Susan Bordonaro

ADVERTISING SALES

260 Madison Ave., New York, NY 10016; 212-850-7226

CHICAGO and WEST COAST Jim Ford (312) 540-4804

NEW YORK David Clutter (212) 850-7124, Tuck Sifers
(212) 850-7197

CLASSIFIED ADVERTISING The McNeill Group, Inc.
Classified Manager, Kristofer Ohrenick,
(215) 321-9662, ext. 12

PUBLISHED BY HOME SERVICE PUBLICATIONS, INC.,
a subsidiary of the Reader's Digest Association, Inc.

EDITOR-IN-CHIEF Gary Havens

OFFICE ADMINISTRATIVE MANAGER Alice Garrett

TECHNICAL MANAGER Shannon Hooge

CHAIRMAN, CHIEF EXECUTIVE OFFICER

Thomas O. Ryder

WORLDWIDE CIRCULATION DIRECTOR

John Klingel

VICE PRESIDENT, EXECUTIVE PUBLISHER

Dom Rossi

VICE PRESIDENT, GLOBAL ADVERTISING

RESEARCH Wayne Eadie

VICE PRESIDENT, MARKETING Dawn Zier

QUALITY CONTROL MANAGER Ernie Salto

DIRECTOR OF OPERATIONS Thomas Tzoucalis

Issue #88, American Woodworker® (ISSN 1074-9152;
USPS 0738-710) is published seven times a year in February,
April, June, August, October, November, and December by Home
Service Publications, Inc., 260 Madison Avenue, 5th Floor, New
York, NY 10016. Periodicals postage paid at New York, NY and
additional mailing offices. Postmaster: Send change of address
notice to American Woodworker®, P.O. Box 2134, Harlan, IA
51593-0323. Subscription rates: U.S. one-year, \$23.88; two-year,
\$43. Single-copy, \$3.95. Canada one-year, \$23.88; two-year, \$43
(Canadian funds). GST # R122988611. Foreign surface one-year,
\$35; two-year, \$65 (U.S. funds). Foreign air one-year, \$42; two-
year, \$80 (U.S. funds). U.S. newsstand distribution by Hearst Dis-
tribution Group, New York, NY 10019. In Canada: Postage paid at
Gateway, Mississauga, Ontario; CPM# 1447866. Send returns and
address changes to American Woodworker®, P.O. Box 2134, Har-
lan, IA, USA 51593-0323. Printed in USA. © 2001 Home Service
Publications, Inc. All rights reserved.

Reader's Digest may share information about you with reputable
companies in order for them to offer you products and services of
interest to you. If you would rather we not share information, please
write to us at: Reader's Digest Association, American Woodworker,
Customer Service Department, PO Box 5073, Harlan, IA 51593.
Please include a copy of your address label.

Nature Made It.



Minwax® Makes It Beautiful.



Wood adds natural warmth and beauty to your home. Especially when it's finished with Minwax®. From warm, rich wood stains to protective, clear finishes, Minwax offers a complete line of easy-to-use, quality wood finishing products. Trust Minwax to make and keep all your wood beautiful for years to come.



MAKES AND KEEPS WOOD BEAUTIFUL®

www.minwax.com

©1999 Minwax Company. All rights reserved.

This Old House

PROUD SPONSOR



“Top
minivan”
—AAA *Buyer
Guide*

“Nobody
styles a
minivan
better”
—*Motor Trend*

“Readers’ choice
All-Star”
—*Automobile
Magazine*

“The best
minivan
ever”
—AMCI*

The
press is
impressed.



There's no shortage of good news about Dodge Grand Caravan. And while we couldn't be more delighted about this, frankly, it doesn't surprise us. After all, Dodge Grand Caravan is the only minivan with available features like a power rear hatch, three-zone automatic temperature control, and four-wheel disc brakes. The only thing better than hearing news like this is getting the full scoop for yourself.

See. Compare. Drive.

Dodge Grand Caravan  The Best Minivan Ever.

800-4-A-DODGE or www.4adodge.com

*Based on AMCI overall weighted evaluations of 2001 Grand Caravan vs. similarly-equipped 2000 MY competitors.

Question & Answer

Warped Wood Woes

Q. I ordered a milled piece of ebony through the mail last winter. It looked great upon arrival, but after a few days it was so warped and twisted that I couldn't use it. What gives?

*Tim Avery
Bay City, MI*

A. Watching your prized ebony turn into a potato chip must've hurt! Chances are this board had a fairly high moisture content (10 to 12 percent) when it was shipped. It arrived in a dry winter environment, where wood can have a moisture content as low as 5 or 6 percent. Your board started to dry out as soon as you unwrapped it. Attempting to keep a board from changing shape while drying is a bit like trying to stop a glacier, but here are some things to try next time:

- **Buy rough lumber.** You'll need a jointer and planer to mill it, but if you start out with thicker wood you'll have more leeway if it warps.



Stack and sticker mail-order wood as soon as it arrives.

- **Use a moisture meter.** Compare the moisture content of your new wood with old wood stored in your shop. Don't mill your new wood until it's about the same moisture content as the old stuff.

- **Paint the ends.** Wood dries out faster through its ends and can crack if it dries too fast. Paint slows down the rate at which end grain loses moisture.

- **Stack your wood off the floor.** Concrete floors can be very damp.

- **Place stickers between the boards.** All sides of your wood should be equally exposed to air so they dry at equal rates.

- **Weight your boards.** This helps keep them flat and straight, but it's no guarantee. You've done about all you can do.

Period Furniture Makers Unite

Q. I love building reproduction furniture, but I'm having trouble getting the details right. Where can I go for help?

*Charles Scott
Shelbyville, KY*

A. Bona fide measured drawings are hard to find, so your best bet is to contact professional woodworkers in the reproduction business. There's a group called the Society of Period Furniture Makers (www.sapfm.org) that may be just

what you're looking for. Don't be put off by the title; this is a bunch of folks that welcome woodworkers of all abilities. Membership is \$35 a year. Once a member, you can post questions through their Web site with some confidence that you'll get a reliable answer.

In addition to the Web site, this organization sponsors an annual conference in Williamsburg, Virginia, publishes a newsletter and holds summer workshop programs.

SANDERS?
DRILLS?
ROUTERS?
SAWS?
GRINDERS?
PLANERS?
WELDERS?
GO TO THE HOME DEPOT.
OF COURSE.

DEWALT

BOSCH

▲ DELTA

Milwaukee®

RYOBI

Makita

SENCO

PORTER+CABLE

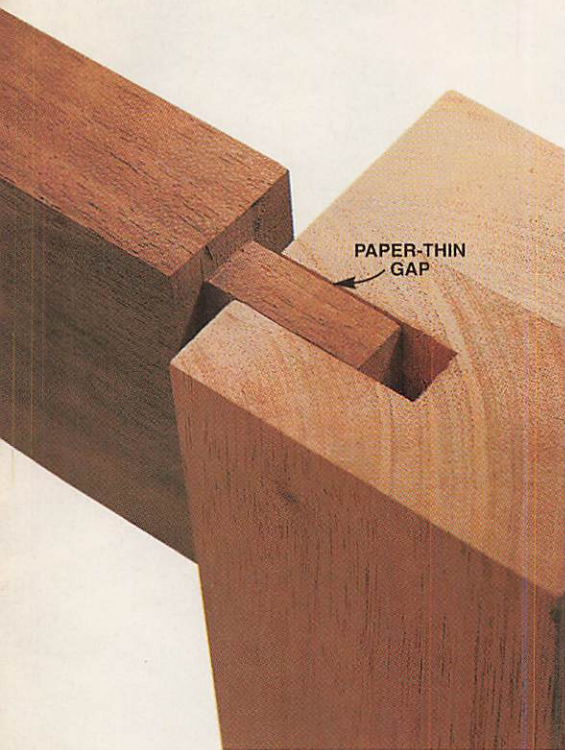
BLACK&DECKER

RIDGID

SKIL

ROTOZIP





The Right Mortise/Tenon Fit

Q. What's the right fit between a mortise and a tenon? I'm going crazy trying to measure them with a dial caliper!

Marty Valle
Florence, SC

A. You're not alone. This question has bugged just about every woodworker, but the answer doesn't lie with precision instruments.

A crusty woodworker of the old school once said, "If you need your shoe to pound a tenon into a mortise, it's too tight. If it just drops in by itself, it's too loose. If you can tap it in with your hat, it's just right." Well, nobody wears a hat in the shop any more, but you get the idea.

If the fit is too tight, your glue-up

will be a nightmare and the joint may actually fail. Water-based glues slightly swell wood, so a joint that's tight when dry becomes even tighter when wet. Way too much pressure is necessary to force out the air trapped in a tight mortise. To make matters worse, you may "starve" the joint of adequate glue if it's scraped off the mating surfaces as the tenon enters the mortise.

If the fit is too loose, the glue won't bond the tenon and the wall of the mortise. White and yellow glues shrink as they dry and at most they can tolerate a gap about the thickness of a sheet of paper. That's more or less the amount of clearance in a joint that slips together easily by hand (or hat!).

**Trade in your
coat & tie
for a shop apron.**

Call us, we'll tell you how!



**Woodcraft
Franchises
Available!**

*Premium locations
are limited!*

Please contact:
Bill Carroll
Director of Franchise Operations
Woodcraft Franchise Corp.

304-422-5412

or e-mail:
bill_carroll@woodcraft.sbrinc.com

WOODCRAFT
Helping You Make Wood Work

5300 Briscoe Road, P.O. Box 245
Parkersburg, WV 26102-0245

F01WA06Q

Woodworker's HARDWARE



We have the
largest
selection of cabinet
hardware in this
industry.
*Over 6000 items in
stock.*

**To see our full line
visit our website at:**

www.wwhardware.com

PO Box 180 • Sauk Rapids, MN 56379

24 HOUR FAX: 888-811-9850

800-383-0130

WE ARE YOUR
**COMPLETE
SOURCE**



Amana Tool®

FOR OUR NEW CATALOG OR A DEALER
NEAREST YOU CALL 1-800-445-0077.

Visit our web site at www.amanatool.com

Question & Answer

Salvaging a Rusty Plane Iron

Q. I've got an old plane that my grandfather left me. I'd like to use it, but its cutting iron is really rusty. Do I need to buy a new one?

Will Novack
Modesto, CA

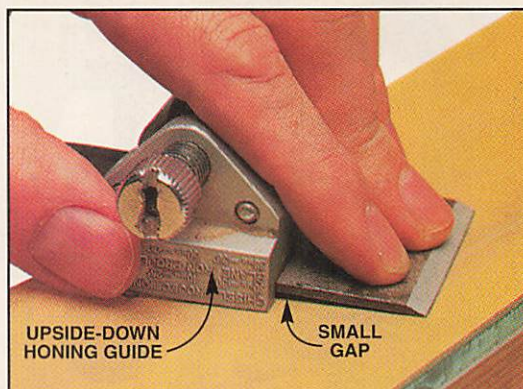
A. Don't throw away that iron yet. Flattening the back of a plane iron is usually the first step in sharpening, but you might spend hours to get down below the rust pits to clean steel. What a chore!

Here's a non-standard method that could rescue your antique plane iron. Rather than flatten the entire back, work only on the leading edge to create a very small, low-angle bevel. This will slightly increase the cutting angle of the plane, but you probably won't notice the difference.

The catch is that you must hone this back bevel at a consistent angle every time you sharpen. Use a standard honing guide to sharpen the main bevel of the iron and simply turn it upside down to create the back bevel. If you prefer to sharpen without a guide, you can create the back bevel by laying a shim on top of your stone. The shim slightly raises the blade the same way the guide does.

Source

Highland Hardware, (800) 241-6748, Standard Honing Guide; \$22.



Hone a small bevel on the back side of a rusty blade...



...to quickly get down to clean steel.

Serious Woodworkers Rely On Freud For The Sharpest Router On The Shelf.



Get precisely what you need from Freud. Visit Freud's new web site and choose from more than 1,500 items, including router bits, saw blades, power tools, dado sets, and shaper cutters. Extensive product information, including customer ratings and reviews, help you stay on the cutting edge.

Visit the Freud store at

www.amazon.com/freud

dado sets hand tools power tools
router bits router sets the Freud store
saw blades shank sets shaper cutters



Ultra Compact Dust Collector 2 hp to 15 hp Systems



Compact Filter
Cartridge Replaces
Multiple Filter Bags

Captures 99% between
0.2-2.0 Microns @ 11 FPM

**Let us design
your system today!**

Complete Ductwork Packages



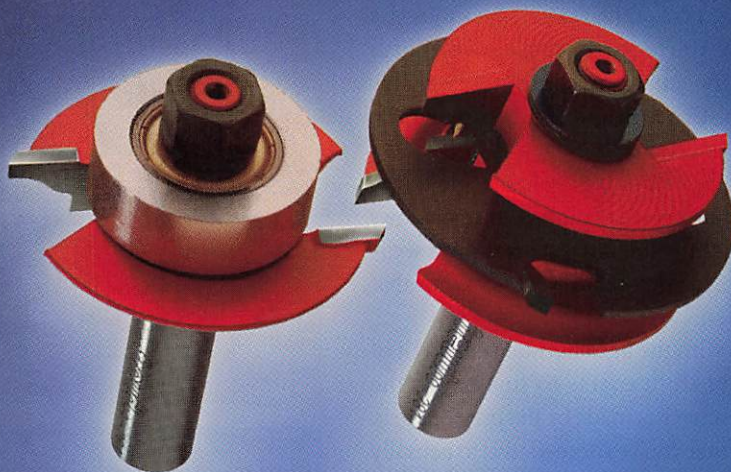
1-800-732-4065

www.oneida-air.com

1001 W Fayette St. Syracuse NY 13204




Dust collection systems & components 1.5 hp & larger

What's missing from the perfect cabinet?



The perfect glass door...and the bits to make it.

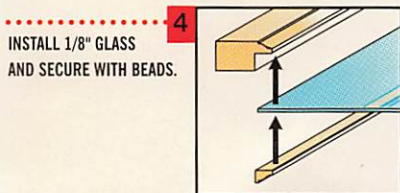Steps to Perfection




Create glass cabinet doors that look as good open as they do closed.

Freud introduces the revolutionary Recoverable Bead Glass Door Bit Set. This two-piece bit set allows you to perform two tasks at once: create stiles and rails for glass cabinet doors while also forming the beads that hold the glass in place.

This unique process ensures that your glass beads will perfectly match the wood grain of your rails and stiles. You'll never again have to purchase unsightly fasteners, saving you time and money. Plus, the exclusive profile shape eliminates splintering and creates smooth grooves, so the pieces fit together easily with less sanding.

These 1/2" shank diameter bits are easy to use, with no complicated set-ups. Choose from three popular designs: 99-281 produces an ogee profile, 99-280 cuts a quarter round profile, and 99-283 forms a beaded profile.

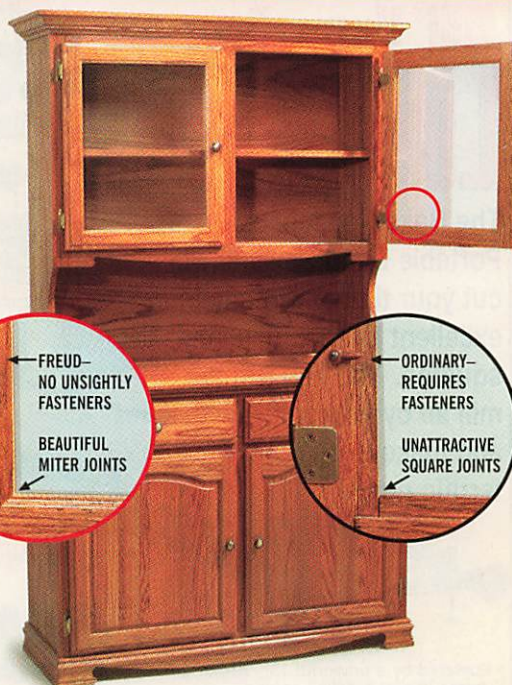Whether you're a hobbyist or a production shop, Freud makes it easy for you to create the perfect cabinet.



freud[®]

The Psychology of Woodworking

ISO 9002
CERTIFICATE REGISTRATION # 12 100 9108

FOR MORE INFORMATION CALL 1-800-472-7307.
IN CANADA, CALL 1-800-263-7016.

Question & Answer

Sanding Scratches Revealed

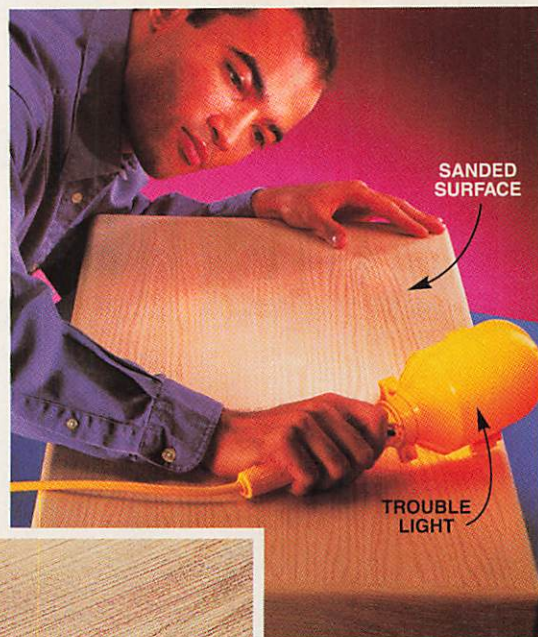
Q. What can I do to see sanding scratches before I apply stain? I always miss some of them until it's too late.

E. M. Hartz
St. George, UT

A. Doesn't that drive you crazy? Just when you should be home free, wham! Now you're stuck with a lousy finish and there's no way out. One simple measure can prevent this from happening again. Use a bright light to make the scratches visible *before* you stain.

A portable trouble light held at a very low angle to the wood makes sanding scratches stand out like long shadows at sunset. This raking light is the ultimate test for a well-sanded surface. You may see random orbit sander swirls that you never knew existed.

Check your progress with the light between each grit of sandpaper. As you move from coarse to fine paper, the trick is to remove all the scratches made by the previous grit. The only way to ensure that you've succeeded is to actually *see* the scratches, and that's where the light comes in. **AW**




Unwanted scratches pop out under a low-angle light.

Ask Us

If you have a question you'd like answered, send it to us at: **Question & Answer, American Woodworker, 2915 Commers Drive, Suite 700, Eagan, MN 55121.** Sorry, but the volume of mail prevents us from answering each question individually.

Mill Your Own Lumber!

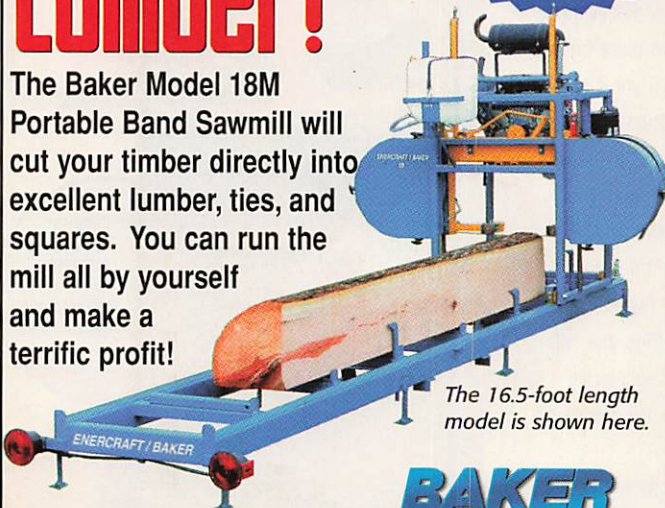The Baker Model 18M Portable Band Sawmill will cut your timber directly into excellent lumber, ties, and squares. You can run the mill all by yourself and make a terrific profit!



The 16.5-foot length model is shown here.

- Powered by a powerful 13-, 20-, or 24-horse power gasoline engine.
- Cuts logs up to 30" in diameter.
- 16'-6" log length standard capacity; other lengths available upon request.
- Baker Thin-Kerf Technology ensures easy, accurate cuts with minimal waste and lower blade cost.
- Transport the 18M behind your ATV, SUV, pickup truck, or jeep with included trailer package.
- Low budget priced.

BAKER
Products
SAWMILL DIVISION

PO Box 128
Ellington, Missouri 63638
U.S.A.

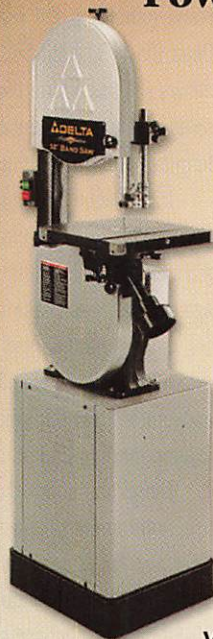
www.baker-online.com
Email: info@baker-online.com
Fax: 573-663-2787

Phone: 800-548-6914
Canadian branch: 800-387-5553

Other Baker
Models
Available!

Introducing the New Delta Store.

Tap into the Power of the Pros.



The new Delta store has over 1000 products from a complete line-up of unisaws to those hard-to-find machinery attachments. Extensive product information including customer ratings and reviews will help you choose the right tool for the job. We'll even deliver to your door for only \$5.99.

Visit the Delta store at


www.amazon.com/delta

table saws radial saws miter saws
scroll & band saws planers the Delta store
drilling machines jointers wood shapers



DELTA TAKES A SERIOUS LOOK AT WIDE SURFACE SANDING.

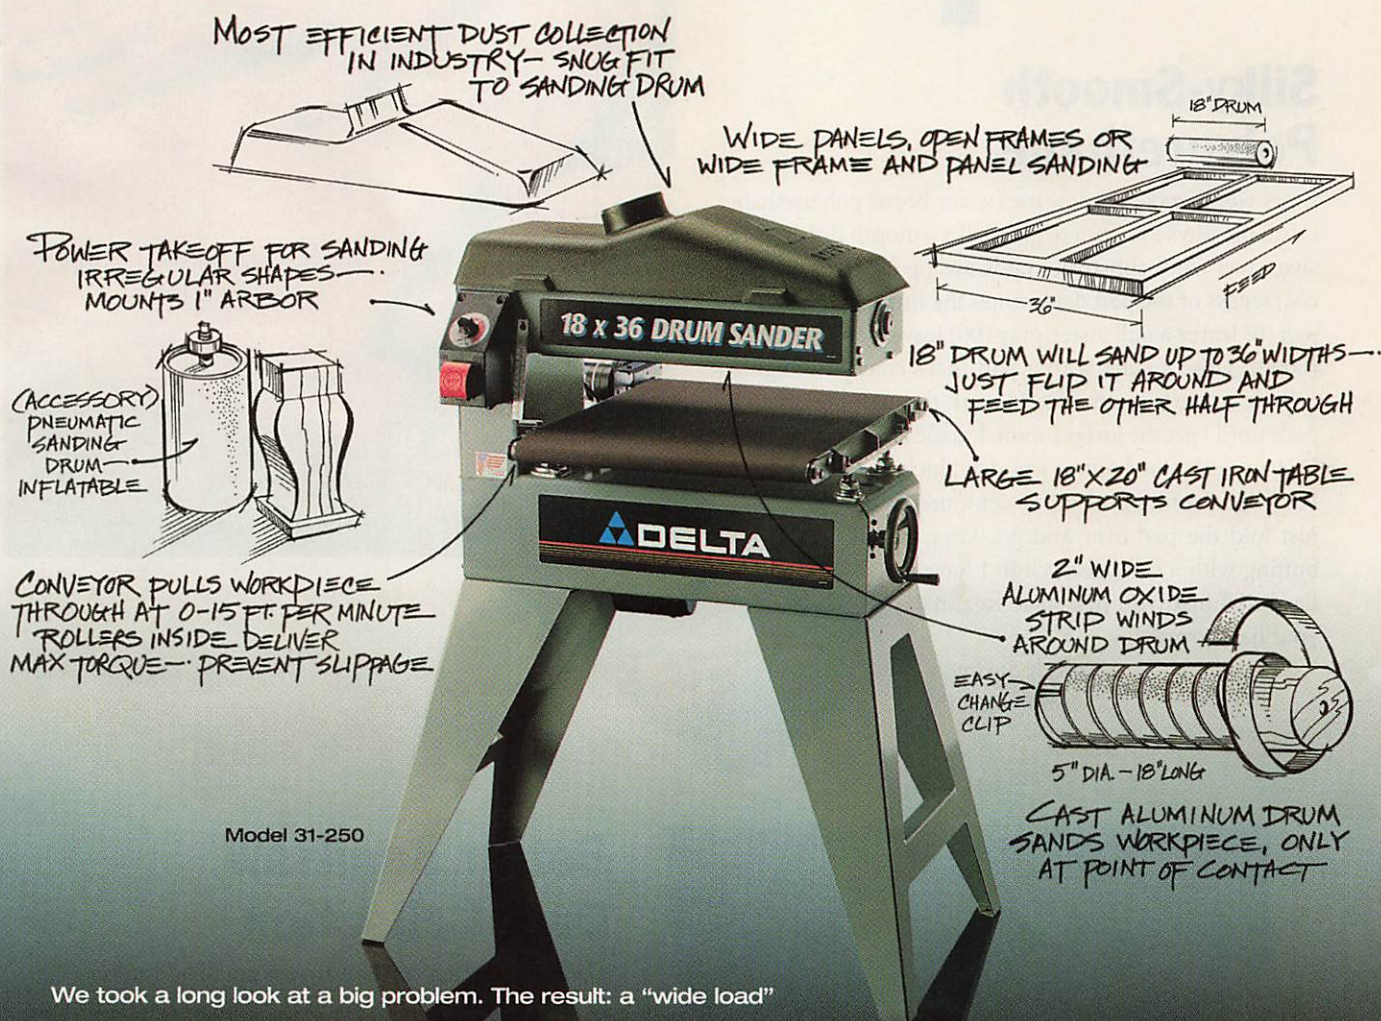Delta's new "Wide Load" Drum Sander: 36-inch wide surface sanding with a 2-inch strip.



We took a long look at a big problem. The result: a "wide load" sander that gets you past the limitations you've faced for too long. Our newest offering will very simply change the way you work. The way you design. The way you think. One visit to your Delta dealer will put you in the big time. For the name of your nearest dealer, call Delta Machinery, 800-438-2486. In Canada, call 519-836-2840. www.deltawoodworking.com



Delta is a proud sponsor of The New Yankee Workshop with Norm Abram on PBS.

SERIOUS
WOODWORKING TOOLS
SINCE 1919.

DELTA
MACHINERY
A Pentair Company

WorkShop Tips

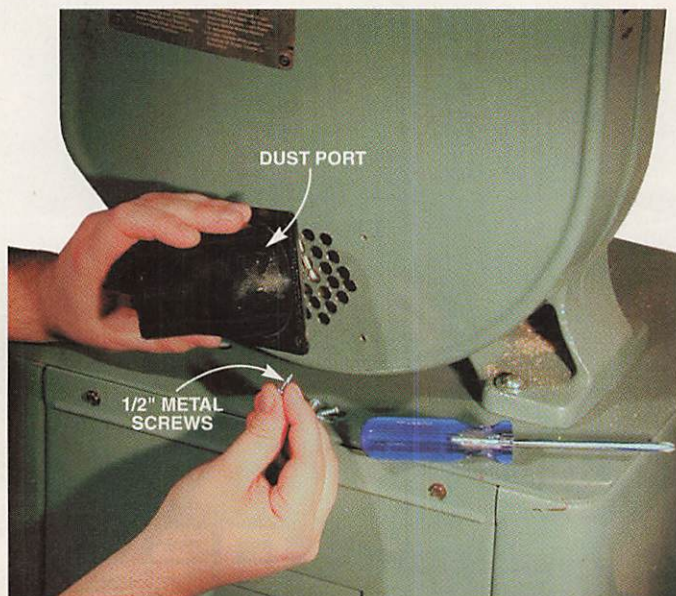
Silky-Smooth Polyurethane

Every woodworker I know uses water-borne polyurethane. Of all the ways I've seen to get a silky-smooth finish, abrasive, steel-wool substitute pads are by far the best. The coarseness of the pad determines the final sheen. A green pad (0) leaves a dull luster, gray (00) leaves satin and white (0000), gloss. I start with a pad that's coarse enough to remove imperfections. Then I work through the different pads until I get the luster I want. I made a cork-faced block (1/4-in. cork glued onto a wooden block) for flat surfaces. For edge profiles and other contoured surfaces, I just fold the pad over and go. After a final buffing with a soft, clean cloth I have a flawless finish you just have to run your hand over.

*Beverly Stedman
Hammond, IN*



BILL ZUEHLKE



Better Bandsaw Dust Collection


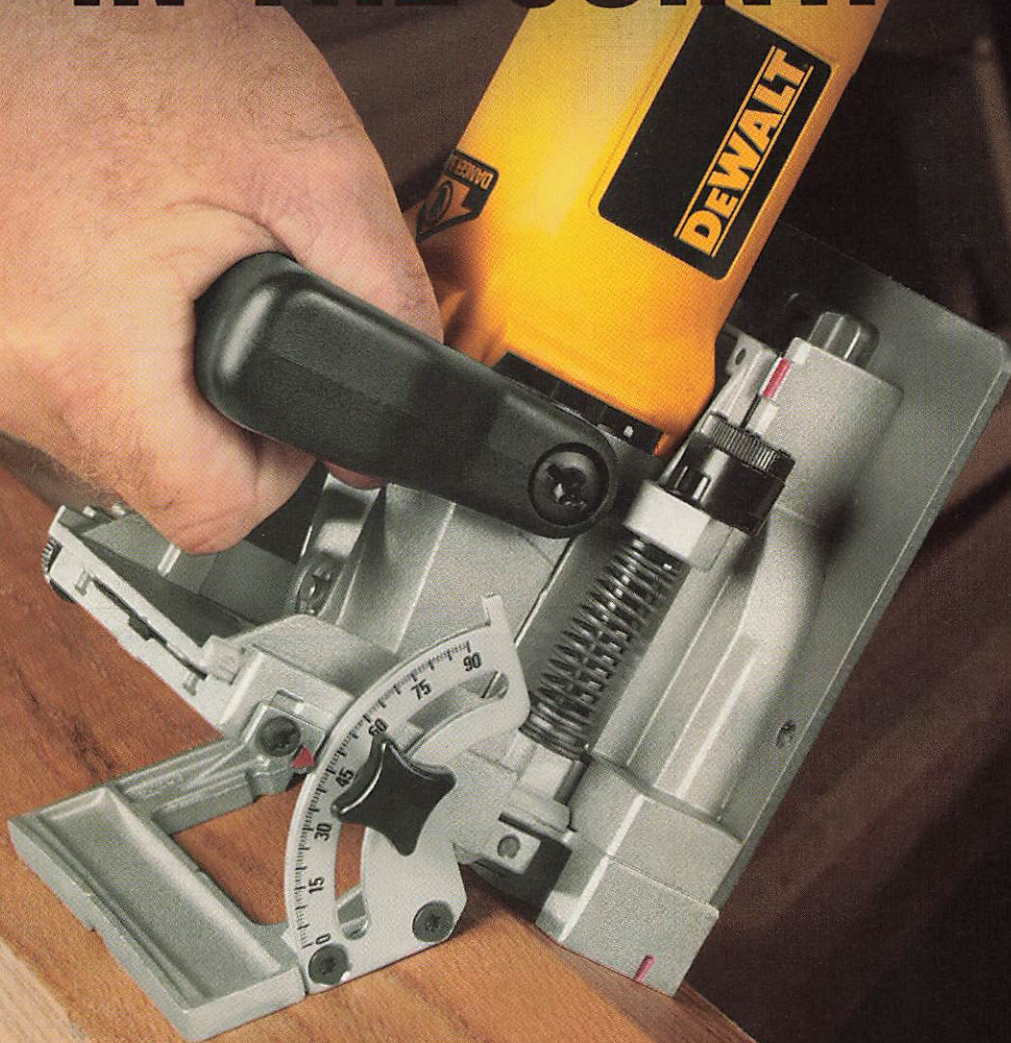
The dust port on my bandsaw is small and never worked very well. To solve this problem all I did was add a 2-1/2-in. dust port to the lower door. First I drilled a bunch of 1/4-in. holes. This is safer than one big hole which would expose the moving blade wheel. I screwed on the new dust port and hooked up my shop vacuum. Now I can really bust the dust!

*Sam Baker
Jackson, MS*


Source

2-1/2-in. dust port, # 03J61.10; \$2
Lee Valley, (800) 871-8158 or www.leevalley.com

THE BEST TOOL IN THE JOINT.



Precision — dual rack-and-pinion fence ensures the blade is always parallel to fence at any depth



Fast and Accurate Settings — integral one-piece fence easily adjusts from 0°–90° in single degree increments



Quick Outside Registration — 45° locating notch allows indexing off the outside surface of a mitered joint



Available in Cordless —
DW932K 18V Plate Joiner Kit
DW931K 14.4V Plate Joiner Kit

The DW682K Heavy-Duty Plate Joiner is loaded with features that help you achieve accurate joints every time. The one-piece dual rack-and-pinion fence ensures the blade is always parallel to the fence and makes changing the depth a breeze. The fence also makes it easy to go from 0°–90° in single degree increments for the most precise joints at any angle. The 45° locating notch allows quick setup for outside registration. The retractable anti-slip pins hold the material and plate joiner firmly in place for total accuracy. Changing biscuit sizes is also simple with preset depth stops for common biscuits. And dust extraction is convenient with either a dust bag, deflector, or shop vacuum attachment. Finally, not even the hardest of hardwoods poses a problem for its powerful 6.5 Amp, 10,000 rpm motor. Precision at every angle — it's what makes the award winning DW682K the best tool in the joint.

For more information, call **1-800-4-DEWALT** or visit our web site at **www.DEWALT.com**

©2000 DeWALT Industrial Tool Company. All rights reserved. The yellow/black color scheme is a trademark for DeWALT Power Tools and Accessories.

DEWALT
**GUARANTEED
TOUGH.™**

Workshop Tips

No Trace Screw Removal

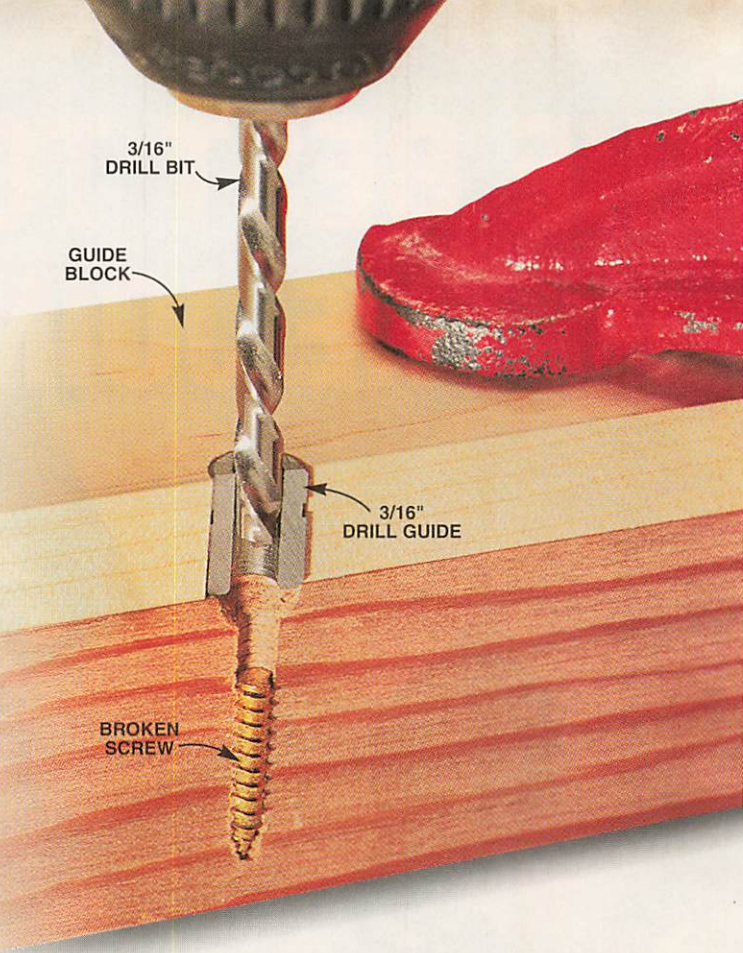
Last summer I built some outdoor furniture and used brass screws. Geez it's a pain when those screws break off. After I snapped a couple I couldn't find my screw extractor so I had to get creative!

I've got a set of steel drill guides that I use to make custom drilling jigs for shelf pegs and dowel holes. I discovered that if I put the 3/16-in. drill guide into a block of wood and clamped this assembly over the broken screw, I was able to drill it out. Then I plugged the hole with a piece of wood and some glue. Once I inserted a new screw, the fix was invisible. I've tried this with brass and mild-steel type screws but it doesn't work with hard drywall-type screws.

Ronald G. Early
Tacoma, WA

Source

3/16-in. drill guide, #821-869; \$3.
Woodworker's Supply, (800) 645-9292.



RAMON MORENO

WOW! LOOK WHAT A TYPICAL TABLE SAW CAN DO.

Convert your table saw into a molder with the Magic Molder.



**MAGIC
MOLDER™**



818.782.0226

A Division of:
LRH
Enterprises, Inc.

9250 Independence Ave. Chatsworth, CA 91311 818.782.0226 or FAX 818.909.7602
Email: sales@lrhent.com Website: www.lrhent.com

The Selection is Huge. We Built a Porter-Cable Store to Show it all.

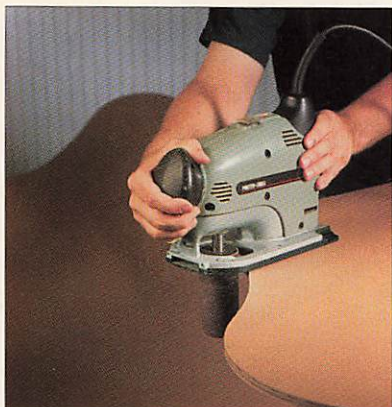
See the complete line-up of Porter-Cable products in the new Porter-Cable store. Over 900 items including pneumatics and cordless tools to the hard to find wood-working accessories. See the entire fleet of this year's new Porter-Cable products at the store that has it all.



Visit the Porter-Cable store at
www.amazon.com/portercable

routers sanders cordless tools
generators the Porter-Cable store
nailers & staplers air compressors





WHEN WORK THROWS YOU CURVES, GET EVEN.

Introducing The New Portable Oscillating Spindle Sander.



*Includes adjustable edge guide
and vacuum attachment as
standard equipment.*

We've developed a whole new concept in sanding...again.

Now, getting a nice, smooth finish on curved edges has never been easier. The new Model 121 handles even the most intricate curves. And its edge guide, with adjustable "infeed" and "outfeed"



fences, makes it ideal for straight runs, too. Either way, you get perfect, 90° edge sanding.

With the tool's variable speed capability, variety of spindle sizes

(from 1/2" up to 2"), and sanding sleeves (from 50 to 200 grit),

you have the flexibility to finish hard and soft woods, laminates,



*Different spindle sizes
let you finish even the most
intricate jobs.*



*Mounts easily beneath
Porter-Cable and other router tables
for stationary sanding of curves with
the added advantage of using the
fences for straight-edge sanding too.*

plastics, solid-surfacing materials and more. Best of all,

it's Porter-Cable quality all the way. To learn more, visit your

Porter-Cable retailer, or call 1-800-487-8665 (519-836-2840 in
Canada) for the dealer nearest you.



*Proud Sponsor of
THE NEW YANKEE WORKSHOP
on Public Television*



PORTER-CABLE
THE WOODWORKER'S CHOICE
WWW.PORTER-CABLE.COM

Workshop Tips

Remove Spilled Candle Wax

After our last family birthday party I spent an hour scraping big globs of candle wax from several tables and our wood mantel. The next day, in response to my complaining, a coworker told me to try mineral spirits next time I'm faced with wax on wood. He said it won't hurt varnish, lacquer or shellac finishes, but it does dissolve wax. I had missed one waxy mess so I poured some mineral spirits on a clean shop cloth and kept wiping until the hardened wax dissolved into the cloth. Mineral spirits removes *all* the wax, including any paste wax or polish that's been applied purposefully and it can also cut into an oil finish. It's not a big deal to re-polish or re-oil. Just don't use mineral spirits on painted surfaces. Incidentally, I discovered that mineral spirits works on ill-placed crayon masterpieces as well!

*Mac Simmons
Massapequa, NY*



BILL ZUEHLKE

Deal Yourself a Winning Hand

A Full House of
Quality Precision
Products

Proven Designs &
Outstanding
Durability



Call For
The Dealer Nearest You

Established
1988

Fisch
World Class Woodworking Tooling and Machinery

Phone: 724-663-9072 • For more information on all our quality products, visit our website at www.fisch-woodworking.com

Longer-Lasting Steel Wool

It's always bugged me that steel wool pads don't last longer. Each pad is made of thousands of sharp-edged steel strands. The problem is, they're packed together so tightly they clog up right away and most of them never get used.

I'm a die-hard twitwad, so I came up with this trick to extend the life of my steel wool. I unroll each pad and shape it into a fluffy ball before I use it. As the ball gets flattened, I stop and gently pull it back apart. Re-fluffing exposes new sharp edges and releases wood dust and broken-off bits of worn-out steel wool.

Denny Satten
Wilmington, NC

BILL ZUEHLKE

American Woodworker AUGUST 2001

21

Save Up To 50% On Home Heating Cost

And never have to buy fuel—wood, oil, gas, kerosene—ever again.

Hydro-Sil is a unique room heating system that can **save you hundreds of dollars** in home heating costs.

It can replace or supplement your electric heat, oil or gas furnace, kerosene heaters and woodstoves. Hydro-Sil is designed for whole house or individual room comfort. Hydro-Sil heating works like this: inside the heater case is a sealed copper tube filled with a harmless silicone fluid that will never spill, leak, boil or freeze. **It's permanent. You'll never run out.** Running through the liquid is a **variable watt** hydroelectric element that is **only** being supplied a **proportional** amount of power on an **as-needed basis**. When the thermostat is turned on, the silicone liquid is quickly heated, and with its heat retention qualities, continues to heat after the Hydro element shuts off, **saving you money**. This exclusive technology greatly increases energy savings and comfort.

www.hydrosil.com

You Can Do Something About the High Cost of Winter Heating

Order by Phone or Mail, Credit Card or Check • MasterCard-VISA

CREDIT ORDERS ACCT. #

1-800-627-9276 EXP. DATE

Your benefits with Hydro-Sil

- Slash Heating Cost - Up to 50%
- Lifetime Warranty - no service calls
- Safe for children & furniture
- Clean - no fumes - no smoke
- U.L. Listed
- Preamsembled - ready to use
- No furnaces - ducts - chimney
- Portable (110V) or permanent (220V)
- Whole House Heating or Single Room
- Room by Room Control

Save with Hydro-Sil: Many families are benefitting — you can too!

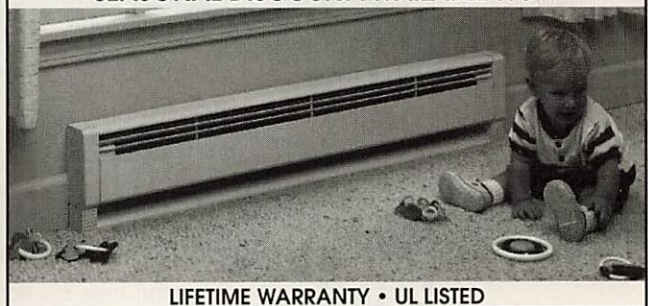
• **Consumer Digest:** Buying Guide rates Hydro-Sil "Best Buy" for heating—a product that offers outstanding value for its price.

• **Grant M. (Accountant):** "With no insulation or storm windows, I saved 51% when changing from oil to Hydro-Sil."

• **William C. (General Contractor):** "I replaced electric heat with Hydro-Sil. I am pleased to report that your units have provided comfort, safety, and considerable savings on electricity."

• **R. Hanson:** "I cannot begin to tell you how pleased I am with Hydro-Sil. First time in 25 years our electric bill was reduced - **Saved \$635 - over 40%!***"

SEASONAL DISCOUNT AVAILABLE NOW



LIFETIME WARRANTY • UL LISTED

ORDER TODAY AND SAVE • TWO MODELS TO CHOOSE FROM
PORTABLE 110 VOLT- PERMANENT 220 VOLT

| 220 Volt Permanent | Approx. Area To Heat | Discount Price | Quantity |
|--------------------------------------|----------------------|----------------|----------|
| 8' 2000 watts | 300 sq. ft. | \$259 | |
| 6' 1500 watts | 250 sq. ft. | \$239 | |
| 5' 1250 watts | 200 sq. ft. | \$219 | |
| 4' 1000 watts | 150 sq. ft. | \$199 | |
| 3' 750 watts | 100 sq. ft. | \$179 | |
| 2' 500 watts | 75 sq. ft. | \$169 | |
| Thermostats - CALL for options | | | |
| Portables (110V) Thermostat Included | | | |
| 5' Hydro-Max 750-1500 watts | | \$219 | |
| 4' Convector - Dual watt | | \$179 | |
| 3' 750 watts - Silicone | | \$169 | |
| \$15.00 shipping per heater | | \$ | |
| Total Amount | | \$ | |

NAME _____

ADDRESS _____

PHONE _____

MAIL TO: HYDRO-SIL, PO BOX 662, FORT MILL, SC 29715

Workshop Tips

No Math Octagons

I'm not a numbers guy, so I hate complicated formulas for figuring out dimensions. I'd given up making octagonal wood blanks for my lathe until I discovered this technique. No

measuring required! You can also do this on your bandsaw.

*Steve Haffner
Northrun, UT*



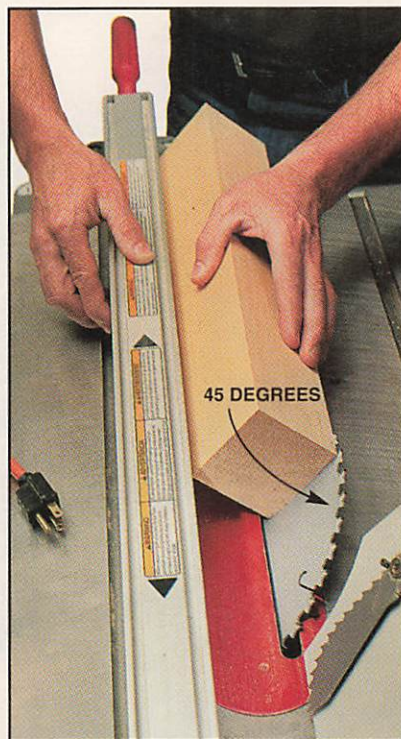
High Performance Router from Fein

This powerful new 3¼ horsepower plunge router will cut production time and give you a superior finish. Thanks to an advanced electronic feedback circuit, this state-of-the-art router operates at a consistent torque and speed for extremely smooth operation and a cleaner edge. It's lightweight for greater control, has a wider range of speeds, and includes soft start, dust collection port, and QC spindle. The new FEIN RT-1800 is designed for the cabinetmaker, solid surface fabricator and serious hobbyist. Call 1-800 441-9878 for more information and a dealer near you, or visit us on the web at www.feinus.com.

Finishing is just the beginning

Fein Power Tools, Inc. 1030 Alcon Street
Pittsburgh, PA 15220 1-800 441-9878

Fein



RAMON MORENO

Step 1: Tilt your tablesaw blade to 45 degrees. Rest the stock flat against the blade and slide the fence over until it touches the corner of the stock. Then lock the fence into position.



RAMON MORENO

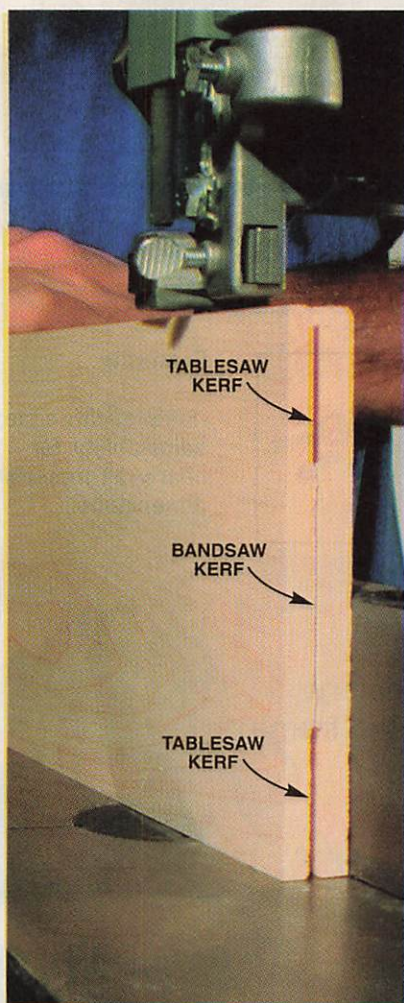
Step 2: Lower the blade half way. Then lay the stock flat and saw off the corners.

Workshop Tips

Easier Resawing

I'm stuck with a wimpy 1/2-hp bandsaw that stalled whenever I tried to resaw anything tall. Then my neighbor turned me on to a technique that solved my problem. I precut a 1-1/2-in.-deep kerf in each edge of the board with my tablesaw and do the final cutting on my bandsaw. Now I can take advantage of the full 6-in. capacity of my bandsaw and it only has to do half the work. My neighbor has a 3/4-hp bandsaw with a riser block and he says it helps him resaw boards a full 12 in. wide.

Rob Charles
Lindville, LA



JOINTech
Ultra-Precision Woodworking Systems

CabinetMaker's System® shown on
Routing Center. (plans available)

When You Want...
the highest precision
the most accurate Saw Fence
the absolute highest quality
or a precision fence for your
Shopsmith® Machine
.....Choose Jointech

To Request A Catalog, Call 1-800-619-1288
Or Go To: www.jointech.com

CabinetMaker's System® shown on
Jointech SawTrain™ with 6" Rails.

SawTrain™ Features a 5-point Locking System,
Absolute Parallelism, Large Rip Capacity, Vacuum
Fence, Micro-Adjustability and .001" Repeatability

Think Jig.



**The World's Best
Router Joinery Jigs**

Thinking Jig? Think Leigh.
Whether you're a hobbyist or a

professional, the Leigh Jig will
help you create your best work.
Versatility with precision make
the Leigh Dovetail Jig better than
the rest. Rout through and half-
blind dovetails, with variable
spacing of pins and tails, on one
jig. Create decorative Isoloc joints,
finger joints, and multiple

mortise & tenons easily with
Leigh attachments. And our
easy-to-follow user guide will
help make it happen fast! Call
toll free now to learn more.

LEIGH
Joining Tradition With Today

Call For Your Free Leigh Catalog Today! 1-800-663-8932

Leigh Industries Ltd., PO Box 357, Port Coquitlam, BC, Canada V3C 4K6 Tel. 604 464-2700 Fax 604 464-7404 Web www.leighjigs.com

Workshop Tips

Disposable Guide Blocks

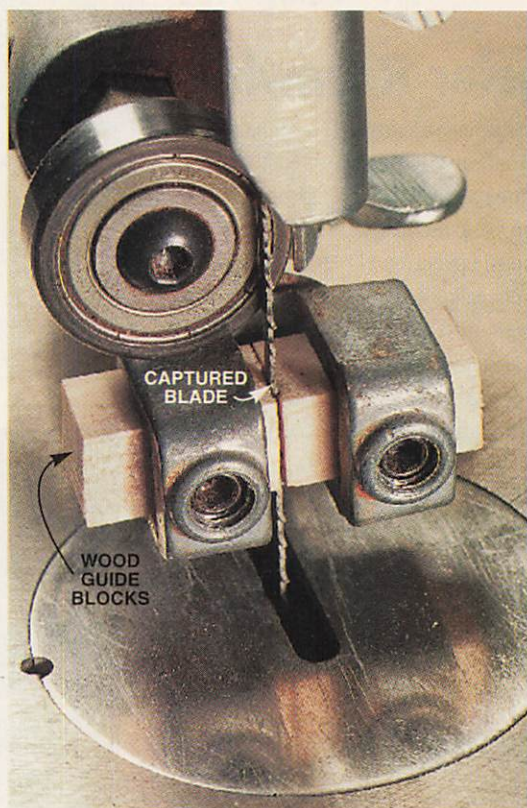
I've bandsawed hundreds of puzzle pieces using very small blades. I gave up on the steel guide blocks that came with my saw because when those little blades came in contact with the blocks, they'd dull right away. And, when I wanted to back out of a cut, the blade would pop out of the blocks.

Now I make my own guide blocks from scraps of hardwood. My blades last longer and don't pop out or wander because they're trapped between the wooden blocks. The blocks wear, but it's so easy to just re-cut their ends or make new ones altogether.

With the bandsaw unplugged, I install the new blocks by pushing them toward the blade until they're lightly touching it. Then I lock the blocks in place and spin the upper blade wheel to make sure they don't drag on the blade. **AW**

If you have an original Workshop Tip, send it to us with a sketch or photo. We pay \$200 for each one we print. Send to: **Workshop Tips, American Woodworker, 2915 Commers Drive, Suite 700, Eagan, MN 55121.** Submissions can't be returned and become our property upon acceptance and payment.

Kendrick Greene
Perry, FL



RAMON MORENO

Wide Belt Performance

...At
About
1/3 the
Cost!

5-Year
Warranty
30-Day
Free Trial!
Made in
U.S.A.



Cabinet shop owners across the U.S. call Woodmaster's 26", 38" and 50" drum sanders "the best kept secret in woodworking." These commercial-duty sanders fill the niche between slow hand methods and expensive wide-belt sanders. And there's no sacrifice in quality.

But don't take our word for it...call today for free facts and the names of Woodmaster owners nearest you. This way, you can find out first-hand how a Woodmaster sander might be just the machine you've been looking for.

1-800-821-6651

Ask for extension DB66

Woodmaster Tools, Inc. 1431 N. Topping Ave. Kansas City, MO 64120

Introducing, the Kreg Jig® K2000 ProPack...



Featuring...

-Simple, three-step
adjustability for
nearly all material
dimensions.

Pocket hole joinery,
think outside the frame.



Kreg Tool Company
201 Campus Drive
Huxley, IA 50124

www.kregtool.com
1-800-447-8638



Shaves time off projects.

Spending extra time on a project because of your passion for woodworking is one thing. Time wasted on mistakes, however, is not acceptable. So use the tools that have the power and features to deliver accurate, reliable results. The first time. Every time. Without question, the RIDGID 13" Portable Planer has everything serious woodworkers demand. For starters, there's a healthy 15-amp Emerson motor, and an extra set of dual edge, quick-change knives.

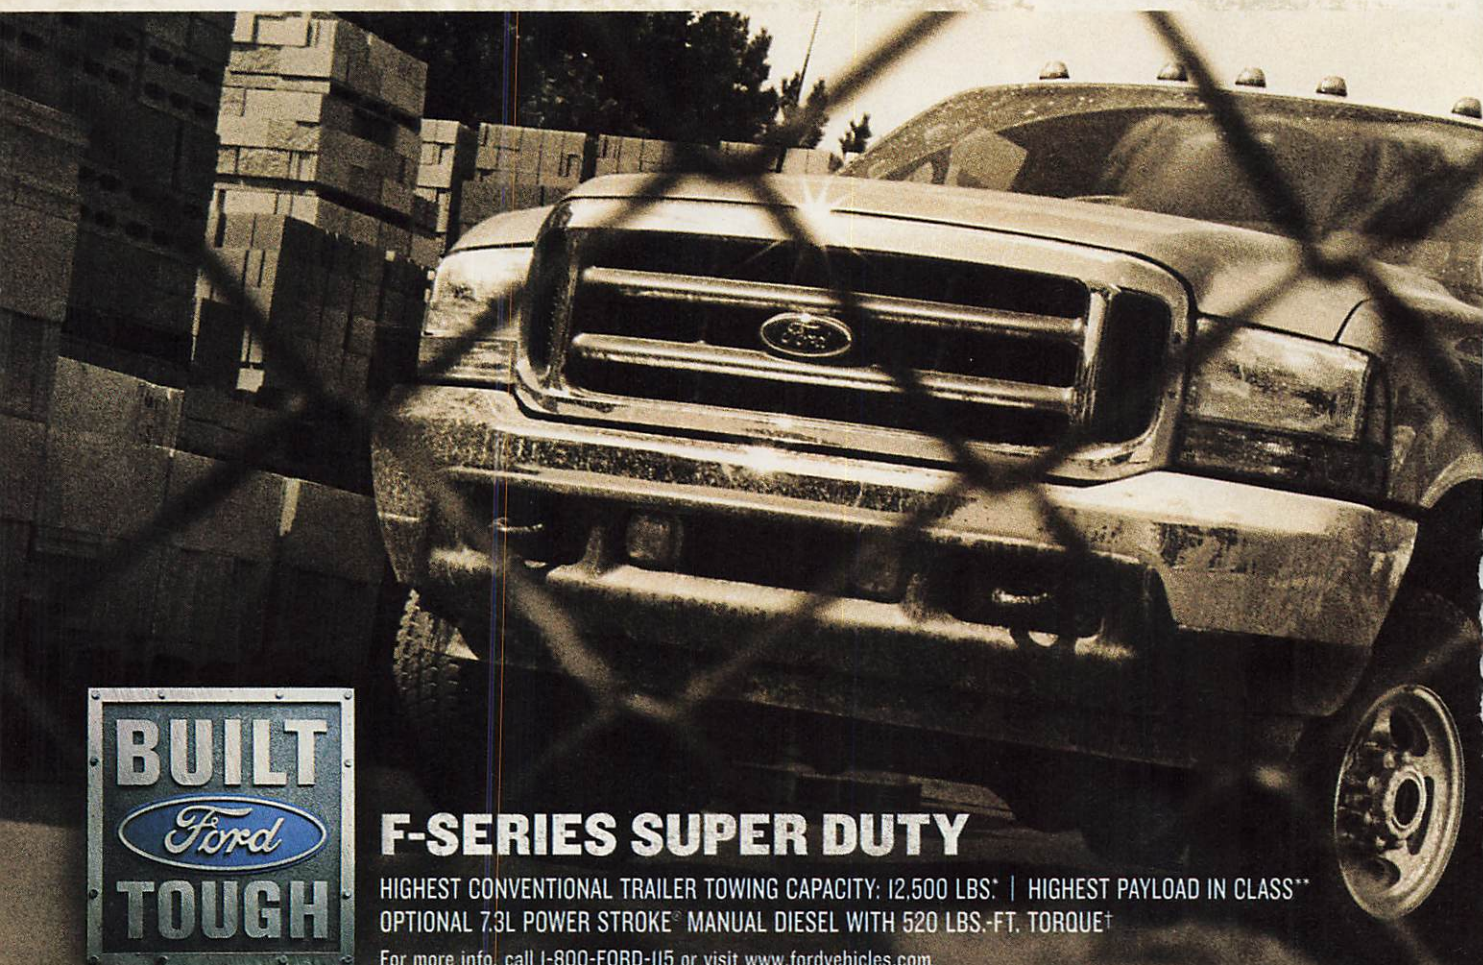


Sure-Cut. Virtually "snipe" free finishes.

So you'll be plowing through stock, producing mirror-like finishes, not wasting time with nicks or re-sharpening. With Ind-I-Cut™ and Repeat-A-Cut™, you'll know exactly how much

material will be removed, and that every piece exiting the machine is precisely the thickness you want. And there's the Sure-Cut™ mechanism to isolate the cutterhead and minimize snipe, waste and finishing time. So do yourself a favor. Get the only planer backed by The RIDGID Lifetime Warranty. You'll finish your project with far less hassles, and more time to spare.

YOU KNOW ALL THOSE
"BEFORE" AND "AFTER"
SHOTS
IN DO-IT-YOURSELF MAGAZINES?



F-SERIES SUPER DUTY

HIGHEST CONVENTIONAL TRAILER TOWING CAPACITY: 12,500 LBS.* | HIGHEST PAYLOAD IN CLASS**
OPTIONAL 7.3L POWER STROKE™ MANUAL DIESEL WITH 520 LBS.-FT. TORQUE†

For more info, call 1-800-FORD-115 or visit www.fordvehicles.com

THIS IS WHAT YOU NEED "DURING."

THEY MAKE IT LOOK SO EASY. A GAZEBO. A BRICKED PATIO. A NEW GARAGE. ALL IN A PAGE OR TWO. IN THE PICTURES, EVERYONE'S SMILING. EVEN THE GUYS DOING THE WORK. AND WHY NOT? WITH AN AVAILABLE DIESEL THAT DISHES OUT MORE TORQUE AND HORSES THAN EVER, THE TERM "DO-IT-YOURSELF" IS KINDA RELATIVE.



*Properly equipped models built after 12/4/00. **Full-size pickups. †Models built after 10/2/00.

Product Reviews

Cabinet Saw for Less than \$1,000!

Okay, so it's only less by a penny. At \$999.99, the Jet JWCS-10A bridges the gap between contractor's saws and industrial cabinet saws.

Compared to the open-leg design of a contractor's saw, the JWCS-10A's base improves stability and dust control. Its motor is mounted inside the base, directly under the arbor, instead of extending behind the table. This vertical arrangement lowers the saw's center of gravity and allows a smaller footprint. An angled sheet-metal trough, located inside the enclosed base under the motor, improves dust collection even further. It directs sawdust right to the 4-in. dust port, which is located on the side, under the motor cover.

The JWCS-10A's trunions, like those on a contractor's saw, are mounted to the underside of the cast-iron table. They support a right-tilting arbor with adjustable positive stops. The 1-3/4-hp., totally enclosed, fan-cooled

(TEFC) motor has plenty of power. We had no trouble ripping 1-3/4-in.-thick kiln-dried ash using a 50-tooth carbide combination blade. Unlike an industrial cabinet saw, the JWS-10A runs on 120-volt household current, although it requires a 20-amp circuit.

The saw table is flanked by a cast-iron extension on the left and a wider wooden one on the right. This wooden table extends to the end of the 30-in. fence rails. The Xacta Fence, a compact three-locking-point, parallel-side design with plastic faces, is standard. 52-in. long rails are available for an extra \$100.

The Jet JWCS-10A joins the DeWalt Woodworker's Tablesaw (DW746; \$900) in a cool new category of tablesaws designed for the serious woodworker's shop. These saws are similar to industrial cabinet saws, but not as heavily built. The best news is that this category now offers two distinct choices. Jet has taken a conservative approach. The JWCS-10A uses time-tested component designs to produce a scaled-down version of a classic industrial machine. The DeWalt DW746 is innovative, from its blade-shroud dust collection system to its optional sliding table (\$450).

10-in. Tilting-Arbor Cabinet Tablesaw with Xacta Fence and 30-in. rails, JWCS-10A-PF; \$1,000

With 52-in. rails, table board and legs, JWCS-10-PFX; \$1,100

Jet Equipment and Tools, Inc., (800) 274-6848

www.jettools.com

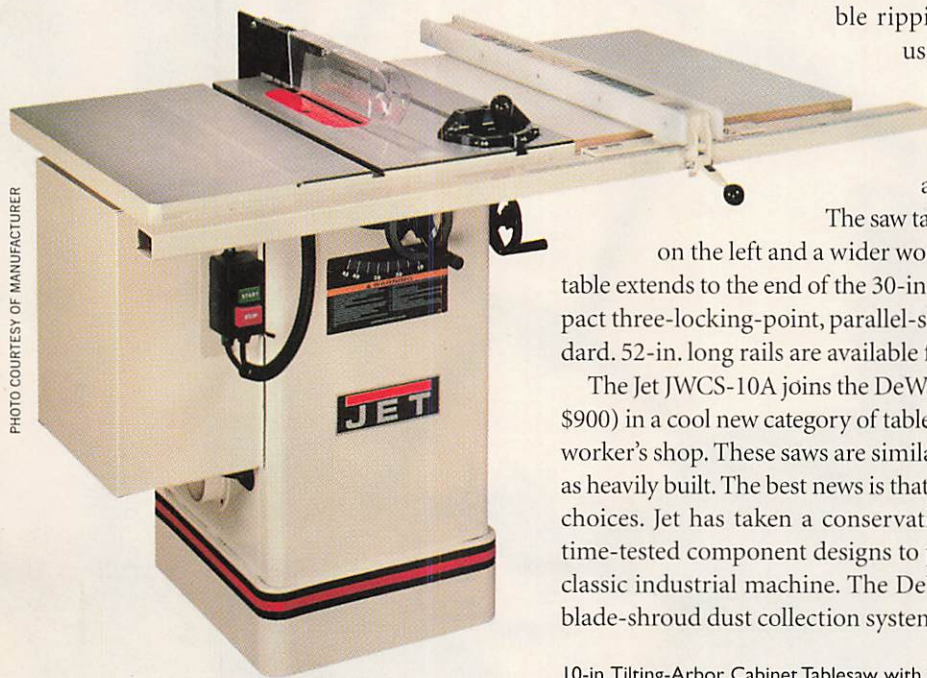


PHOTO COURTESY OF MANUFACTURER

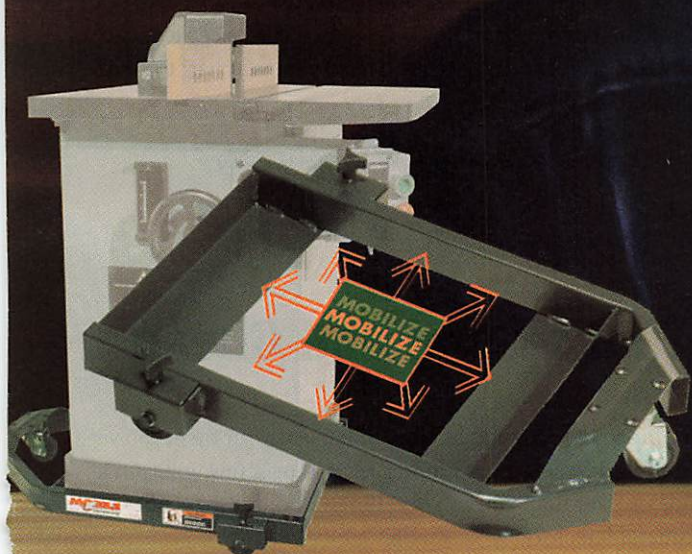
Can you move several thousand pounds of shop machines alone?

I have the typical garage problem: cars, lawn mower, garden tools, bikes, kids toys, etc. and not enough space to share with my heavy shop machines.

When I mobilized my shop machines and workbench, I created the space I needed to do my projects without sacrificing family storage space.

Have the freedom to move your machines, create an organized, safe and spacious work area, and allow for additional machines with easy shop cleanup.

You can, with a mobile base from HTC Products.



- Premium mobile bases in over 1000 custom-fit sizes
- Capacities to 1,500 lbs.
- Stable 3-point self-leveling design that lifts shop machines only 3/4" from floor
- Seamless welding with all-steel tubular construction
- Tough powder coat finish – environmentally friendly
- The original premium mobile base invented by HTC in 1980
- Lifetime warranty on all mobile bases • Made in the USA

"We'll put these bases under our machines anyday!"

— Wood Magazine

Call toll-free, 1-800-624-2027

for your nearest dealer and your FREE, full color Shop Solutions Catalog.

HTC Products Inc.
P.O. Box 839
Royal Oak, MI 48068-0839

©HTC Products, Inc. 2000

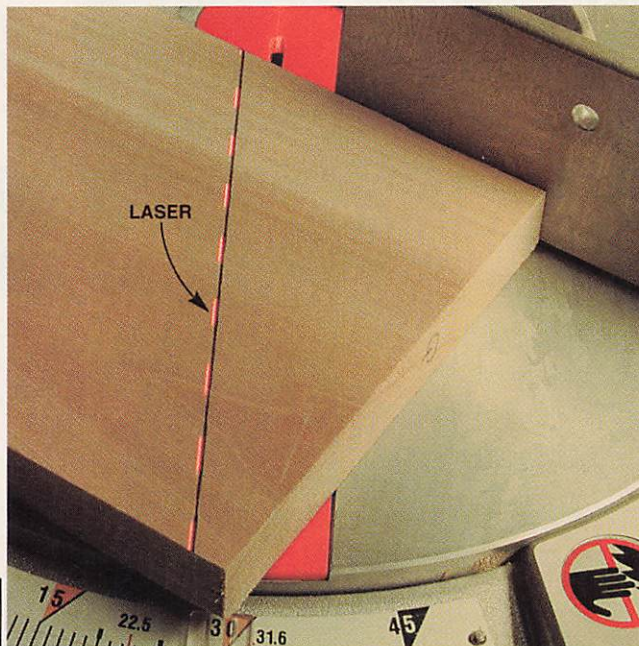


Product Reviews

Affordable Laser-Guided Saw

Remember the steel-cutting laser that almost bisected James Bond in *Goldfinger*? Now, for \$200, you can have a laser/cutting machine of your very own. True, the Laser Trac system on Craftsman's new 10-in. compound miter saw doesn't actually cut, but it sure *helps* you make accurate cuts. The battery-powered laser is contained in a disc that mounts on the saw spindle and functions as the blade's thrust washer. The laser makes alignment fast and easy.

The laser beam stays put at the left edge of the blade, no matter what kind of straight, angled or compound cut you make. The only drawback is that you



THE LASER APPEARS AS A DOTTED LINE through the blade guard, indicating it's safe to adjust the workpiece. As the blade is lowered, the guard retracts and the beam becomes solid.

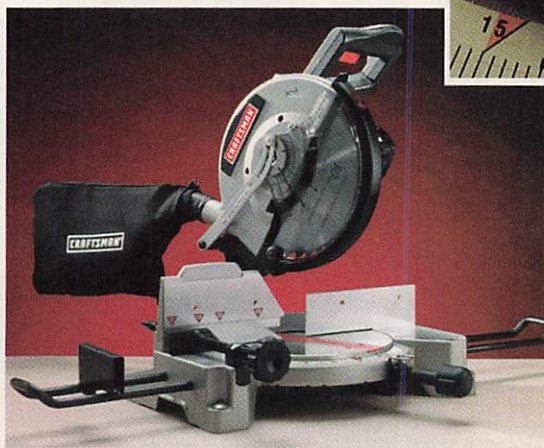



PHOTO COURTESY OF MANUFACTURER

can't activate the laser beam without starting the saw. Instead, the blade guard is slotted so you can position the workpiece safely while the saw is running.

This saw has a comfortable D-grip handle, table extensions, an adjustable 4-in.-high fence and comes equipped with a 40-tooth carbide-tip blade. Its 15-amp motor has external brushes and an electric brake. The owner's manual is very detailed and even contains a chart to assist set-up for cutting compound angles.

Craftsman 10-in. Compound Miter Saw with Laser Trac, #24315; \$200
Sears
(800) 377-7414
www.sears.com/craftsman

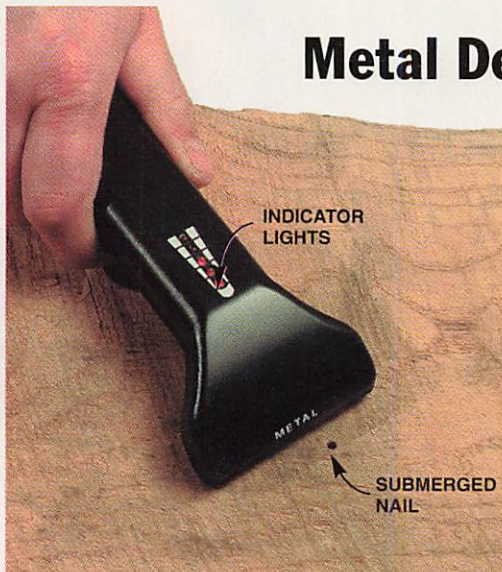Metal Detector That's Good and Cheap



If you're planning to use recycled lumber, or harvest your own, you've *gotta* check it for hidden metal. A submerged nail or screw will ruin a \$100 saw blade quicker than you can say "IknewIshouldaspent\$20ona LittleWizardmetaldetector!"

This battery-powered unit scans for metal up to 2-1/2 in. below the surface and signals with LED lights and an audible tone when it finds some. The business end is only 2-in. wide, so it takes time to check a board completely. The best way to cover the surface is to establish a grid, working from end to end, first with the grain, then across.


The Little Wizard may not be the fastest metal detector to use, but for the money, it can't be beat.

Little Wizard Metal Detector, #37539; \$20
Hartville Tool, (800) 345-2396. www.hartvilletool.com



Takes the edge off the toughest sanding jobs.

Contours. Edges. Inside curves. You name it. Only the RIDGID Oscillating Edge Belt/Spindle Sander lets you tackle all these sanding tasks with just one tool. The 4" x 24" belt sander quickly and efficiently sands end grain, faces, and edges. The range of spindles provided lets you accurately sand curves from as little as 1/2" to more than 3" in diameter. And conversion from belt to spindle mode is tool-less and takes just a few seconds. The durable cast aluminum worktable tilts from 0° to 47° for precise bevel



Converts from a belt sander to a spindle sander in seconds.

sanding. The tough polypropylene base won't rust or dent, yet provides a large, stable footprint when mounted to sawhorses or on a shop bench. And the

quiet Emerson induction motor powers a patented belt and pulley-free drive to provide years of trouble-free performance. It's the highest rated by WOOD magazine for performance and value—5 out of 5 stars. And just like all RIDGID tools, it's backed by a Lifetime Warranty.

RIDGID
TOOLS FOR A LIFETIME



Product Reviews

Excellent Miter Gauge

Buying a top-quality miter gauge for your tablesaw is a sure-fire way to improve your woodworking. At a street price of around \$100, the new Miter 1000 from Incra is a great buy. It retains the important features from an earlier Editors' Choice winner (AW #81, August 2000) for \$70 less.

The protractor head is precisely indexed every 5 degrees over a 180-degree range (± 90 degrees) with additional stops

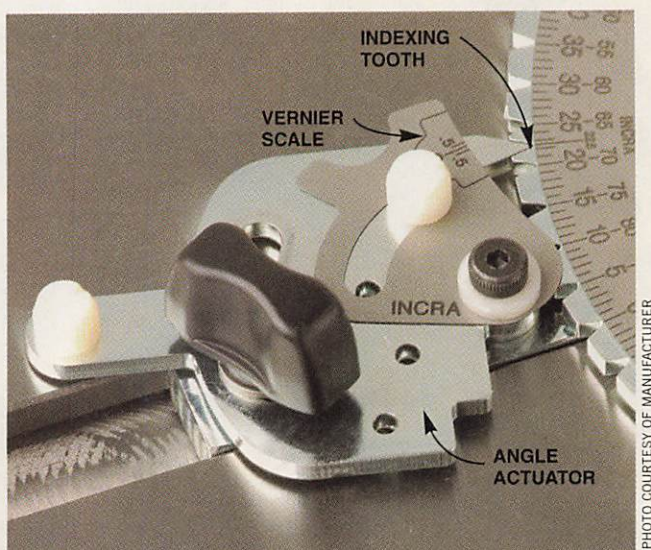


PHOTO COURTESY OF MANUFACTURER

at $\pm 22\frac{1}{2}$ and $\pm 67\frac{1}{2}$ degrees. Any angle that isn't indexed is easily dialed in using the vernier scale. The bar includes expansion discs so you can fit it precisely to your saw's miter slot. The 18-in.-long extruded aluminum fence is fully adjustable left or right and includes a scale and a sliding stop.

Incra Miter 1000; \$100
Taylor Design Group, Inc.
(972) 418-4811
www.incra.com

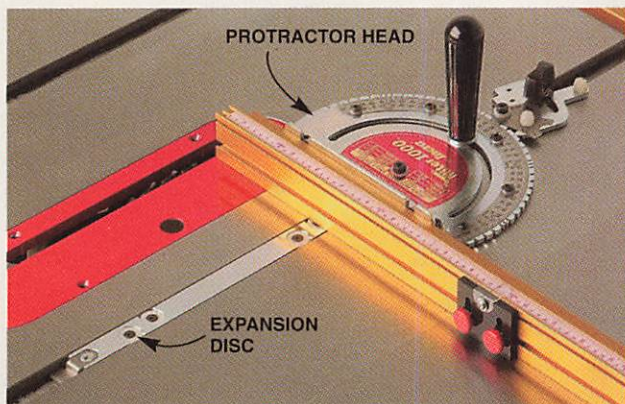


PHOTO COURTESY OF MANUFACTURER

RESTORE FURNITURE

Make \$200-\$1,000 a day!



Success

Quick Cash Return
Low Start-up Costs
Wholesale Supplies
3000+ shops
Unlimited Market
Turnkey Business

Security

Perfect 2nd Career
Part-time, Full-time
Great Add-On Business
Men, Women & Family
Retirement Business
No More Job Stress

Support

Safe, Fun, Easy
Not a Franchise
Turnkey Kits
Advanced Classes
Tech Support Line
No Experience Necessary
Nat'l Affiliation Advantages

Leasing &
Financing
Available

Professional

Latest Techniques
Stripping
Finishing
Parts Making
Resilvering
Repairing
Veneering

★Free Catalog ★ Free Preview Video ★ Free Workshop★



MINUTEMAN

World's Most Successful!

1-800-733-1776

e-mail: minuteman@jefnet.com ♦ Fax 920-478-3966

THE KEHOE JIG

Limited Only By
Your Imagination



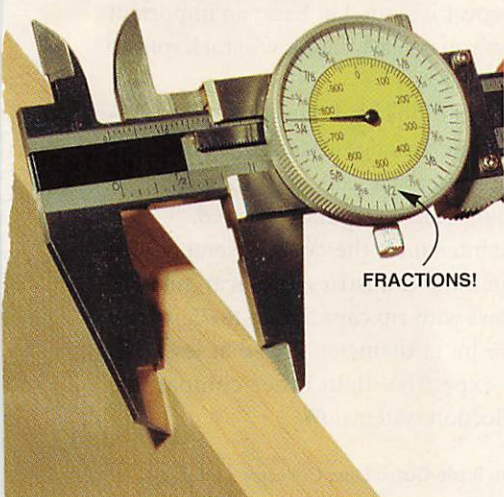
www.dovetailspline.com

Call Toll Free

1-800-368-8245 • 1-877-Kehoe-Jig

Product Reviews

Dial Caliper Speaks Our Language



I confess. I've always had trouble deciphering dial calipers that are calibrated in decimals. This stainless steel gem indicates in *fractions*—measurements I'm more at-home with. Thicknesses down to 1/128 in. are clearly indicated because the fraction scale is the biggest one on the dial. A smaller decimal scale occupies the dial's center. Both English and metric measurements can be read from rules on the beam.

Dial calipers are most often used to measure thickness, and are indispensable aids for milling lumber, sizing tenons or measuring the diameters of dowels or screws. By using a second set of jaws, they measure inside widths (of mortises or dadoes) just as precisely. Depth measurements are also possible. Every woodworker should have a dial caliper. At less than \$40, this is the one to get.

Woodworker's Dial Caliper
06.50.08; \$37
Highland Hardware
(800) 241-6748
www.highlandhardware.com

Quality Pen Kits and Other Turning Kits



- Designers & Manufacturers
- Wholesale & Retail

The Berea Hardwoods CO. Inc.

Manufacturer of quality writing instruments, components and kits.

CALL FOR FREE CATALOG

6367 Eastland Rd. • Brookpark, Ohio 44142 U.S.A.

Ph: 440-234-7949 • Fax: 440-234-7958 • E-mail: bereahard@aol.com

www.bereahardwoods.com

Measure Twice. Glue Once.

Hardwoods, softwoods, pressure-treated or exotics – Gorilla Glue® is tough enough to hold them all. Incredibly strong, nearly invisible glue lines, and 100% waterproof. Just the way serious woodworkers demand it. Call 800-966-3458 for a dealer near you, or visit www.gorillaglu.com to find out more.



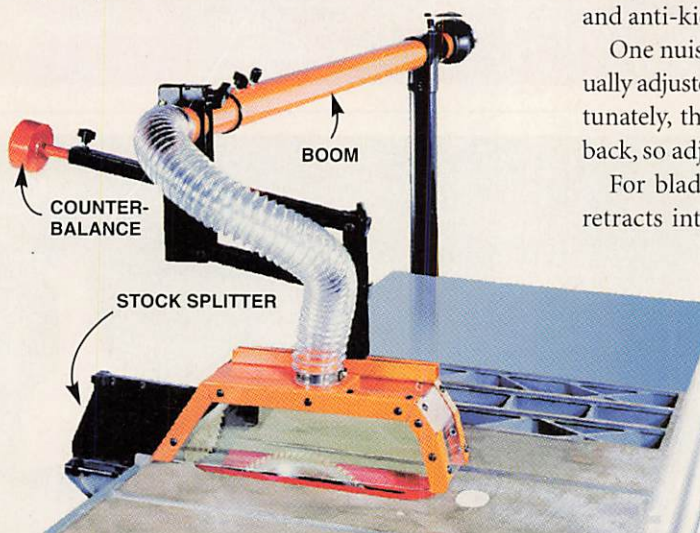
The Toughest Glue
on Planet Earth™



Product Reviews

Dust-Sucking Blade Guard

Surveys reveal that 99.99 percent of all woodworkers *hate* the blade guard that came with their tablesaw. All 99.99 percent of us should consider Penn State Industries' new overarm blade guard/dust collector. It's a huge improvement.




The blade cover is made with clear, shatter-resistant acrylic. It's big, wide and fully adjustable front-to-back and side-to-side. Dust is evacuated through a clear 2-1/2-in.-dia. hose and a standard 4-in. fitting at the end of the boom. The cover is slotted in back; an important safety feature because it allows you to leave your saw's stock splitter and anti-kickback pawls in place.

One nuisance is that the height of the blade cover must be manually adjusted before cutting, for each change in stock thickness. Fortunately, the cover is nicely counterbalanced, with the weight in back, so adjustment is easy and your view is unobstructed.

For blade changing or maintenance, the cover assembly arm retracts into the boom. Penn State Industries' overarm guard is designed for saws with rip capacity up to 75 in. and blades up to 16 in. in diameter. Priced at less than \$300, it's less expensive than other comparable guard/dust collection systems. **AW**

Industrial Overarm Blade Guard/Dust Collector
TSDGI; \$298
Penn State Industries
(800) 377-7297
www.pennstateind.com

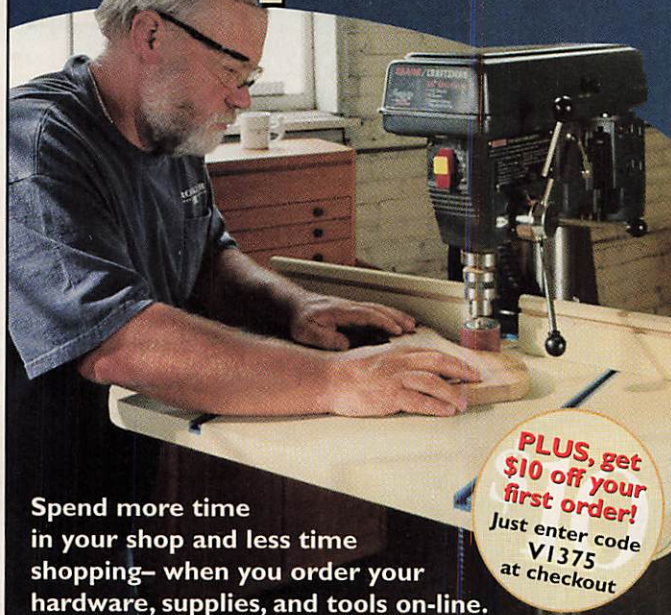Need more shop time?




Spend more time
in your shop and less time
shopping— when you order your
hardware, supplies, and tools on-line.

Rockler.com
WOODWORKING SUPERSTORE

**PLUS, get
\$10 off your
first order!**
Just enter code
V1375
at checkout

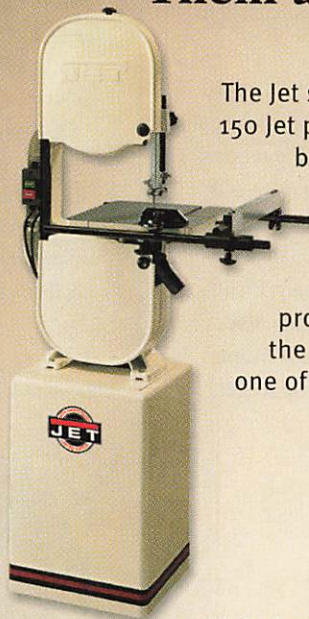Jet...the Power to Shape Your Ideas. And the Store to Make Them a Reality.



The Jet store is now open with over 150 Jet products in stock, including best sellers and hard-to-find attachments. Complete product information including customer reviews make comparing products quick and easy. Visit the Jet store and see why Jet is one of the fastest growing brands in the industry.

Visit the Jet store at

www.amazon.com/jet

dust collectors jointers planers
saws wood lathes the Jet store
shapers sanders planer-molders



Bonds Everything ~~But~~ ^{including} The Kitchen Sink.

For over 50 years, Titebond® glues and adhesives have set the industry standard for excellence in performance and application. Introducing the HiPURformer™ Advanced Bonding System. It combines the highest-quality polyurethane hot-melt adhesives with the most efficient, cost-effective application system.

Throw in the kitchen sink and you've got the perfect solution for all your bonding needs.

brick, plastics, concrete, melamine, wood, ceramic... even the kitchen sink.
leather, porcelain, marble, metal, glass, FRP, stone, foamboard, textiles (fabrics), moldings

Don't let this unique opportunity go down the drain. Call today for more information on how the HiPURformer™ Advanced Bonding System will improve your woodworking, remodeling and repair experience.



Franklin International
Columbus, Ohio 43207 • 800-347-4583 • titebond.com

Visit us at
Booth #3798 at the
AWFS Woodworking Fair

Red Oak Plywood

Here's how to get the most from this popular and economical material.

Oak plywood has been used to make all kinds of good-looking furniture, including classic Arts and Crafts-style pieces, for almost a century. There's no reason why you can't get great results when you use this economical substitute for solid oak. All you have to do is pay attention when you choose and use it. I'll show you how to pick good-looking sheets of oak plywood. Then I'll give you some tips for cutting and finishing that'll help make your project look great.

Rotary-Cut Oak Plywood is Economical

You can find red oak plywood with plain-sliced and rift-sawn faces, but rotary-cut accounts for 70 percent of what's on the market. The oak ply you'll see at home centers is usually a mid-grade rotary-cut. Hardwood lumberyards carry higher grades than home centers and stock more expensive plain-sliced and rift-sawn oak ply in addition to rotary-cut. While going straight to the hardwood lumberyard is necessary for some projects, it's almost always worth it to check out the rotary-cut oak ply at the home center first.

Higher grades come with significantly higher prices. Top-grade sheets of 3/4-in. rotary-cut ply cost around \$60; up to 50 percent more than mid-grade. Fortunately, the differences between these grades are based on defects that often have little effect on overall appearance.

(continued on page 38)

The difference between rotary-cut and plain-sliced oak plywood isn't as distinctive as it used to be.



This great-looking oak Hoosier cabinet features extensive use of inexpensive, garden-variety rotary oak plywood (see AW #77, Dec. 1999 for complete how-to).

Talented Creator. Skilled Hobbyist.
BUSINESS OWNER.

You're already two. With Guardsman WoodPro®, you can become all three!

Guardsman WoodPro is a network of franchises specializing in furniture-related services. Guardsman WoodPro has available territories throughout North America, so call us today.

TRAINING AND SUPPORT PROGRAMS:

- Comprehensive initial training
- Ongoing regional workshops
- Web-based support programs
- 24-hour technical assistance
- Access to fellow WoodPro franchisees

GUARDSMAN WOODPRO CUSTOMERS:

- Homeowners
- Furniture retailers
- Restaurants and Hotels
- Professional office buildings
- Moving and storage companies

NOT TO MENTION:

- Protected territories
- Affiliation with the most established and respected name and presence in the marketplace
- The support of a \$2.2 billion company, and the largest manufacturer of furniture finishes in the world.
- Affordable franchise entry fees, as low as \$9,500
- Home based with low overhead!

*Profit
Centers*



Furniture Repair - gouges, scratches, burns, water marks, dents and more



Structural Repairs - chair regluing, frame repairs and more



Upholstery Services - panel replacement, seat re-upholstering, spot cleaning



Cabinet Refurbishing - cleaning, degreasing, repairing and polishing



Refinishing - complete stripping and refinishing using an eco-friendly, water-based system



For a Franchise Information Kit Call

800.496.6377

www.guardsmanwoodpro.com.


**GUARDSMAN
WOODPRO®**

The most trusted name in furniture repair™

The Way Wood Works

Fig. A Harvesting Oak Veneers

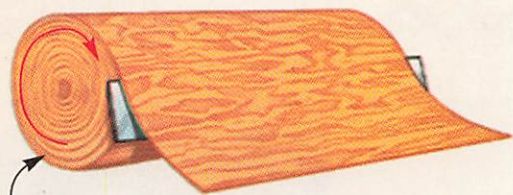Veneer for oak plywood is either peeled from the log, like paper towels from a roll (rotary-cut) or sliced, like cheese from a block (plain-sliced).



GROWTH RINGS

Rotary-Cut

Rotary cutting produces a continuous ribbon of veneer that has a different-looking figure, because the cut is virtually parallel to the growth rings.



Plain-Sliced

Plain-sliced veneers are cut the same way as solid-oak boards, across the log's growth rings.

(continued from page 36)

Another reason to focus on rotary-cut oak ply is that the difference between it and plain-sliced isn't as distinctive as it used to be. Today's smaller veneer logs yield less good-looking plain-sliced veneer. It's common for sheets of plain-sliced oak ply to contain narrow veneers with numerous splices and unbalanced figure patterns that don't bookmatch well.

Conversely, rotary-cut ply often looks better when it's made up of narrow pieces. Today's rotary-cut oak ply sometimes looks *better* than its more expensive plain-sliced cousin! One variation of rotary cutting being used more frequently results in figure that more closely resembles plain-sliced. For "half-round slicing," the log is mounted off-center so only a portion engages the knife on each rotation.

It's hard to find "perfect-looking" plain-sliced oak plywood, due to today's smaller veneer logs.

2004 SuperGrind



The sharpening system that can grind, sharpen, hone and polish most wood working edge tools to a finish that would make an old fashioned barber proud.

NEW INFORMATION VIDEO



This new 23 min. video introduces the TORMEK method for grinding, sharpening and honing edge tools.

Ideal for potential new owners who wish to preview the TORMEK System and for existing owners to see the latest applications

TORMEK®

SuperGrind

The only complete water cooled sharpening system.

*Denotes included as standard with SuperGrind machine.



SVH-60
Straight Edge Jig
For plane irons, wood chisels and spoke shave blades.




WM-200
Pro AngleMaster For setting and measuring any edge angle from 15° to 75°. For any stone dia. from Ø10" to Ø6".



HB-10
Handbook
Water cooled grinding and sharpening of edge tools.



PA-70
Honing Compound
For the Leather Honing Wheels.



ADV-50D
Diamond Stone Truing Tool
Trues the stone exactly round and flat.




SVS-50
Multi Jig For carving & turning skew chisels with a straight or curved edge plus parting or beading tools & roughing gouges.



SVH-320
Planer/Jointer Blade Jig
For HSS blades of any length. Min width 1/2".



SVX-150
Scissors Jig
For all sizes of scissors. Also for shears.



XB-100
Horizontal Base
For grinding away from the edge. Ideal for turners and woodcarvers.



SP-650
Stone Grader
For grading the SuperGrind stone to a finer grit. Also for renewing a glazed stone.



SVD-180
Universal Gouge Jig
For fingernail shaped turning gouges. Carving gouges and V tools. Max. width 1".



SVM-45
Knife Jig For most knives. Min. blade length 2 1/2". Portable electric hand planer blades. Carvers draw knives.



SVA-170
Axe Jig
For carving and carpenter's axes. Max. axe head size 6 1/2".



MH-380
Machine Cover
For protecting the machine from wood dust.



LA-100
Profiled Leather Honing Wheel
For inside honing and polishing of gouges and V tools.



SVD-110
Tool Rest with TORLOCK
For turning scrapers. Carving scrapers and shavers. Screw drivers.



SVM-100
Long Knife Jig
For long and thin knives. Stabilizes a thin blade. Min. blade length 4 1/2".

Call now for brochure and nearest stockist

| | | |
|------------------|--------------------|---------------------|
| Australia | PROMAC PTY LTD | 07-3279-4811 |
| Canada (English) | ADVANCED MACHINERY | 1-877-2-TORMEK |
| (French) | LANGVIN & FOREST | 1-800-889-2060 |
| Ireland | BRIMARC ASSOCIATES | INT +44-1926-493389 |
| New Zealand | W & R JACK | 03-546-7479 |
| South Africa | RECORD TOOLS | 011-422-2340 |
| United Kingdom | BRIMARC ASSOCIATES | 01926 493389 |
| United States | TORMEK USA | 1-800-5-TORMEK |
| Other Countries | TORMEK SWEDEN | INT +46-581-14790 |

4-WAY MONEY-MAKER!



● Planes ● Sands
● Molds ● Saws

Turn a \$5.00 rough board into \$75.00 worth of finished trim in just minutes! Make over 350 standard moldings, tongue & groove, picture frame stock, any custom design. QUICKLY CONVERTS from Planer/Molder to Drum Sander or power-feed Multi-Blade Rip Saw! Made in U.S.A. 5-Year Warranty. Choose from 12", 18" or 25" models.

Variable Feed Makes The Difference!

Just a twist of the dial adjusts the Woodmaster from 70 to over 1,000 cuts per inch.

Produces a glass-smooth finish on tricky grain patterns no other planer can handle. Plenty of

American-made "muscle" to handle money-saving, "straight-from-the-sawmill" lumber.

**FREE
30-DAY TRIAL!**

Best Value - "After checking them all, Woodmaster was obviously the best deal for the money. Also I would like to acknowledge the polite and prompt service."

E. D. Holtz, North Carolina

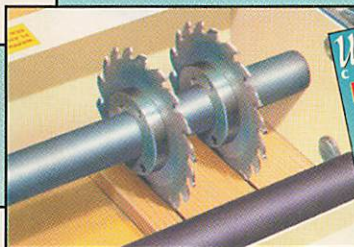
Runaway Hobby - "Thanks to Woodmaster, what started as a hobby is now a full-time millwork business."

D. A. Probst, Pennsylvania




Woodmaster's Quick-Change Molding Head lets you create custom moldings from any stock. Choose from over 350 standard trim and picture frame patterns...or design your own!

New rip saw attachment lets you gang-rip with power feed in a fraction of the time it takes for separate hand-fed passes on an ordinary table saw.



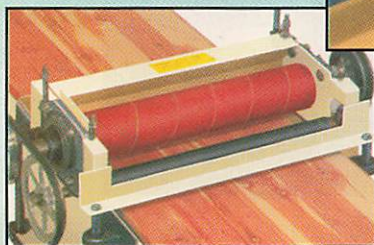Power-fed sanding speeds production and improves the quality of your work. No more waves or cross-grain scratches.



**350+
PATTERNS!**

**Call Today
For FREE FACTS!
1-800-821-6651**

Ask for Extension PY67

☐ **YES!** Rush my **FREE** Information Kit!
Woodmaster Tools, Dept. PY67
1431 N. Topping Avenue Kansas City, MO 64120

NAME _____

ADDRESS _____

CITY _____

STATE _____ ZIP _____



The Way Wood Works

Tips for Choosing Oak Plywood

- Ask for permission to look through the stack before you start. Some hardwood lumberyards won't allow it.
- Take a friend along to help you look through the sheets. Practice a scout's etiquette and leave the stack neater than you found it.
- Look for sheets that most resemble solid boards. Choose vertical grain patterns and stay away from wide, flat ones.
- Expect to see unappealing sheets mixed in with the good-looking ones. These sheets are perfectly good for parts that won't show.
- Be aware that sheets are usually stacked with the face veneers in sequence. Appearance may improve (or deteriorate) slightly with each sheet. If your project requires multiple sheets, sequential faces ensure color and grain matches.
- Be sure to look at the back of each sheet. Even though it's graded lower, it may *look* better than the front.
- If you don't see the good-looking material your project deserves, come back in a week and look again. There's likely to be a fresh supply of plywood to look through.

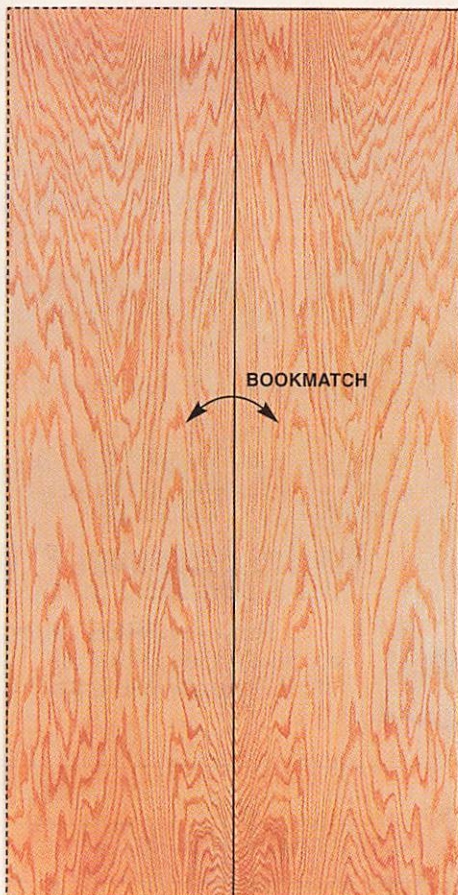
*When you shop for oak plywood,
don't settle for what's on top of the stack.*

THE CLASSIC APPEARANCES OF ROTARY-CUT AND PLAIN-SLICED OAK PLYWOOD


Rotary-cut figure is jagged and often wild looking. Plain-sliced veneer is more orderly, with the familiar cathedral and oval patterns that resemble edge-glued boards. Repeating patterns are visible in both sheets because the veneers are

bookmatched and spliced together. It's not unusual for plain-sliced sheets to be made up of eight or more pieces. Rotary-cut veneer pieces may be wider, but sheets almost always contain splices.

ROTARY-CUT



PLAIN-SLICED

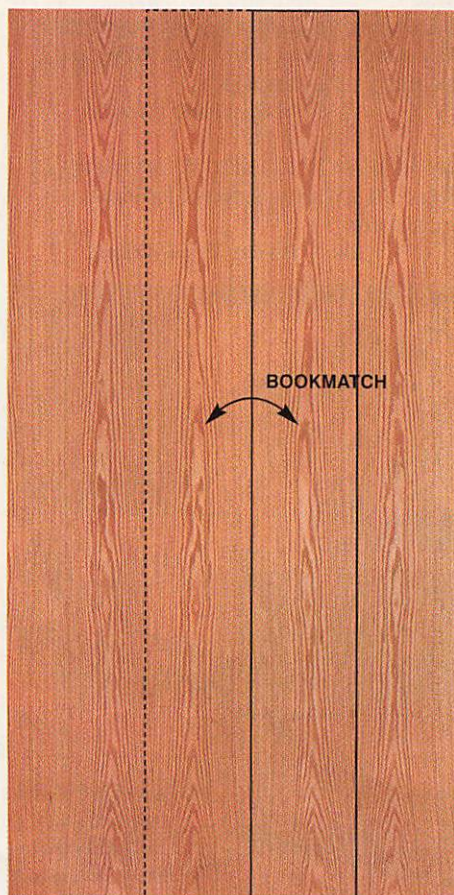

Sand, cat-hairs, dust and dust-mites... Nothing gets by the 8-lb. ORECK XL®!

The favorite vacuum of thousands of hotels and over 1 million home users. Now you can use this powerful vacuum to clean your home better than ever.

Exclusive Filtration System assures hypo-allergenic cleaning.

Ideal for those who suffer from dust-related or allergic discomforts. There's virtually no after dust. Its ingenious top-fill action carries the litter up through the handle and deposits it on the inside top of the bag. Yesterday's dirt can't seep out. And the metal tube top-fill performance works without hoses to crack, leak or break.

Among the lightest full-size vacuums available.

It weighs just 8 pounds. So stairs are a snap. It's super-powerful, with amazing cleaning power: the fast, double helical brushes revolve at an incredible 6,500 times a minute.

ORECK's Helping Hand® handle is orthopedically designed on the principles of

ergonomics. No need to squeeze your hand or bend your wrist. A godsend for people with hand or wrist problems.

Exclusive Microsweep® super-cleans bare floors without any hoses, attachments or adjustments.

A full 10-year Guarantee against breakage or burnout of the housing PLUS a full 3-year Warranty on the Xtended Life motor. Try the ORECK XL in your home for 30 days Free. If you don't love it, you don't keep it.

FREE FOR TRYING Cordless Speed Iron™

Yours to keep just for trying the ORECK XL no matter what you decide.



30-DAY
FREE
HOME
TRIAL



FREE
FOR
BUYING

Super Compact Canister

Yours Free when you purchase an ORECK XL Upright.



Great for all above-the-floor cleaning. The 5-lb. dynamo seen on TV. Strong Enough To Pick Up A 16-lb. Bowling Ball™! Hand-holdable and comfortable with 8 accessories. Yours FREE when you purchase an ORECK XL upright.

Call toll-free 1-800-471-1891 Ext. BK444
or visit oreck.com

Or mail in this coupon today. No salesperson will visit.

- ☐ Yes, please call me to arrange a free 30-day home trial of the new Oreck XL and send me a free Oreck Cordless Speed Iron just for taking the Oreck Challenge. I understand I will receive the Super Compact Canister free with purchase.
- ☐ Please send me a free information kit on the amazing ORECK XL.
- ☐ Also include details of ORECK's 12-month Payment Plan.

Name ☐ Mr. ☐ Mrs.

Address _____

City _____ State _____ Zip _____

Telephone (_____) _____
area code

Nothing gets by an
ORECK®

PN02R Oreck Direct, LLC, 100 Plantation Road, New Orleans, LA 70123

BK444

The Way Wood Works

LOTS OF VERTICAL GRAIN can make rotary-cut oak plywood look just as good as plain-sliced oak ply. Look for tight grain, consistent figure and tall graceful cathedral patterns.


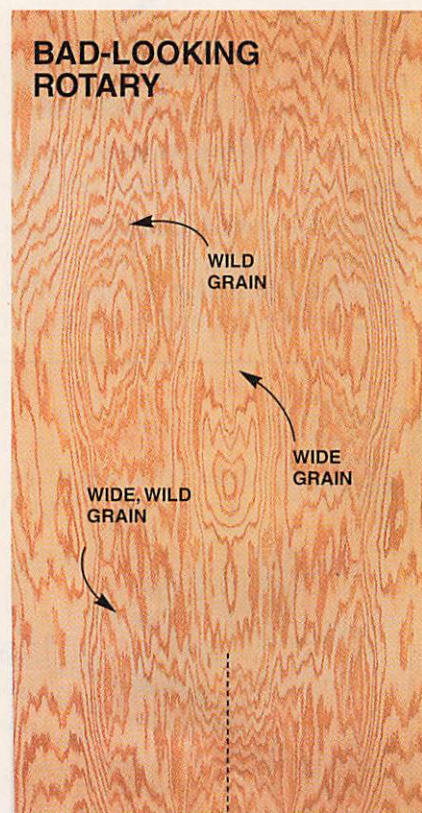
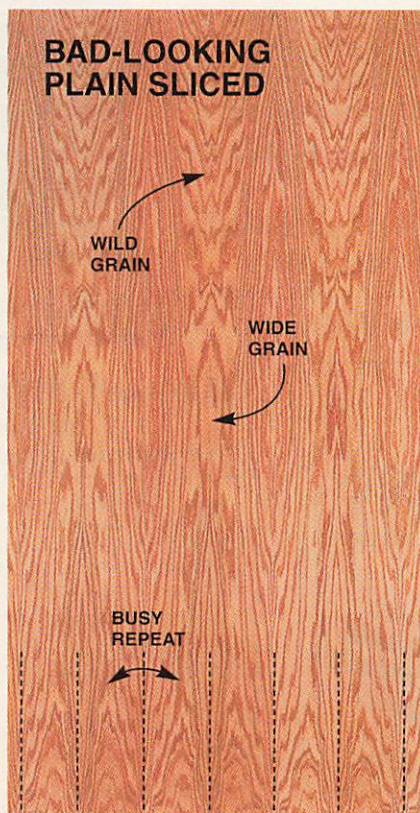
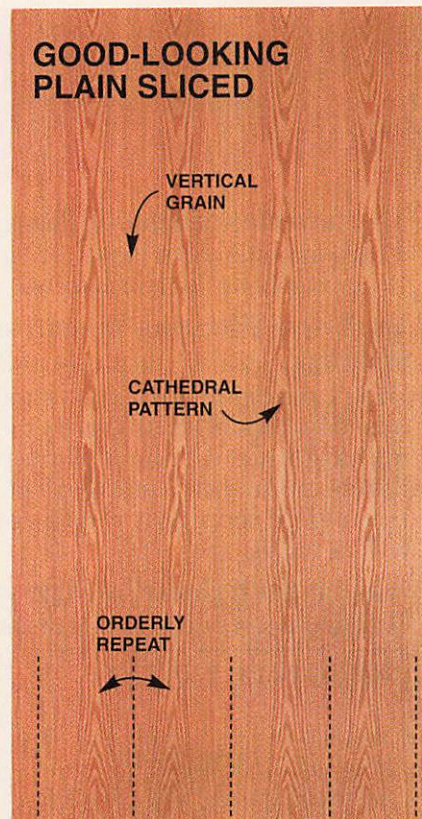
Vertical Grain Looks Best

Figure patterns for both rotary-cut and plain-sliced veneers vary widely, depending on the orientation of the knife to the log. If the knife cuts parallel to the growth rings, unattractive wide, flat patterns are the result. These patterns are more common and more pronounced in rotary-cut veneers than plain-sliced. In the worst case, rotary-cut oak plywood resembles fir ply (lower right), and plain-sliced oak ply looks like it was rotary cut (lower left).

Often enough, the rotary knife cuts across the log's growth rings at almost the same angle as a plain-slicing knife. This rotary-cut veneer is likely to contain vertical grain and a more natural (plain-sliced) appearance (upper left). Over an 8-ft. length, plain-sliced cathedral patterns frequently become wide and unattractive (lower left).

Rotary-cut oak plywood can look just as good as plain-sliced!

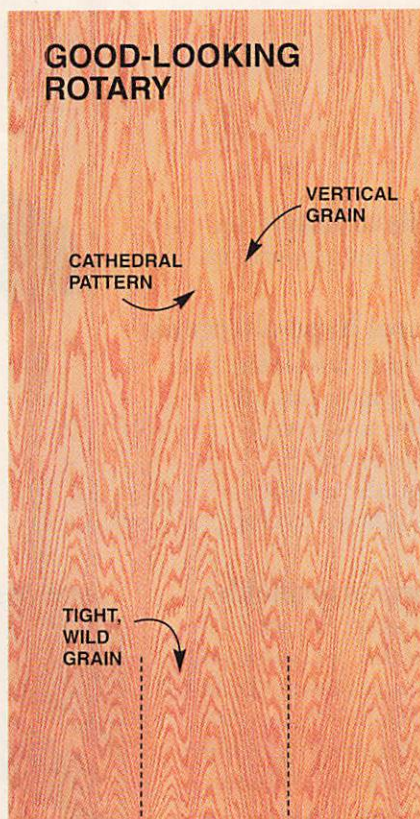WIDE, FLAT GRAIN and jagged, wild grain spoil the appearance of both rotary-cut and plain-sliced oak plywood. Grain that's wide *and* wild looks worst of all.



Create the classic beauty of RAISED PANEL DOORS...

with a 1/4" or 1/2" Router, and 1/2" or 3/4" Shaper.

Plus make many other types of doors and projects with Raised Panel Door Sets:


- Flat Panel Doors • Kitchen Cabinet Doors • Cathedral Doors
- Glass Doors • Wainscoting • Entertainment Center Doors

It's easy and inexpensive with professional production quality MLCS carbide tipped door sets! Sets include Combination Rail and Stile bit, and Raised Panel bit. For instructions, tips and techniques, ask for our FREE manual, item #9069.

Raised Panel Door Sets *Ball bearing included

| SET # | BIT STYLE | LARGE DIA. | PRICE |
|-------|--------------------|------------|---------|
| #1301 | 1/4" Shank Router | *2" | \$69.95 |
| #1302 | 1/2" Shank Router | *3-1/2" | \$79.95 |
| #1303 | 1/2" & 3/4" Shaper | 4-5/8" | \$99.95 |

#1438 Raised Panel Door Instructional VideoSALE \$9.95

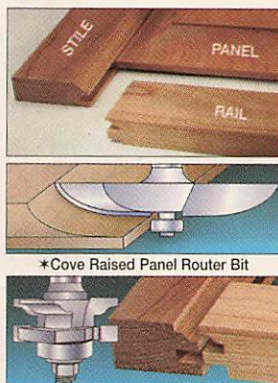

*Cove Raised Panel Router Bit

*Ogee Combination Rail & Stile Bit



15 Piece Router Bit Set

MLCS Anniversary Set at a once-in-a-lifetime price!

Featuring these carbide tipped bits:

- 4 Straight (3/16", 1/4", 1/2", 3/4"), 1 Cove (1/2")
- 1 Round Over (3/8"), 1 Roman Ogee (5/32")
- 1 14° Dovetail (1/2"), 1 V-Groove (3/8")
- 1 Hinge Mortising (1/2"), 1 Panel Pilot (1/4")
- 1 45° Chamfer, 1 Flush Trim (1/2"), 1 Rabbeting (3/8"),
- 1 Round Nose (1/4"), one Allen Wrench and one bearing to convert Round Over bit into Beading bit.

#1442 1/4" SHANK • #1443 1/2" SHANKSALE \$39.95 WOOD STORAGE BOX INCLUDED

30 Piece Router Bit Set

An amazing price for our most complete set!

Featuring these carbide tipped bits:

- 3 Cove (1/4", 3/8", 1/2"), 2 Flush Trim (3/8", 1/2")
- 3 Dovetail (14°-1/2", 5/8" & 9°-3/8"), 1 45° Chamfer,
- 6 Round Over (1/8", 3/16", 1/4", 5/16", 3/8", 1/2")
- 5 Straight (1/4", 5/16", 3/8", 1/2", 3/4")
- 2 Roman Ogee (5/32", 1/4"), 1 Rabbeting (3/8")
- 3 Round Nose (1/4", 3/8", 1/2"), 1 Bevel (25°)
- 1 Slot Cutter (1/4"), 1 V-Groove (1/2")
- 1 Panel Pilot (3/8"), 1 Allen Wrench and one bearing to convert Round Over bit into Beading bit.

#1444 1/4" SHANK • #1445 1/2" SHANKSALE \$99.95 WOOD STORAGE BOX INCLUDED

16 pc. Forstner Bit Set

High Quality Steel For Heavy Use

Sizes: 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2", 2-1/8".



WOOD STORAGE BOX INCLUDED

#1418 REG. \$141.20SALE \$43.95

Biscuit Joining Set


5/32" slot cutter router bit and 250 #20 biscuits. For our FREE instruction manual, order item #9069.



#1385 1/4" SHANK • #1386 1/2" SHANK
REGULAR PRICE \$35SALE \$29.95

Carbide Tipped Router Bits

- 1 OGEE RAISED PANEL
#1423 2" Large Dia.\$29.95
- 2 TONGUE AND GROOVE
#1333 Straight\$29.00
#1335 Wedge\$29.00
- 3 LOCK MITRE BIT 2" Dia.
#1433 for 1/2"-3/4" stock ..\$37.50
- 4 SOLID CARBIDE UPCUT AND DOWNCUT SET
#1437 1/4" dia., 3/4" cutting length
Special Set Price.....\$19.95



NEW Merle Clamp jaws pivot to any angle!

New flexible jaw inserts are made of non-marring high impact ABS plastic and are easily removed. The NEW dual pivot feature allows the Merle to clamp virtually any size or shape securely! 23 ft. of steel banding included.

- Clamp circles, ovals, rectangles, and with additional corners (see below) 5, 6, 7, 8 or more sides.
- Clamp drawers, doors, picture frames, cabinets, etc. Holds firmly in square.
- Adjustable, uniform clamping pressure on all sides
- Durable cast aluminum and steel construction
- Clamp from 2-5/8" x 2-5/8" to 69" x 69", or 23" around. Extend to any length by using standard 3/8" steel banding or strapping.

Merle Clamp and 23 ft. of banding
#1439SALE \$26.95
*4 Additional Aluminum Corners and Jaw Inserts
#1440 SET OF 4SALE \$14.95

| WOOD Product Scorecard | |
|--|-------|
| Merle Clamp-Editors Choice, Winter '97 | ★★★★★ |
| Value | ★★★★★ |



Shipping
is FREE!

IN CONTIGUOUS USA
FOR ALL ITEMS



ORDER BY CREDIT CARD OR CHECK:
MLCS, P.O. Box 4053AN
Rydal, PA 19046

1-800-533-9298 • mlcswoodworking.com

MLCS

ROUTER BITS AND PROFESSIONAL WOODWORKING PRODUCTS

Call for a FREE CATALOG • Questions? Call for TECHNICAL HELP

The MLCS
E-Store
Is Now
OPEN!

mlcswoodworking.com

Order on the Web

©2000

CRAFTSMAN

**AWESOME DRILLING
POWER YOU CAN
DRIVE ANYWHERE**



Simply turn the collar to adjust torque from 150 to 550-in. lbs. The 24-position adjustable clutch lets you perform a full range of tasks, from drilling into hard masonry to precise driving into soft woods.



2-speed gearbox lets you effectively work at both high & low speeds. Work in the low ranges for higher torque. Switch over to a high range for fast drilling in a variety of materials.



Designed to keep you in complete control as you work Mid-handle design provides balance and control. Overmolded handle improves grip & minimizes slippage.



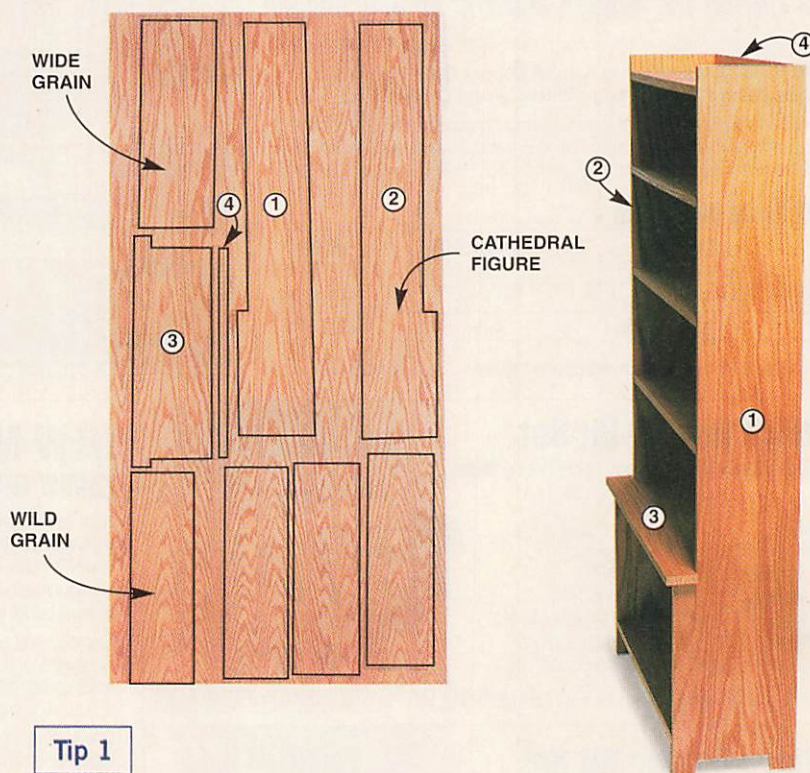
Just to show off its versatility, we've included a 30-pc. drill accessory kit It features drill bits, screwdriver bits, spade bits and even masonry bits, all organized in one deluxe fitted case.

Available at Sears, Sears Hardware, and the Craftsman Catalog at 800-437-9686

SEARS
THE GOOD LIFE
AT A GREAT PRICE
GUARANTEEDSM

The Way Wood Works

FOUR TIPS THAT MAKE OAK PLYWOOD LOOK GREAT




Tip 1

CONSIDER FIGURE PATTERNS DURING LAYOUT.

On some projects, like the small bookcase pictured here, it's possible to cut your plywood for appearance rather than economy. In general, cathedral figure looks the most like solid lumber and edges look best with the grain running parallel. Choose the best-looking figure for visually prominent pieces and locate them first (numbers 1 through 4, above). Hide less attractive figure by using it on pieces where it won't show. Cut the pieces oversize with a circular saw or jigsaw before trimming them to final dimensions.

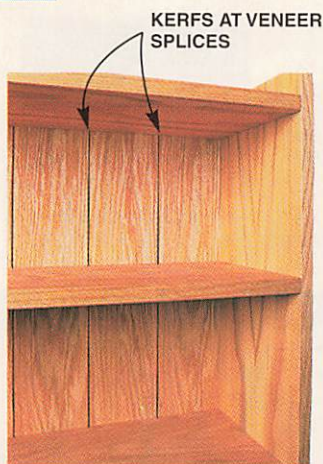Tip 2



IMITATE A SOLID-WOOD BACK.

Cut kerfs in oak plywood so it looks like individual boards. A thin kerf blade works best. Position the kerfs at veneer splices, so the breaks look natural.

Here's how to make the kerfs stand out: Seal the plywood with a coat of clear finish before you make the cuts. Stain will darken the raw-wood kerfs, but not the neighboring sealed surfaces.

GO FROM HARD-NOSE DRILLING TO SOFT-TOUCH DRIVING AT THE TURN OF A DIAL

INTRODUCING THE WORLD'S 1ST CRAFTSMAN® CORDED DRILL WITH ADJUSTABLE TORQUE!

At last...the best of both worlds have been combined in the new Craftsman 3/8-in. corded drill/driver.

We've combined continuous corded power together with adjustable torque control previously reserved for cordless models. It bursts with 5.5-amps of power to handle your tough, heavy-duty drilling jobs. A 2-speed gear box and 24-position adjustable clutch allow a full range of high and low torque options. Use it to safely sink a drywall screw, then dial up more torque to power drive into masonry.

The 3/8-in. single-sleeve keyless chuck makes bit changes fast & easy...essential for such an innovative drill

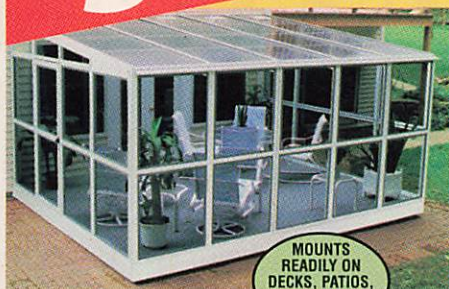
that can do it all so well. Available at your nearest Sears and Sears Hardware store. #27994, **99.99**

CRAFTSMAN

MAKES ANYTHING POSSIBLE™

Price may vary in Alaska, Hawaii & Puerto Rico.
Shipping, handling & sales tax charges on phone orders
will be quoted over phone. © 2001 Sears, Roebuck and Co.

ENERGY- SAVING SUNPORCH® CONVERTIBLE SUNSPACE®



MOUNTS
READILY ON
DECKS, PATIOS,
OR LANDSCAPE
TIES.

INSULATED WINTER SUNROOM CONVERTS TO A SUMMER SCREEN ROOM!

Full Top-To-Bottom Wall Area Screens!

☐ QWIK® window/screen change system ☐ Do-it-yourself kit, no contractors needed ☐ Meets building codes for snow & wind loads ☐ Unique Climate Control System ☐ No extras, comes complete ☐ Buy factory direct & save ☐ America's #1 value since 1974.

FOR MORE INFO & BONUS OFFER:

MAIL
COUPON
WITH \$2.

WEB SITE

www.sunporch.com
(Bonus Code: AMW)



SunPorch® Structures, Inc.
P.O. Box 368, Dept. AMW
Westport, CT 06881-0368

SunPorch® Structures, Inc.
P.O. Box 368, Dept. AMW
Westport, CT 06881-0368

☐ **YES** I enclose \$2. Please send complete details, Color Catalog & Prices.

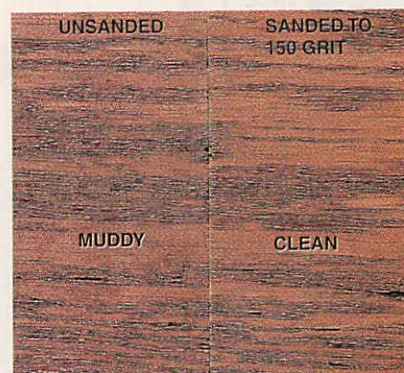
Name _____

Address _____

City _____

State _____ Zip _____


The Way Wood Works



Tip 3

SAND BEFORE YOU STAIN.

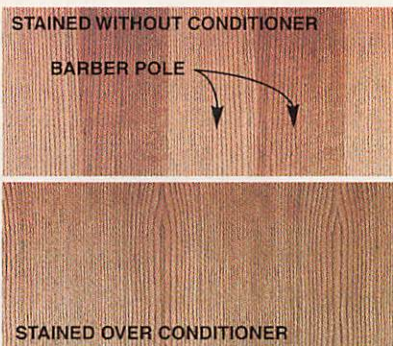Oak plywood is machine-sanded at the factory, but it'll look muddy if you stain it without further sanding. When you sand, you'll get the best results by using a block to distribute pressure evenly. Oak veneer isn't consistently hard (the latewood is harder than the earlywood), so fingertip sanding can result in an uneven, wavy appearance. Before using a water-based stain, sand once, then raise the grain by moistening the surface with a damp sponge, and sand lightly again.



Tip 4

AVOID "BARBER POLE" stripes

by using a wood conditioner or sealer before staining. Barber pole is most noticeable on plain-sliced figure, but it occurs whenever veneers are bookmatched. Veneers have one "tight" face and one "loose" face as a result of the slicing process. Tiny fractures occur on the loose face as it curls away from the knife. These fractures cause the loose face to absorb more stain. Bookmatching puts tight and loose faces side by side, and staining results in noticeable stripes. Conditioners and sealers saturate the surface of the wood so the stain is absorbed evenly. But because these products don't allow as much stain to be absorbed, a second coat of stain may be necessary to reach the desired color. **AW**



PASSION IS NOT DISPOSABLE



Nothing says devotion like a Zippo. To find one that lights the fire in you, visit or call Shepherd Hills Cutlery at 1 800-727-4643.

zippo

Lighter courtesy of the Zippo archives. Zippo. It works or we fix it free™. Made in USA. zippo.com

FOR REAL

He wants to live the life of his dreams...



So why is Hank Hastor squandering away a third of his life...in a nightmare bed?

*How about your bed?
And your life? Maybe it's
time for a change...*

Why not let Tempur-Pedic's Weightless Sleep System™ energize your body, lift your spirit, change your life?

You have a nice home...drive a fine car...enjoy the good things of life. But you're *still* sleeping on an uncomfortable *outmoded* bed.

That's where *we* come in...

Seven years ago, we brought the famous Tempur-Pedic SWEDISH SLEEP SYSTEM to America. Since then, millions have discovered our new

fatigue-fighting, energy-elevating *weightless sleep* phenomenon.

- A marvel of molecular physics!
- Drastically cuts tossing & turning.
- No air, water, or steel springs.
- Adjusts its shape automatically.
- Only one moving part—you.

We expanded NASA's anti-G-force research to invent a new weightless-sleep material. Our technology is recognized by NASA, the U.S. Space

Foundation—and certified by the Space Awareness Alliance.

Other beds are fancy on the outside. Ours is a *miracle* on the inside—where billions of self-ventilating viscoelastic microcells cuddle your body with *perfect* support!

Thousands of sleep clinics and health professionals recommend us. TV, radio, magazines, newspapers give us rave reviews!

Call or fax right now for a free sample, free video, and free information. We'll also send you a **FREE HOME TRYOUT CERTIFICATE**.

**FREE DEMONSTRATION KIT
is now yours for the asking!**

***Makes all other
beds obsolete!***



*Our advanced technology is recognized
by NASA, the U.S. Space Foundation, and
certified by the Space Awareness Alliance.*



TEMPUR-PEDIC
PRESSURE RELIEVING
SWEDISH MATTRESS AND PILLOW

FREE SAMPLE / FREE VIDEO / FREE INFO

1-800-769-6101

OR SEND FAX TO 1-859-259-9843

Tempur-Pedic, Inc., 1713 Jaggie Fox Way, Lexington, KY 40511

By Dave Munkittrick

Tips
for
Better

Picture Frames


Frame like a pro
with simple tools.

ART DIRECTION: PATRICK HUNTER • PHOTOGRAPHY: MIKE HABERMANN • ILLUSTRATION: DON RAYMOND


Blind Splines

Until somebody discovers a miracle glue for end grain, miter joints will need reinforcement. Nails work, but pounding them in delicate frame material can be risky. Blind splines offer invisible reinforcement without nails.

Cut the slots on a router table using a guide board and a 1/8-in. slot cutter. Each piece is cut face up (mark the faces as a reminder). Feed the stock from the right for one cut and from the left for the second cut.




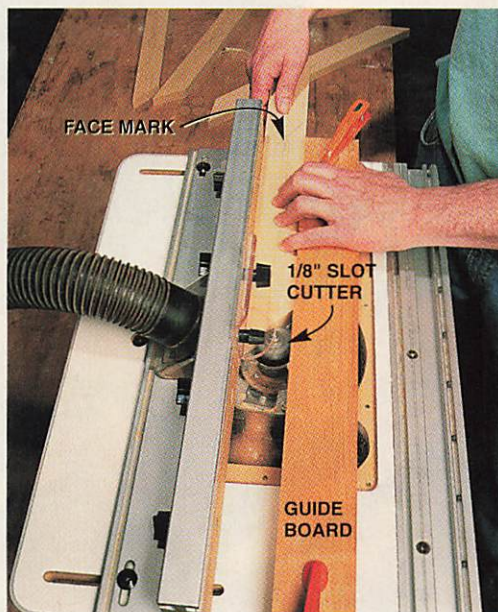Cut the splines from a strip of hardwood with a 1-in. plug cutter and orient the grain perpendicular to the joint for strength.




No-Mar Wire Hangers

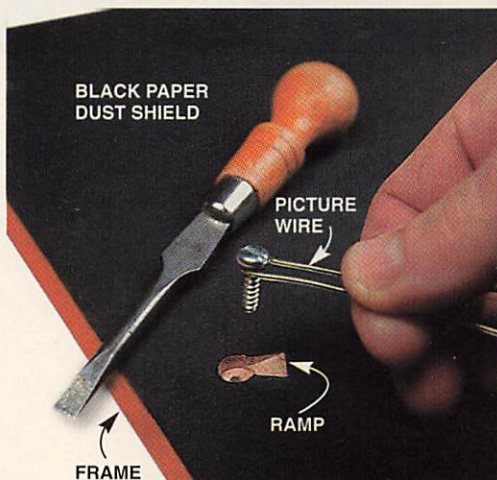Did you ever take down a picture only to find that the hangers have left some nasty scratches on the wall? For a frame that hugs the wall without marring it, try this flush-mount system. Countersink screws into the frame and chisel a ramp out of the hole to avoid kinking the wire. Add bumpers to the lower back of the frame for additional wall protection.



Fingertip Test

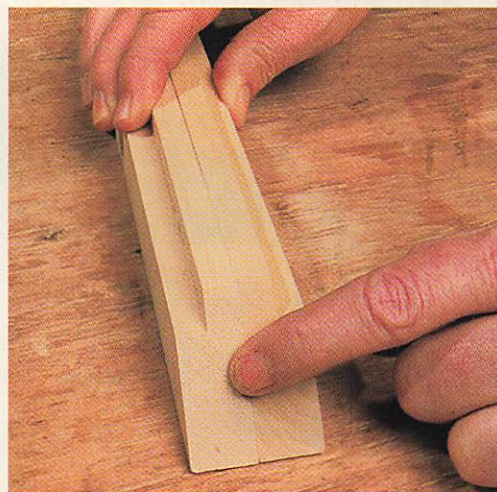To get a mitered frame to come together perfectly two things must happen: 1. the top and bottom must be exactly equal in length; and 2. the two sides must be exactly equal in length. It's natural to want to grab a tape measure to verify these lengths, but forget it. When it comes to checking frame parts for equal length, no tool can come close to your fingertips. Pair up the frame pieces back to back and *feel* for any ridge where the miters line up. Your fingertip will detect differences smaller than the eye can see or your tape measure can measure.





Picture Frames



FIG. A Spline Slot Sled

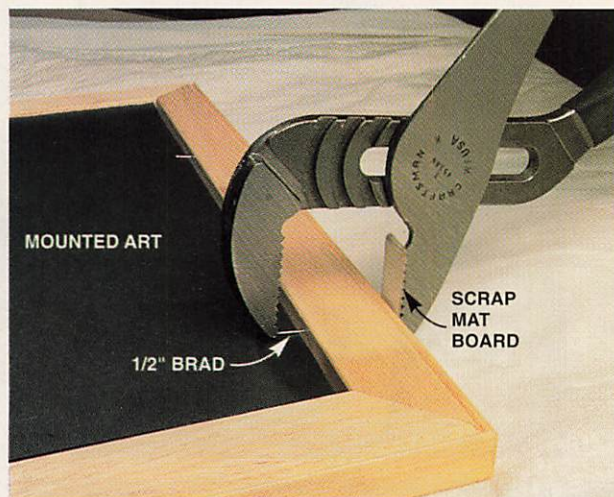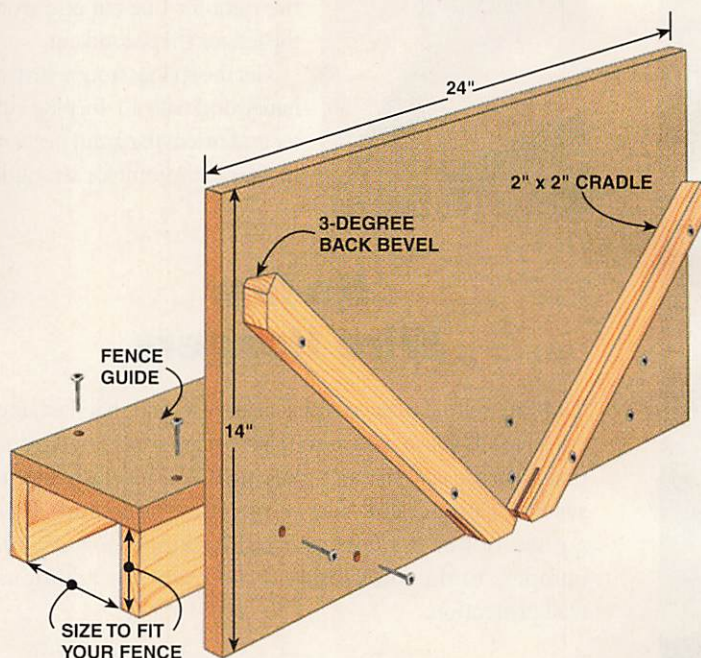Build the U-shaped guide to fit snugly over your table saw fence. Two 2x2 strips are screwed to a 14 in. x 24-in. piece of MDF to form the cradle. A 3-degree bevel on the inside edge of the cradle helps to hold the frame stock securely.



Spline Sled

Through-splines are a great way to reinforce miters. They also add a snappy decorative element to any picture frame.

A through-spline is a thin piece of wood that's glued into a slot cut across a miter joint. The spline can be made from contrasting wood for an accent or from the same species for a more subdued effect. Cut and sand the spline flush with the frame edges after the glue has set.

We built this nifty sled for safely cutting the slots for the splines. The picture frame is held in a cradle as the sled rides on your table saw fence.

Easy Brad Pusher

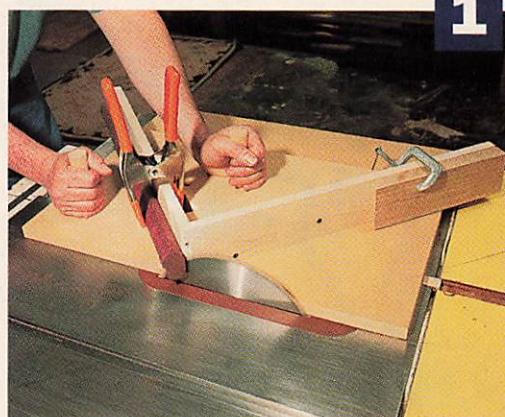
One-half-inch brads are ideal for securing mounted artwork and glass in a frame. But, the awkward angle and potential for damage rule out using a hammer. You could go out and buy a brad pusher (a specialized tool used by the pros), but why spend the money? For a handy, shop-made brad pusher just modify a pair of adjustable pliers. Stick a scrap of mat board on the bottom jaw with some double-faced tape to protect the frame. Simple and cheap.

Picture-Perfect Frame Miters


Few things are more frustrating than trying to get good-looking miter joints on all four corners of a picture frame. Three requirements guarantee success: the miters must be right on 45-degrees, the two sides must be exactly equal in length and the top and bottom must be exactly equal in length.

Our miter sled ensures you'll meet all these requirements. It also offers repeatability which allows you to quickly cut consistent parts for multiple frames. If you've struggled with making a crosscut sled for your saw, relax. This sled is a cinch to build. Before you start, check your tablesaw to make sure the fence and blade are parallel to the miter slot and the blade is 90 degrees to the table. Then follow these steps:

1. Cut a 1/2-in.-thick hardwood runner so it slides in your miter slot without slop.
2. Run a 1/4-in.-deep dado in the bottom of the base. Position the dado so the edge of the base overhangs the saw's line of cut.
3. Glue or screw the runner in place.
4. Once the glue is dry, set the base in the miter slot and trim the overhanging edge. Use the same blade you intend to use for cutting miters. We recommend a high tooth count cross-cut blade.
5. Cut a triangular fence support. It's essential that the apex of the triangle be a perfect 90-degrees.
6. Notch the sides of the support for spring clamps.
7. Fasten the fence support to the base using a combination square to establish the 45-degree angle.
8. Add the fence and handles.
9. Finally, make a hardwood stop-block with a 45-degree angle cut on one end.



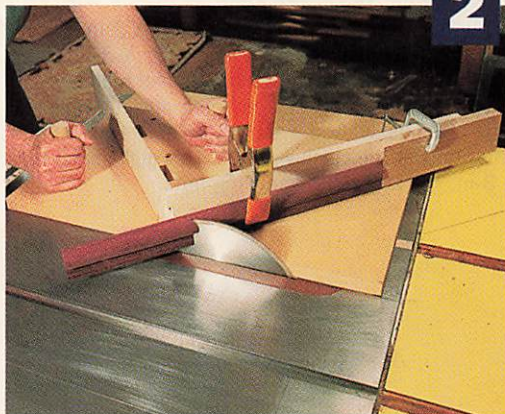Cut the first miter by clamping the stock on the fence that faces the operator.



Cut the second miter on the opposite fence with the newly mitered end locked into the mitered stop block.

FIG. B Perfect Miter Sled

This easy-to-build sled helps cut perfect miters every time.

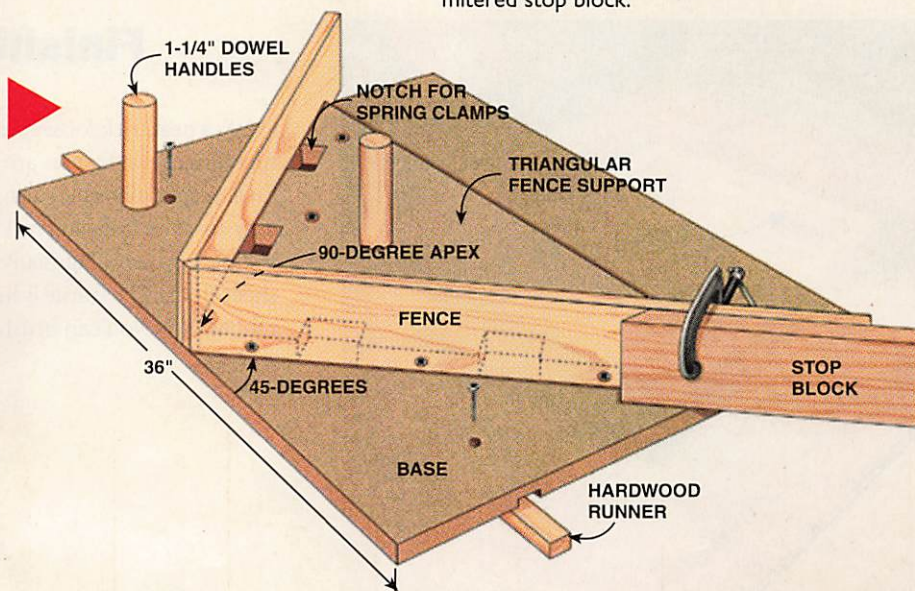



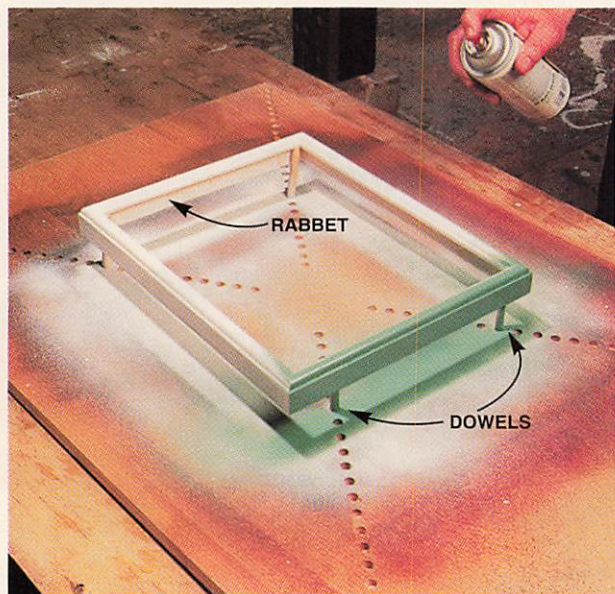


FIG. C Four-Point Frame Clamp

We used hard maple for our clamp, but any hardwood will do. The clamp arms are 1 in. x 2 in. x 30-in. long. The clamp block is 1 in. x 2 in. x 5 in. and the corner blocks are 1 in. x 2 in. x 3-1/2 in. Drill a 5/16-in. hole in the center of the corner blocks and cut a 90-degree notch into the hole with a bandsaw. Add a second hole, 3/4-in. behind the first, for the carriage bolts. Use eight 5/16 in. x 3-in. carriage bolts and wing nuts.

Four-Point Frame Clamp

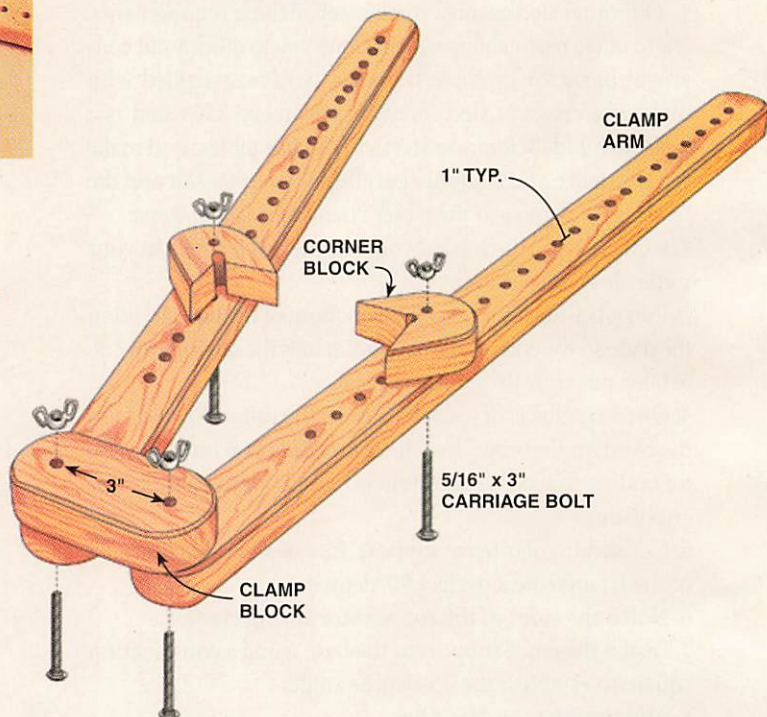This shop-made frame clamp puts equal pressure on all four corners of your frame at once, for quick, hassle-free assembly. Use scraps of paper towel under each joint to absorb glue squeeze out. Set the pivoting corner blocks to fit your frame. Apply enough clamp pressure to hold the frame together but still allow you to align the pieces for a perfect fit. Finally, clamp tight.



Finishing Rack

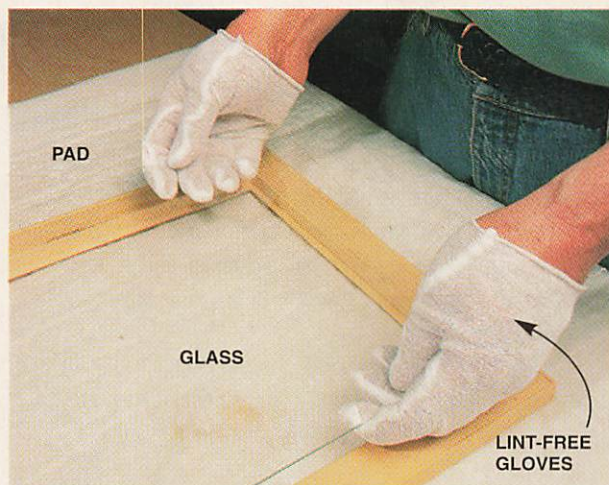
Here's a neat trick for securely supporting picture frames for finishing. Most frames are too light to hold still while you finish, especially when using a brush-on finish. This simple, easy-to-store finishing rack ends the hassles. Dowels are set in holes drilled diagonally from the corners of a piece of sheet stock. The frame is held firmly in the rack by its own rabbet. Now you can brush or spray almost any size frame with ease.

SHOP TIP SPECIAL

Keep It Clean!

It's essential to work in a clean environment during final assembly. Wear a pair of lint-free darkroom gloves (see Sources, page 56) during final assembly to keep fingerprints off the mat and glass. Protect the finished frame with a pad and keep a sharp eye out for dust and debris.

There's nothing more fist-banging maddening than spotting your own eyelash stuck inside the glass after the picture is hung on the wall.




Grocery Bag Dust Shield

Dust and insects have an uncanny knack for finding their way into framed artwork. Professional framers always seal the back of the frame with a paper dust shield. You don't need special paper for this, a plain grocery bag works just fine (for larger frames, use brown kraft-paper available at art supply stores). Run double-faced tape along the inside edge of the frame and press the paper in place to seal the frame.


Tip

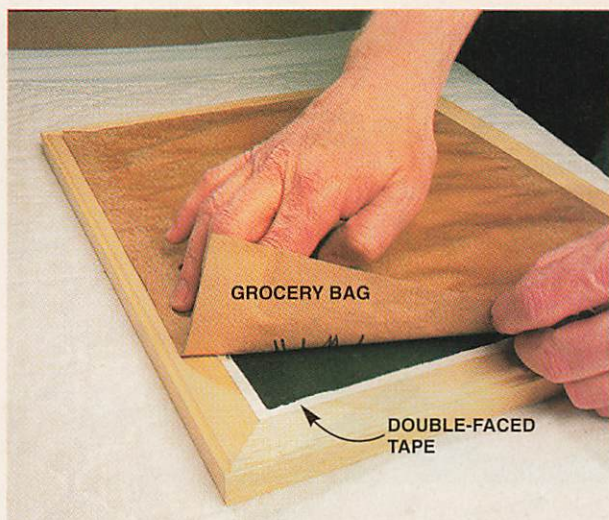For a neater look, dampen the paper with a sponge after taping. The moistened paper will shrink as it dries, leaving a tight, wrinkle-free dust shield to protect your artwork.



Quick-Change Fasteners

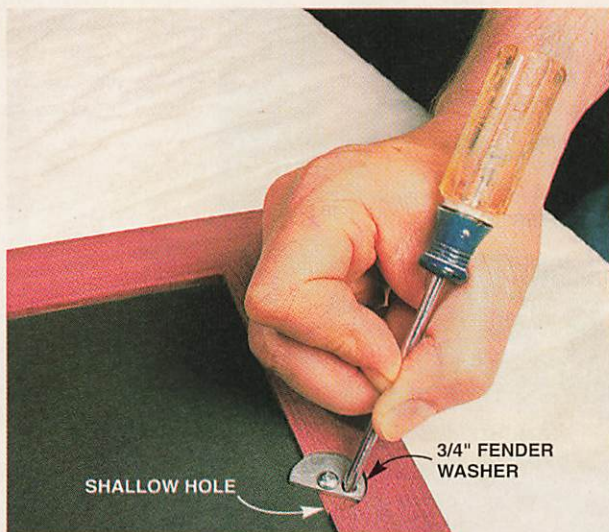For some frames, like those with the kid's school photos, removable backs are the best choice. Here's how to make your own quick-change fasteners: Cut 3/4-in. fender washers almost in half with a hacksaw. Use a Forstner bit to drill shallow holes in the inside edge of the frame. The bottom of the holes should be slightly below the back of the mounting board. A small hole drilled in the washer makes it easy to open and close the fasteners.



Matting and Mounting

Matting

Most artwork looks better when a border of mat board (see Sources, page 56) separates the frame from the picture. Beyond its aesthetic value, the mat also separates the artwork from the glass where condensation can cause damage. Here's a simple step-by-step procedure for cutting the mat opening and mounting the artwork using simple shop-made jigs and tools.

The first step, and probably the one that's most intimidating, is choosing the color and size of the border. Here are a few rules of thumb that should clear things up:

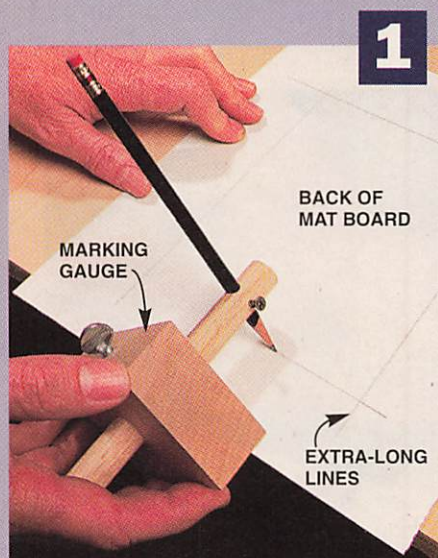
- Choose a mat color that reflects a dominant color in the art.
- Stay away from bold colors that might distract the eye from the art. Off-white is usually a safe choice.
- The border created by the mat opening should be wider than the frame. 2 to 3-in. borders are good for most common sizes.
- Make the bottom border 10 percent wider to visually anchor the artwork in the frame.
- When in doubt, visit a framing store and look at some examples of similar-size artwork for inspiration.

Cutting the Mat


The artwork is typically sandwiched between the mat and a mounting board. A mounting board is nothing more than a solid piece of acid-free mat board or foam-core. Cut the mat and the mounting board to easily fit in the rabbet of the frame. A utility knife and a straightedge will do the trick. Because the cuts are hidden in the rabbet they aren't as critical as the visible cuts made for the mat opening.

Mark the desired opening in the mat (Photo 1). Always lay out the mat border on the backside of the mat and run the lines long on the corners. This makes it easier to see where to stop and start the cut. A marking gauge works great for this: no measuring, no straightedge to follow—just set the gauge to the border width you want and go.

Cutting the mat opening requires a straightedge guide and a cutter that holds the knife at a 45-degree angle (Photo 2). Each cut must be done in one continuous motion. Index marks on the cutter tell you where to start and stop your cut.




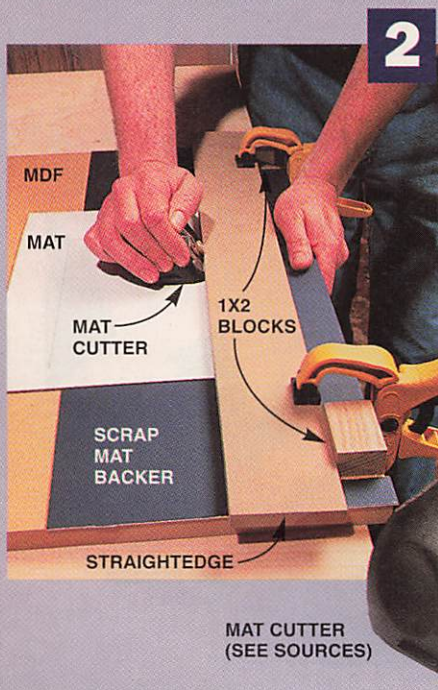1 Lay out the mat opening with a marking gauge. You can easily make your own from a block of wood and some 5/8-in. dowel.



2 Use a mat-cutting jig to cut the opening. This straightforward jig prevents the straightedge from being pushed aside by the cutter while holding the mat secure. The jig is nothing more than a piece of MDF with a couple of 1x2 blocks glued to one edge. A piece of scrap mat board is used as a backer for the knife to cut into.

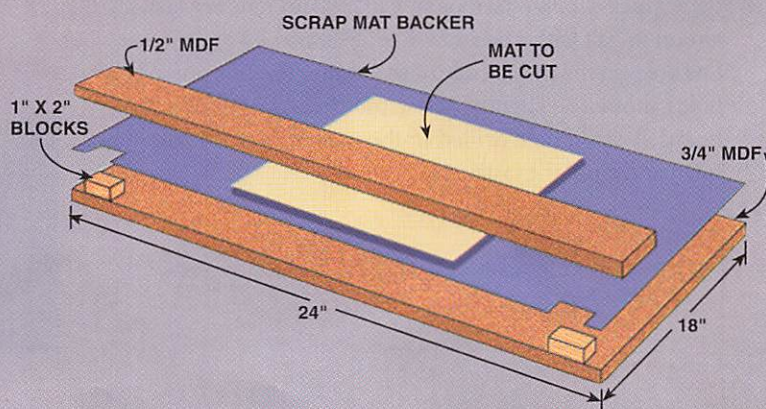FIG. D Mat-Cutting Jig




SHOP TIP SPECIAL

Mounting

Hinge the mat to the mounting board to keep the opening in the mat aligned properly with the artwork (Photo 3). Once the artwork is positioned in the mat opening (Photo 4) it is secured to the mounting board with two T-hinges (Photo 5). The hinges allow the artwork to hang freely on the mounting board, which prevents the artwork from buckling with changes in humidity.

Tip: Use acid-free tape for the hinges. It's reversible and won't contribute to the deterioration of the artwork (see Sources, below). **AW**

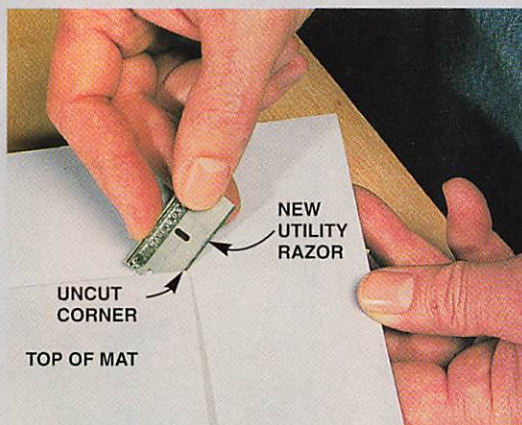Oops!



Oh, no. Can you believe it? I didn't cut out all the way into the corners of the mat opening. Next time I'll get that cutter recommended in Photo 2, page 55 (see Sources, below). It has index marks to show you exactly where to stop the cut for perfect corners. In the mean time I carefully slipped a fresh utility razor into the 45-degree slit from the top side of the mat. Then I rocked the blade gently into the corner to finish the cut. Whew! That mat board is too pricey to waste.

Sources

Highland Hardware, (800) 241-6748
Mat Cutter, #17.77.06; \$16
Double-Faced Tape, 3/4 in. #10.01.51; \$10
1-in. Plug Cutter, #07.68.07; \$25
3/4-in. Forstner Bit, #FB-005; \$11
1/8-in. Slot Cutter, #10.14.48; \$13
1/2-in. Slot Cutter Arbor, #10.12.41; \$4
Bearing, #47708F; \$4.

PENCO, (800) 967-7367

Acid-Free Mat Board, 32 in. x 40-in. sheets;
\$12 to \$16
Acid-Free Linen Tape, #L1533-0751; \$9
White cotton gloves, #NPI0138; \$1 per pair.

Hinge the mat to the mounting board.

Simply butt the top edges together with the mat board face down and the mounting board face-up, and secure with acid-free mounting tape.



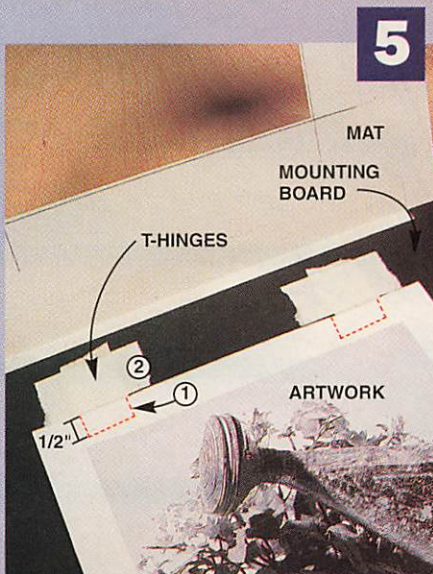
Position the artwork in the mat opening.

A simple block of wood with some acid-free mat board glued on the bottom keeps the artwork from shifting as the mat is raised and lowered for positioning. Don't be tempted to use your finger as a hold-down, acids and oils from your skin will cause the artwork to deteriorate over time.



Mount the art to the mounting board with T-hinges.

1. Fasten tape sticky-side-up on the backside of the artwork, at the top corners only.
2. A second piece of tape is placed sticky-side-down across the first, as close to the artwork as possible. With this technique, the artwork is free to expand and contract.





ART DIRECTION: VERN STREETS • PHOTOGRAPHY: PHIL ZUCKER • ILLUSTRATION: FRANK ROUBACH

WOODEN STORM DOOR



Versatile design keeps winter winds out and lets summer breezes in.

By Tim Johnson

A storm door doesn't just keep out the wind and rain. It's the focal point of your home's entryway; the first thing guests see when they come to visit. An attractive and durable storm door is a woodworking project each member of your family will use every day. To guarantee a long service life, our storm door is made from weather-hardy wood, with mortise-and-tenon joinery and weatherproof, water-resistant glue. It's easy to remove the tempered-glass storm panel and replace it with a screen panel, for year-round comfort.

This door isn't hard to make, it's just big; 36 by 80 inches, a standard size for an entry door. Although you'll need a large, level surface for gluing it together, this project is manageable, even in a small shop. You'll need a tablesaw, a benchtop mortiser or a drill press with a mortising attachment, a router and three 4-ft. pipe clamps. A bandsaw is convenient, but not essential. If you don't have a jointer and planer, have your lumber surfaced at the lumberyard.

CHOOSING MATERIALS

This exterior door will be subjected to the toughest conditions: hot days, cold nights, sunlight, wind, rain and substantial swings in humidity. Two critical factors, durability and stability, should determine the lumber

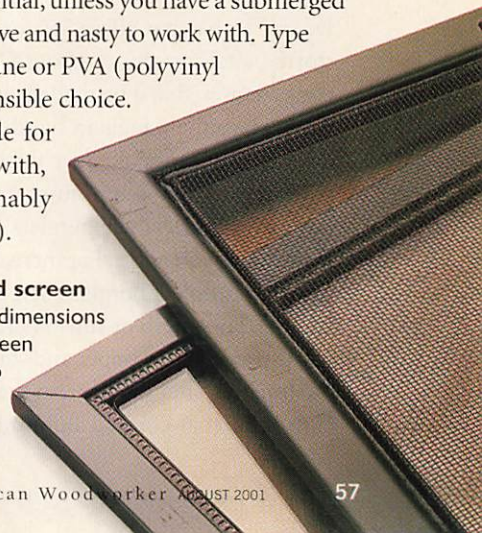
you select. First, use a wood that won't rot, such as Honduras mahogany, teak or white oak. Of these, white oak is the most affordable. If you plan to paint your door, you can substitute furniture grades of ponderosa pine or fir. Second, look for rift- or quarter-sawn boards, indicated by straight grain running end-to-end. They're the most stable. Reject any board that's cupped or twisted. Insist on flat, straight stock. The basic "full view" door requires 15 bd. ft. of 6/4 rough stock.

Mahogany for the door shown in the photo at left, including the full-length internal grid, which requires an additional 7 bd. ft. of 6/4 stock, will cost about \$160.


Waterproof glue isn't essential, unless you have a submerged entryway! Besides, it's expensive and nasty to work with. Type II water-resistant polyurethane or PVA (polyvinyl acetate) glues are a more sensible choice.

They're *weatherproof* (made for exterior use), easy to work with, widely available and reasonably priced (see Sources, page 64).

Interchangeable storm and screen panels have identical outside dimensions and frame thicknesses. The screen panel requires a wide frame to hold its shape. Tempered or safety glass is required for the storm panel.




Chop the Mortises

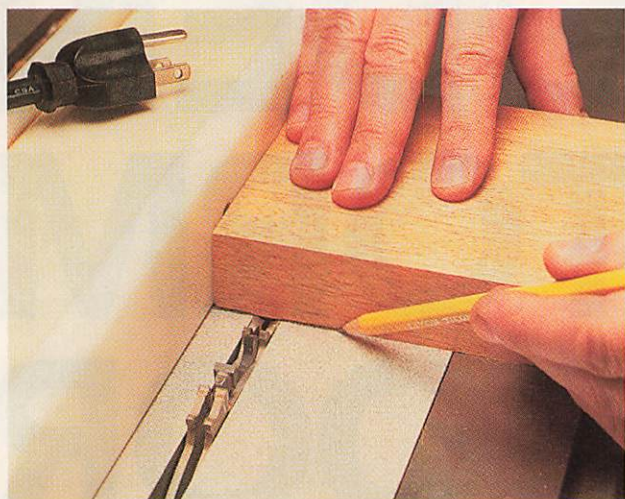

1 MARK THE THROAT PLATE of your saw to indicate where the dado blade begins cutting. This will allow you to stop the dados accurately. Then, carefully set the fence, using offcuts from the stiles or rails to center the dado.

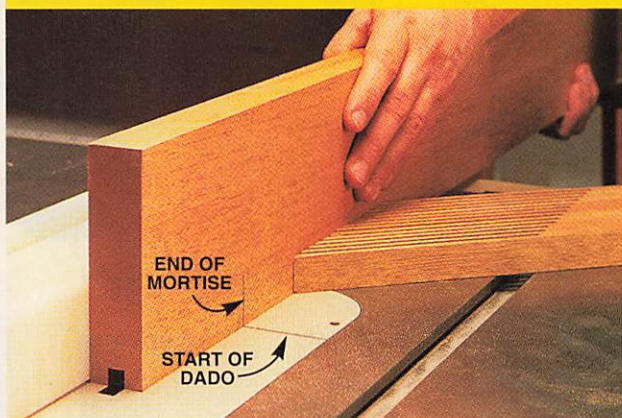SAFETY WARNING: The blade guard must be removed to make this cut. *Be careful.*




2 CUT STOPPED DADOES in the stiles. First, mark the end of the mortise on the stile. Then make the cut, advancing until the lines on the stile and throat insert meet. Stop the saw, remove the stile, turn it around and dado the other end.

Don't scrimp on your finishing products. Exterior-grade enamel paint will last the longest. If you want to show off the wood, make sure to choose a finish that contains both UV absorbers *and* pigments. These finishes are translucent, rather than clear, and add a honey-amber color to the wood (see Sources, page 64). Before applying any finish, clean the door by wiping it with a cloth dampened with acetone. Then brush a couple coats of thinned-down weatherproof glue on the exposed end grain, especially at the bottom of the door.

STORM AND SCREEN PANELS

Storm and screen panels can be purchased cheaply enough that it's not worth your time to make them yourself. You'll find local manufacturers in the Yellow Pages, under "Screens" or "Storm Windows and Doors." Plan to pay about \$50 for the screen panel. The storm panel costs more, about \$120, because building codes require that it be made from tempered or safety glass. Have the panels in hand before you build the door, so you can make sure they'll fit.

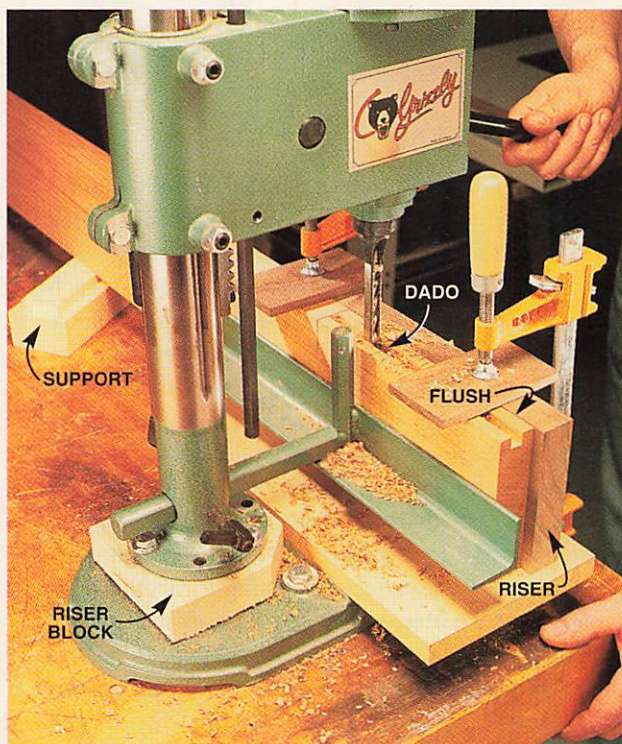Fiberglass and aluminum are the most common screening materials. Fiberglass is more flexible, but aluminum is stronger. For increased durability, "pet-" or "paw-proof" fiberglass screen has a heavy vinyl coating. Fine mesh or sun-blocking fiberglass weaves are also available. Copper and stainless steel screen are the toughest, but they're also the most expensive. We chose charcoal-colored aluminum.




3 MORTISE THE STILES, using the dado to center and guide the chisel. It's easy to modify your benchtop mortiser to accommodate the long, wide stiles. Increase capacity with a riser block. Add outboard support to keep the stile level. Fabricate a special hold-down, using scraps for arms and a riser that's the same width as the stile. Center the chisel and set the fence. Then snug the riser up against the stile, add the arms and clamp them to the base.



Detail 1

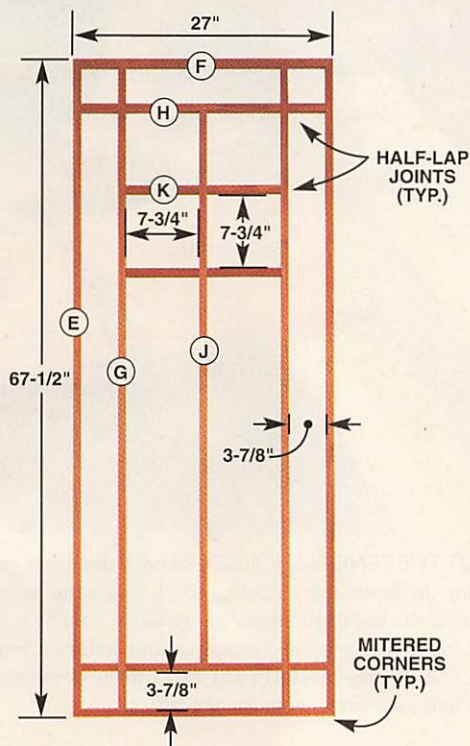Dimensions for door grid in lead photo, page 56.



Haunched tenons, doubled at the bottom, make the door strong enough to withstand decades of slamming.


CUTTING LIST

Overall Dimensions:
1-1/8" x 36" x 80"

| Part | Name | Qty. | Dimensions |
|------|------------------------|--------------|--------------------------|
| A | Stiles | 2 | 1-1/8 x 4-1/2 x 80 |
| B | Upper Rail | 1 | 1-1/8 x 4-1/2 x 31-1/4 * |
| C | Lower Rail | 1 | 1-1/8 x 8 x 31-1/4 * |
| D | Screen/ Storm Panel | 1 of each | 5/16 x 29 x 69-1/2 |
| E | Grid Outer Stiles | 2 | 3/4 x 1-1/16 x 67-1/2 |
| F | Grid Outer Rails | 2 | 3/4 x 1-1/16 x 27 |
| G | Grid Inner Stiles | 2 | 3/4 x 1-1/16 x 67-1/2 |
| H | Grid Inner Rails | 2 | 3/4 x 1-1/16 x 27 |
| J | Grid Center Stile | 1 | 3/4 x 1-1/16 x 58-1/4 |
| K | Grid Center Rails | 2 | 3/4 x 1-1/16 x 17-3/4 |


*Includes 2-1/8"-long tenons on both ends

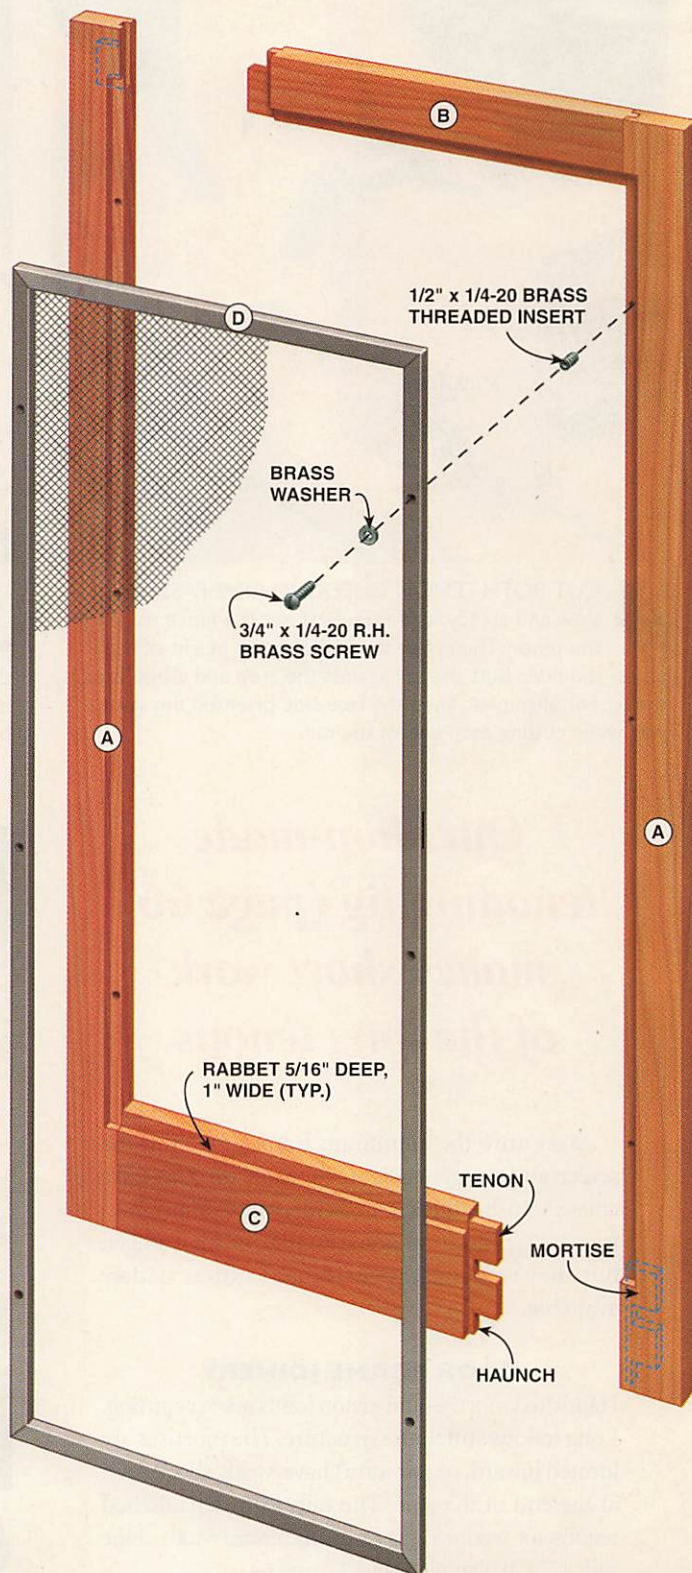FIG. A SCREEN DOOR EXPLODED VIEW




Cut the Tenons

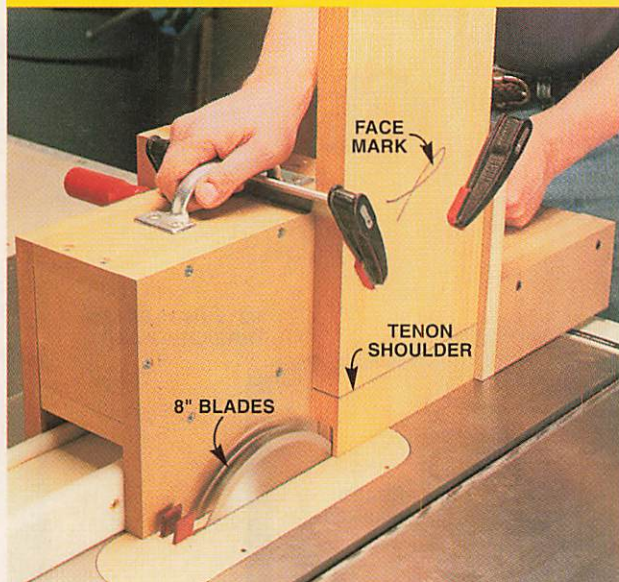SAFETY WARNING: The blade guard must be removed to make this cut. *Be Careful!*



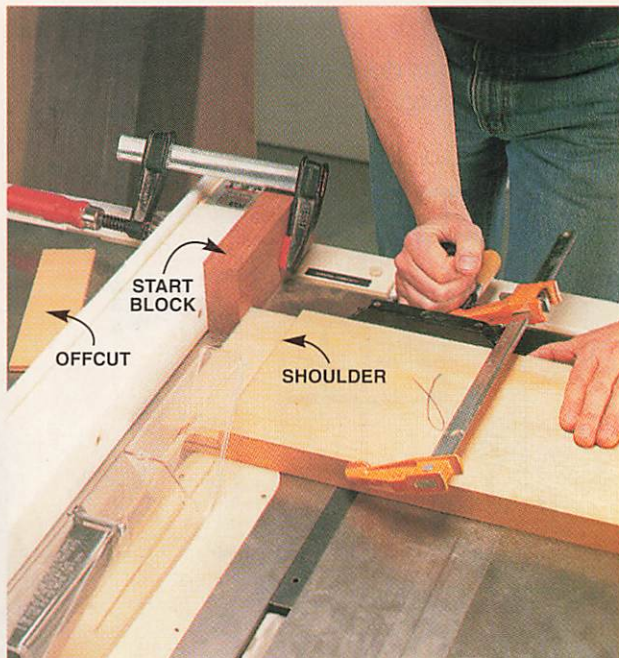4 CUT BOTH TENON CHEEKS IN ONE PASS with a slow and steady feed rate. First, set the fence to center the tenon. Then raise the blade to the height of the tenon shoulder. Butt the rail against the stop and clamp it to the jig. For alignment, keep the face side oriented the same way while cutting each end of the rail.




5 CUT THE TENON SHOULDERS with the miter gauge, using the fence and a starting block to set the length. Clamp the rail to the miter gauge while holding it against the block. Make sure the rail clears the block before it reaches the blade. The starting block creates extra space between the blade and fence to allow room for the offcut.

*Our shop-made
tenoning jig (page 66)
makes short work
of the long tenons.*

Make sure the aluminum frames for both the screen and storm panels are the same thickness. We chose 5/16-in.-thick, 1-in.-wide, rolled-aluminum frames. Architectural-grade extrusions are stronger, but they're more expensive and not as widely available.


DOOR FRAME JOINERY

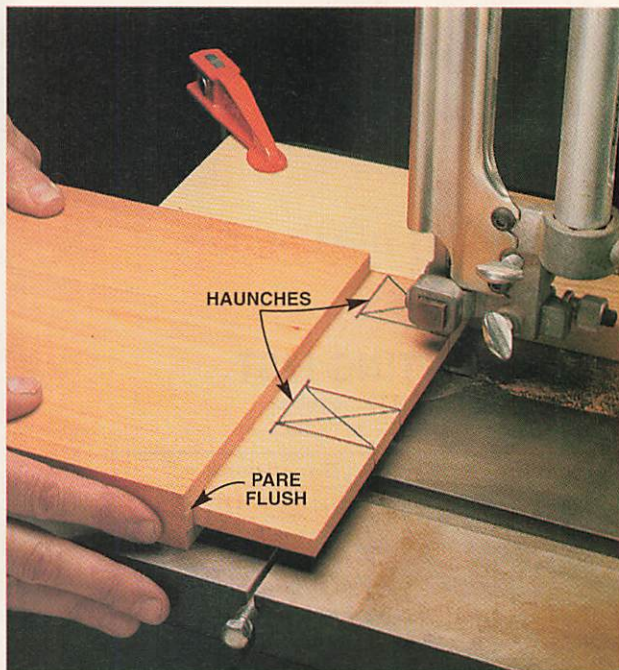Haunched mortise-and-tenon joints are very strong. Long tenons stiffen the structure. The mortises are located inward, so they don't have weak, short grain at the end of the stile. The rails feature haunched tenons, for secure joints across the entire width of the rails (Fig. B, Details 1 and 2, page 64).



6 BANDSAW THE TENONS to width and remove the waste with freehand cuts, leaving the haunches. Pare the short shoulder flush with a chisel.

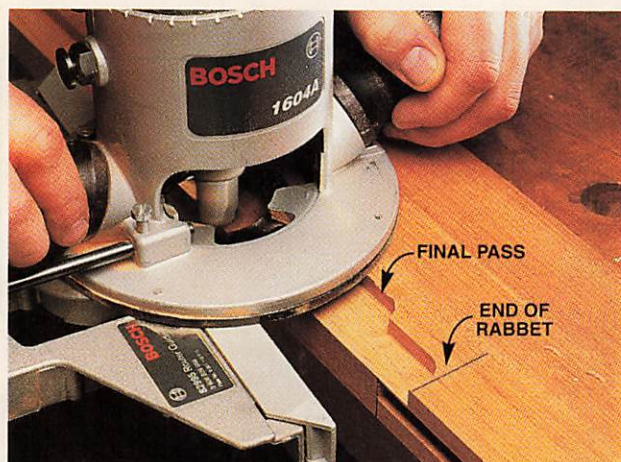Install the Screen and Storm Panels



7 ROUT RABBETS FOR THE SCREEN PANEL (before the door is glued together), in several passes, with a straight-cutting bit and an edge guide. Rout the rails first, full length. Then dry-fit the door and mark the stop points on the stiles so you can rout them.

Good-fitting mortises and tenons require precision from both your machines and your stock. Make mortising easier by using centered dados to set up and guide the mortise chisel (Photos 1 through 3). Our shop-made tenoning jig (see “Foolproof Tenons,” page 66), outfitted with the outside blades from an 8-in. dado set, accurately cuts both tenon cheeks in one pass (Photo 4). The only trick is to get the blades spaced correctly so the tenon fits the mortise. Finish the joints by trimming the tenon shoulders (Photo 5) and cutting the haunches (Photo 6).

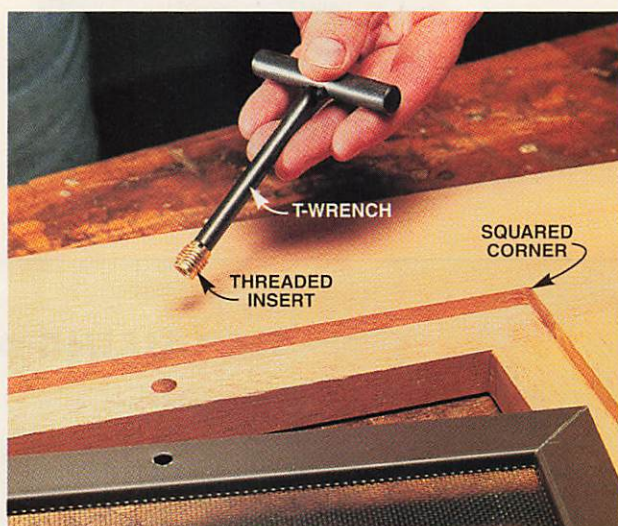
The rabbets for the screen and storm panels are too wide for a rabbeting bit, so they have to be routed before the door is glued together. Most of the waste on the rails can be cut away on the tablesaw, because the rabbets in the rails run full length (see Fig. B, Detail 2, page 64). The stiles require stopped rabbets (Photo 7).

You'll need three 4-ft. clamps for gluing; one for the top joints and two for the longer joints at the bottom. Cover the pipes with tape or plastic to keep the bottom side of the door from getting stained black wherever squeezed-out glue contacts the steel. Minimize squeeze-out by coating only the mortise walls and tenon cheeks with glue. Enough will spread during assembly to cover the face of the stile and the tenon shoulders (Photo 8). Clamp the door together and check to see that the glue-up is flat and square. Remove the squeezed-out glue before it hardens.



8 STRONG JOINERY makes this door sturdy. Weatherproof glue makes it last. Haunched mortises and tenons, doubled on the wide bottom rail, secure all four corners. New, extended-open-time, water-resistant glues allow enough time to glue and clamp this large assembly without rushing.

Threaded inserts make it easy to switch the storm and screen panels.




9 INSTALL THREADED INSERTS in the door rabbet with a T-wrench (see Sources, page 64). First, glue the door together and square the corners of the rabbet. Install the screen panel and drill pilot holes for the inserts. Remove the screen panel and use it as a template for drilling the storm panel. Fasten the panels with brass machine screws and washers.

Customize Your Door by Adding . . .


Additional Stiles and Rails

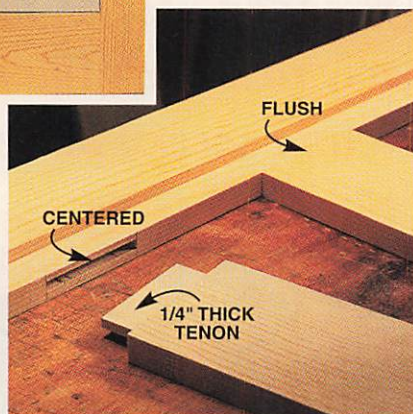Plane internal frame pieces thinner, flush with the rabbet, so you can still use single screen and storm panels. Center the mortises and use thinner tenons. If you'd rather have separate upper and lower storm and screen panels, leave the top middle rail full thickness, and rabbet both edges.



Solid Panels

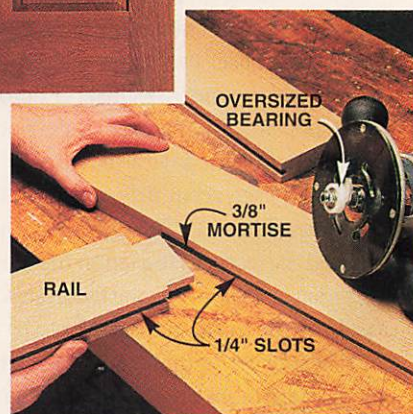CUT SLOTS FOR THE PANELS with a 1/4-in. slot-cutting bit. Limit the depth of the slot to 3/8-in. by using an oversized bearing (see Sources, page 64).



INSTALLING A SCREEN DOOR

Think of a screen door as a very large cabinet door that's going to be inset-mounted. Build the door to the dimensions of the opening. You may have to adjust the overall dimensions given in the Cutting List (page 59). For example, an 8-ft. tall door requires wider stiles and rails, for appearance and stability.

When fitting the door, allow 3/16 in. clearance in width and 1/4 in. in height. Cut the bottom at a 12-degree angle, to match the

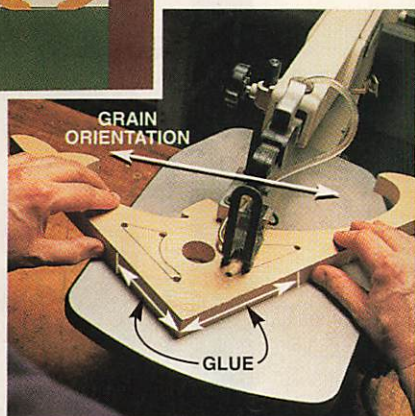
threshold. Then shim the door from underneath until it barely touches the top of the opening. Snug the hinge-side stile against the jamb and mark the three hinge locations on both pieces. Use four hinges for taller or heavier doors. Cut the hinge mortises, install loose-pin hinges and remount the door. Even out the gaps at the top and on the latch side with a block plane. Finally, install the latch, striker plate and door closer.

Extra Stiles and Rails, Panels, Brackets or Grids






Brackets and Spindles

SAW DECORATIVE BRACKETS. Victorian brackets and spindles are available ready-made through the mail (see Sources, page 64). Accommodate wood movement by orienting the grain diagonally. When you fasten the brackets, glue only the inside corners and use brass screws in slotted holes at the ends.



An Ornamental Grid

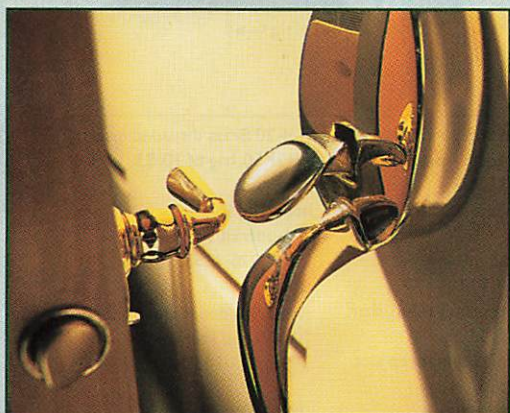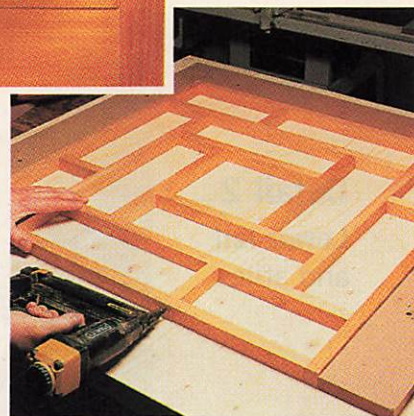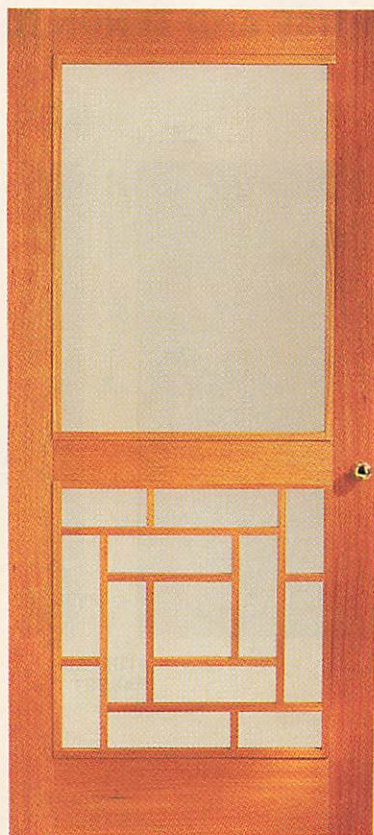ASSEMBLE GRIDS inside a shop-made frame that's exactly the same size as the opening in the door. When you glue the grid together, remove one side of the frame at a time to attach the outer pieces. Fasten the completed grid to the door, flush with the rabbet.



Oops!

After I got the door hung, I thought I was home free. Argh! The screen door smacks right into the main door latch! Now I'm faced with big holes to patch and I'll be reminded of

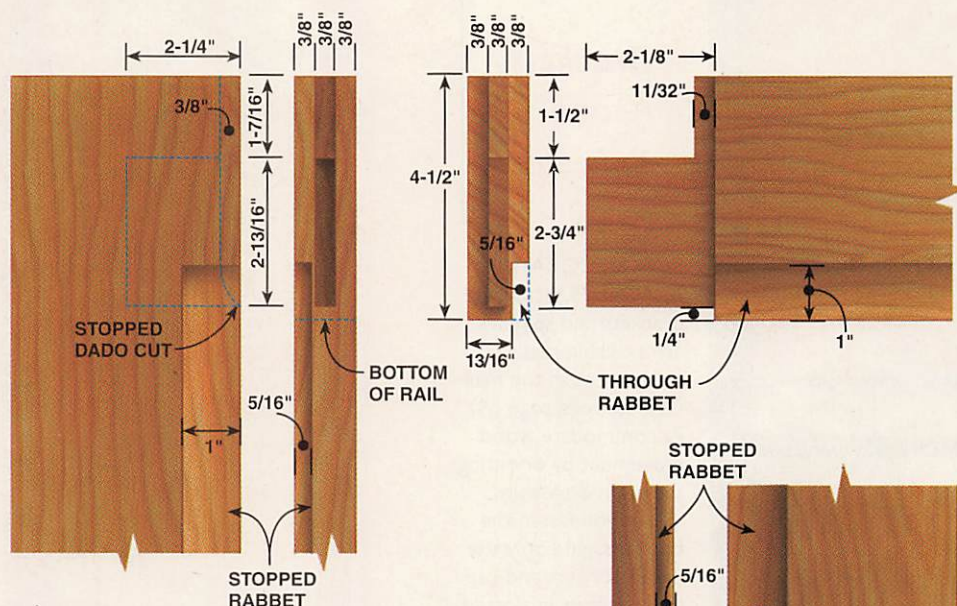
my mistake every time I open the door!

So before you drill the holes for the screen door knob, make sure it won't interfere with the latch set on your entry door.


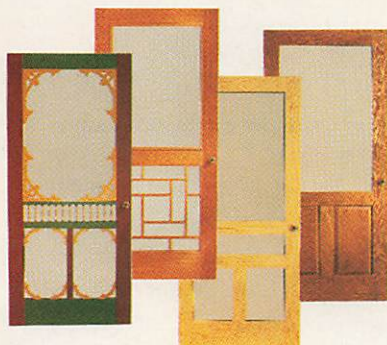


FIG. B MORTISE AND TENON DIMENSIONS

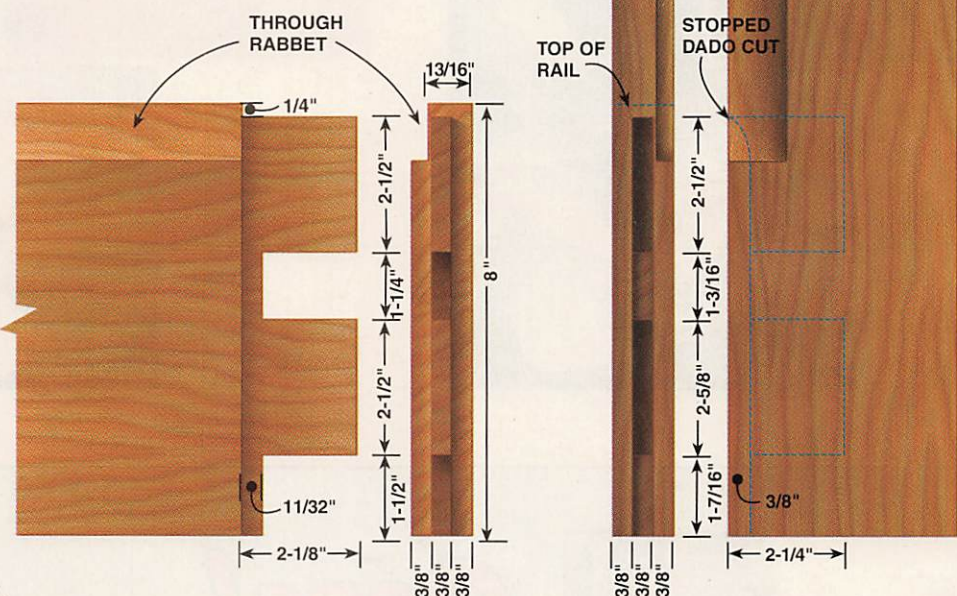Detail 1 Upper rail and stiles



Detail 2 Lower rail and stiles



SOURCES

Weatherproof, water-resistant Glues
Titebond II Extend
#16.50.21, 1 pint; \$5
Gorilla Glue
#16.50.14, 18 oz.; \$20.

Lumber
A&M Wood Specialty, Inc.
(519) 653-9322
www.forloversofwood.com

Translucent exterior finishes
Sikkens North America
(800) 833-7288
www.sikkens.com

1/4-in. Slot cutter
#10.14.50; \$13
Slot cutter arbor, 1/2-in. shaft
#10.12.41; \$4
Bearing for 3/8-in.-deep slot
#47728F; \$9
Highland Hardware
(800) 241-6748
www.highlandhardware.com

1/4-20 Brass threaded inserts
#12K50; bag of 10; \$3
T-wrench
#12K55; \$5
Woodcraft Supply
(800) 225-1153.

Victorian doors and parts
The Wood Factory
(936) 825-7233.

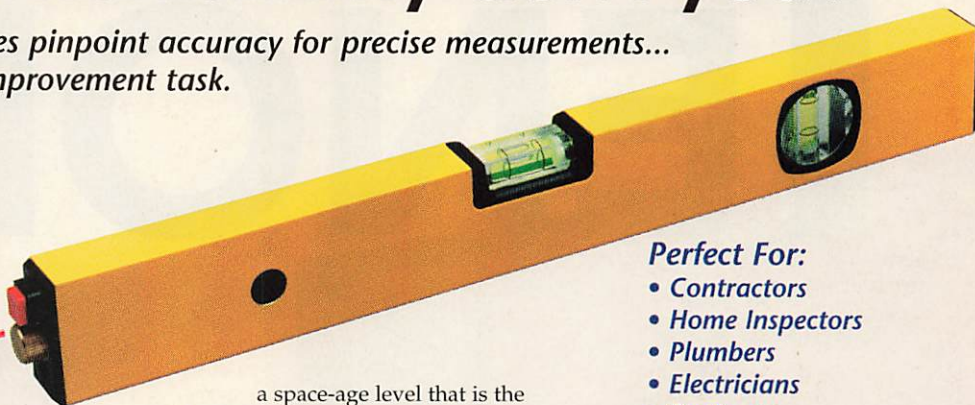
AW

Professionals use laser for precise measurements...why don't you?

New Laser Level provides pinpoint accuracy for precise measurements...for almost any home improvement task.

by Richard Maloy

Do you ever watch home renovation shows on TV and wonder how they manage to complete their projects so quickly? In about the time it takes me to find my missing screwdriver, they've installed eight ceiling fans and built a deck. I also have the same problem when trying to line up pictures and paintings around the house. No matter how many people I have with me telling me, "a little more to the left, no, a little more to the right," I never seem to get the frames perfectly aligned. I know one thing that helps the people on TV complete jobs so quickly, and hang pictures straight: laser technology. Now, an innovative company has introduced



a space-age level that is the ultimate in precision.

Do-It-Yourselfer's dream. Even if the project has gone wrong in countless ways, I'll still feel that I need to finish what I started. And I'm the type of person who has to do things on their own. This of course takes more time than I've got, but now with the Laser Level, I can make precise measurements the first time around, leaving no room for errors. The Laser Level is a 16-inch machined aluminum level with an incredible laser light. It can project a dot or a line on any surface...at a distance of up to 1500 feet! That means that anytime you need to line something up or make it perfectly level, all you do is turn on Laser Level and mark the spot. It features high quality horizontal and vertical bubble levels. The handy lens refractor clips onto the end of the unit, letting you select the line or the dot image. The level includes a threaded tripod mount and is inscribed with a ruler with indications to 1/8 inch. It's perfect for everyone from contractors and engineers to interior designers and home craftsmen.


Factory direct limited time offer. Laser technology has come a long way over the years. What originally began in research labs for high level military applications is now the newest way to make home improvement easier than ever. We've been working with the makers of this high quality product for years, so we can offer it to you at a special volume discount. Call today and you'll never hang a crooked picture again.

Risk-free precision. If you're anything like me, you open up your home frequently for guests, but it's also a place where you want to enjoy your surroundings on a day to day basis. That means when it's time to make renovations, or hang new pieces of artwork, you want the job to be done quickly and accurately...the first

Perfect For:


- Contractors
- Home Inspectors
- Plumbers
- Electricians
- Engineers
- Craftsmen
- Interior Designers
- Do-it-Yourselfers

Measure like the professionals




Laser provides ultra-accurate measurements up to 1500 ft.

- Lay perfectly straight floor tiles



- Ensure that walls are level



- Never hang a crooked picture again

Mark's story



The Laser Level is just about the coolest gadget we have seen in years! No self-respecting handyman should be without one.

Results not typical.

time. Now you don't have to be a TV Tool Guru to accomplish this. The latest measurement technology is available to you right now. The Laser Level comes with a 90-day manufacturer's limited warranty and TechnoScout's exclusive home trial. If you are not satisfied for any reason, simply return it within 30 days for a full "No Questions Asked" refund.

LASER Level™ \$39.95 \$7.95 S&H

Please mention product code 8218-20997

For fastest service, call toll-free 24 hours a day

800-992-2966



To order by mail, send check or money order for the total amount including S&H. To charge it to your credit card, enclose your account number and expiration date.

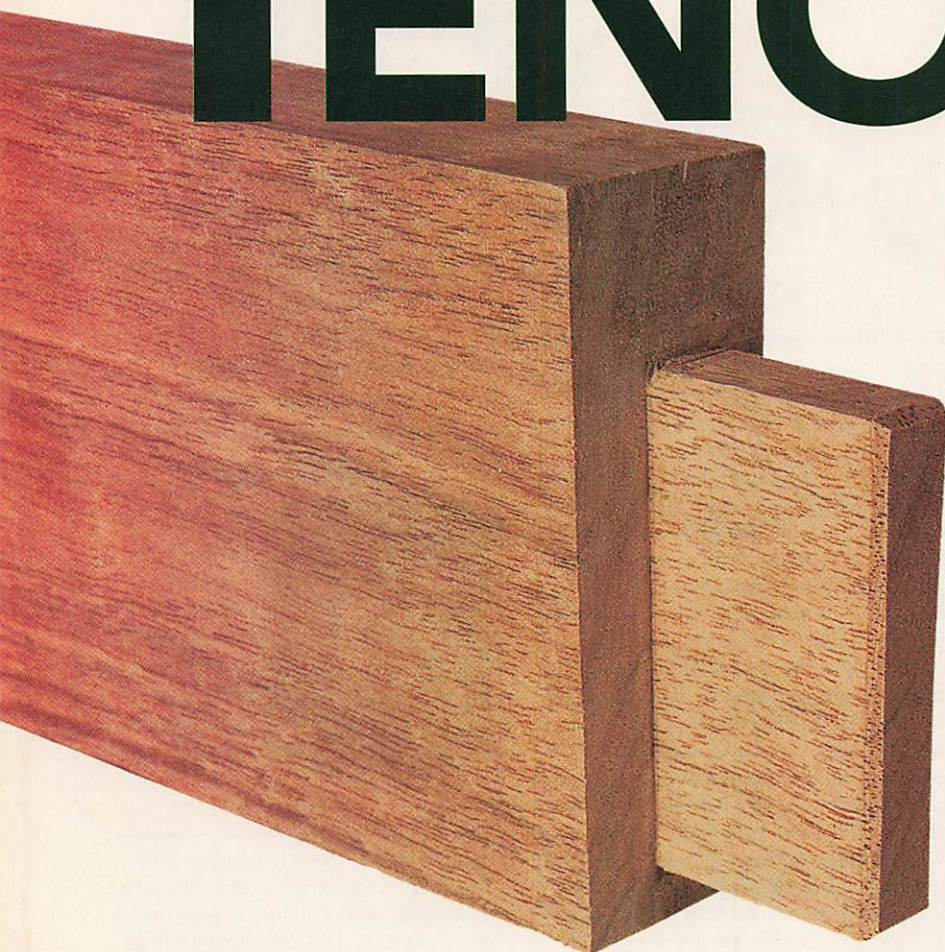
Virginia residents only—please include 4.5% sales tax.

Latest...Greatest...Neatest...Coolest...

You can see hundreds of high-tech products at www.technoscout.com

TECHNOscout
1998 Ruffin Mill Road
Colonial Heights, Va 23834

T Foolproof TENONS




*Two blades and
a rock-solid jig guarantee success.*

Mortise and tenon joinery is the heart of many classic furniture projects. It's an incredibly strong, time-tested method of connecting boards. Making these precisely fit joints can be fussy and demanding work. But it doesn't have to be.

There are at least a dozen ways to cut tenons. We've chosen a technique that delivers the goods

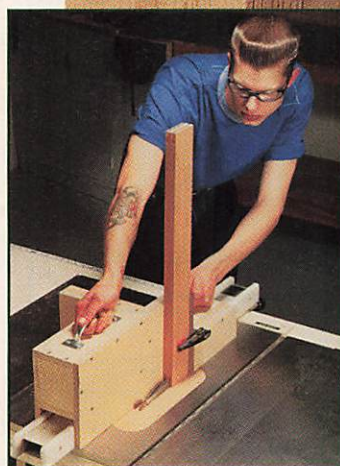every time, whether you're a beginner or seasoned pro. It's simple, safe and economical. Best of all, this technique will save you a lot of set-up time. Rather than fit tenons by trial and error for each project, you can easily reproduce the same size tenons, time after time.



WHAT YOU'LL NEED

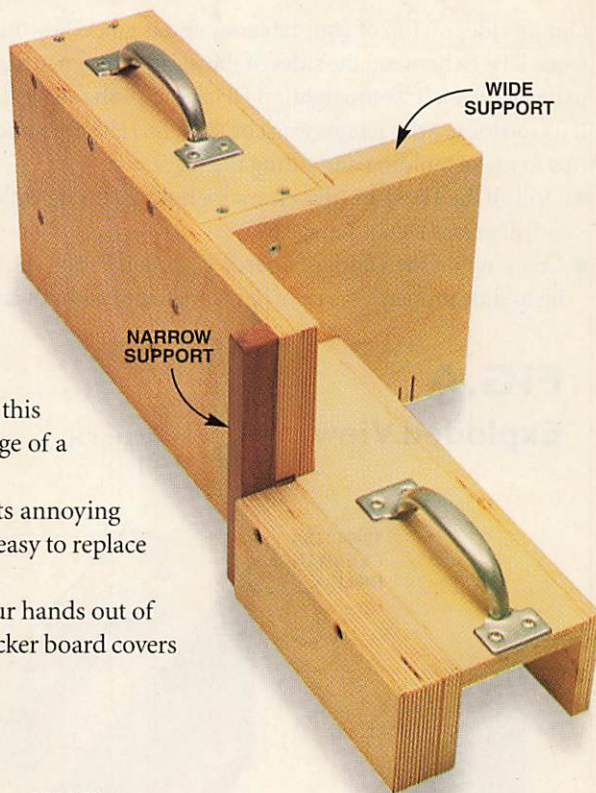
A Tenoning Jig

You can buy a commercial jig or make a better one yourself. Looking for a better mousetrap, we designed a heavy-duty jig that slides on top of a tablesaw fence. (Your fence must have parallel sides for this jig to work, however. If you have an L-shaped fence, see the jig in AW #81, page 55.)

Features:

- **Large capacity.** The 8-in.-tall sides are high enough to support a rail up to 36-in. long.
- **Dedicated sides.** No commercial jig offers this handy feature. The left side supports the edge of a rail; the right side supports the face.
- **No tear-out.** None. A backer board prevents annoying tear-out when you rip the tenon cheeks. It's easy to replace the backer board when you change settings.
- **Safe operation.** Generous handles keep your hands out of harm's way. An oversize block behind the backer board covers the saw blade after it makes the cut.


See page 68 for details on how to build the jig.



Two Saw Blades and Spacers

Make smooth-sided tenons with a pair of matched sawblades separated by spacers. You can use the outside cutters of a dado set or two carbide-tipped 7-1/4-in. circular saw blades (about \$8 each).

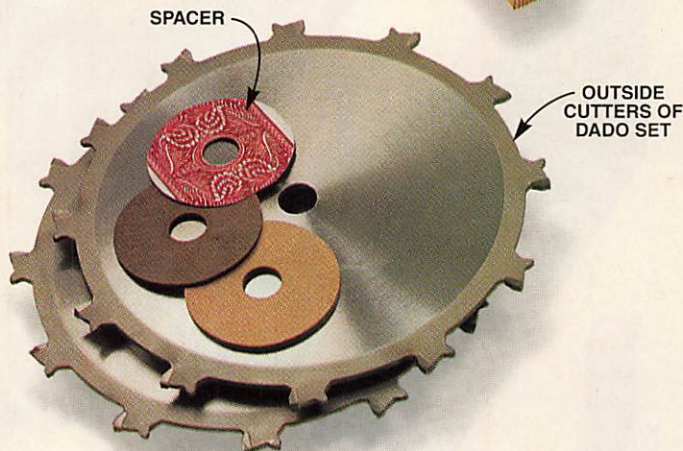
See page 70 for more information on how to make spacers.



Two blades and spacers guarantee a perfectly sized tenon time after time.

A Zero-Clearance Insert with Splitters

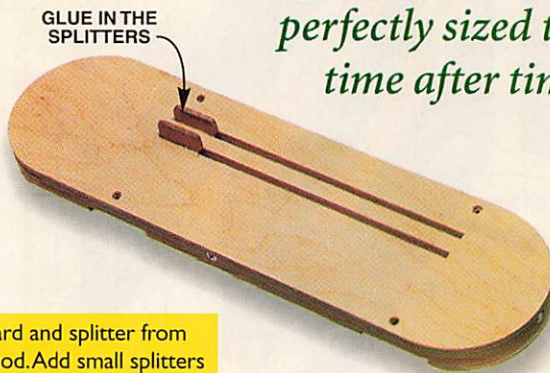Make a dedicated insert for your tablesaw so your tenon cutting is as safe as possible. Although the parts you cut will be clamped to the jig, this insert provides additional support from underneath.



Caution: You must remove the blade guard and splitter from your tablesaw to cut tenons with this method. Add small splitters to a wooden insert to minimize the possibility of kickback.

BUILD THE JIG

Our jig rides on top of your tablesaw and is guided by the fence. The fit between the sides of the jig and the fence has to be just right. If it's too tight, you'll have to push too hard. If it's too loose, your tenons won't be straight. Here are some tips to make building and fitting the jig easier:


- Drill all the 13/64-in.-dia. clearance holes in the jig with a drill press (Detail 1, page 69).
- Creep up on the width of boards C, D, and E. For your jig to slide properly, the right fit is a matter of 64ths of an

inch. Rip the boards slightly oversize, then clamp them between the faces of the jig and try sliding the jig along your saw's fence.

- If your jig is too tight, shim the edges of boards C, D and E with masking tape. Don't laugh! It's an effective way to fine-tune the fit.
- Clamp the jig together and make sure it's square to the top of the tablesaw before drilling any pilot holes and driving in the screws. Don't glue the jig together. You may need to disassemble it later to adjust the fit.

FIG.A

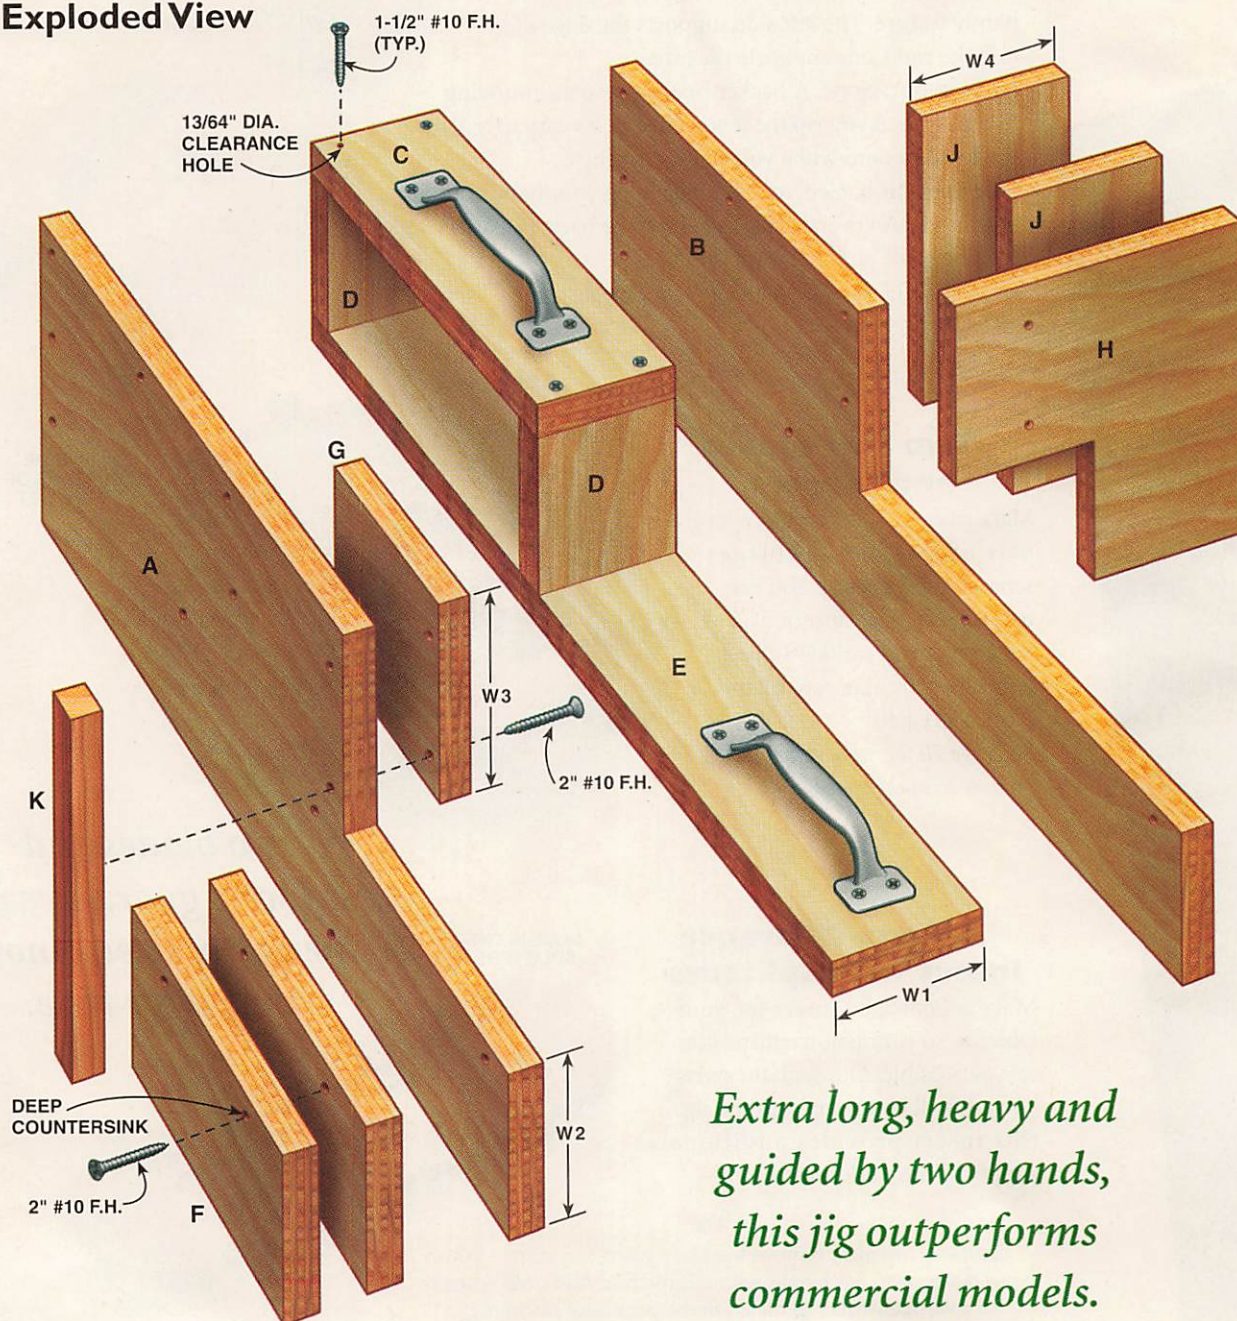Exploded View



Extra long, heavy and guided by two hands, this jig outperforms commercial models.


CUTTING LIST

Heavy-Duty Tenoning Jig


3/4-in. Baltic Birch Plywood or MDF

| Part | Name | Qty. | W x L | Comments |
|------|-------------|------|-------------|---|
| A | Left side | 1 | 8 x 24 | |
| B | Right side | 1 | 8 x 24 | |
| C | Top | 1 | W1 x 10-3/4 | W1 = thickness of your fence. |
| D | Middle | 2 | W1 x L | L = 5-3/4" minus height of your fence. |
| E | Bottom | 1 | W1 x 24 | |
| F | Blade cover | 2 | W2 x 8 | W2 = height of your fence plus 1-1/2." Glue together. |
| G | Stiffener | 1 | W3 x 5-1/4 | W3 = 6-1/2" minus height of your fence. |
| H | Wing | 1 | 8 x 8 | |
| J | Stiffener | 2 | W4 x 8 | W4 = to fit. Glue J to H. |
| K | Backer | 1 | 3/4 x 8 | |

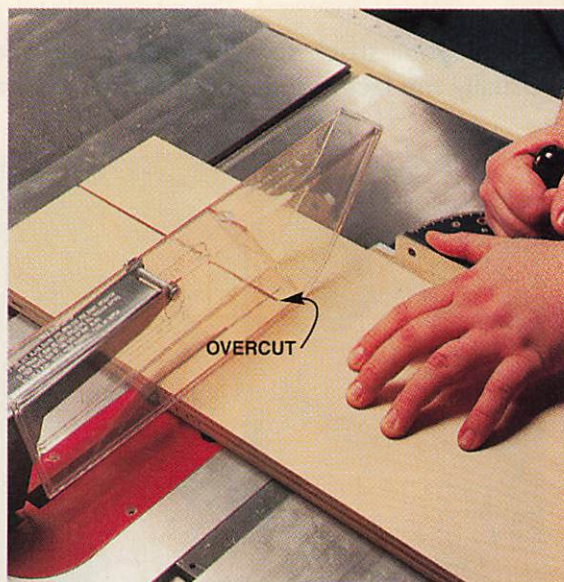Hardware: 50 1-1/2" #10 FH screws, 4 2" #10 FH screws, 2 extra-large pulls.



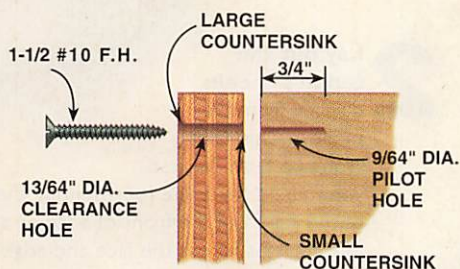
Cut the corners of the jig on the tablesaw (Detail 2). Stop the cut at the pencil line and withdraw the board. The bottom side of the board may be overcut, but that's OK. It's only a jig!



DETAIL 1

Cross Section of Typical Screw Holes

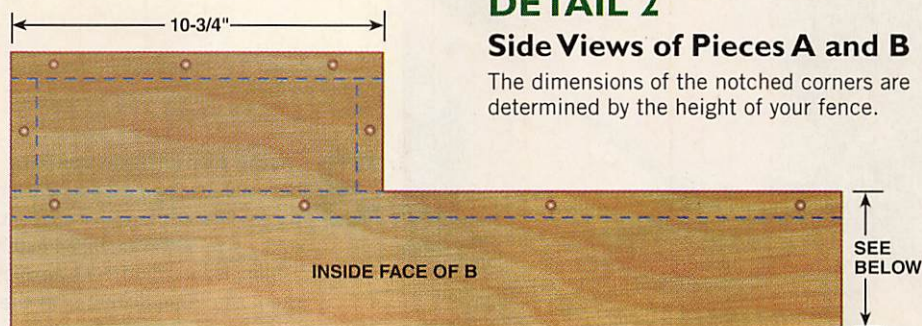
Countersink the back sides of all the clearance holes so the parts of the jig butt tightly together.



DETAIL 2


Side Views of Pieces A and B

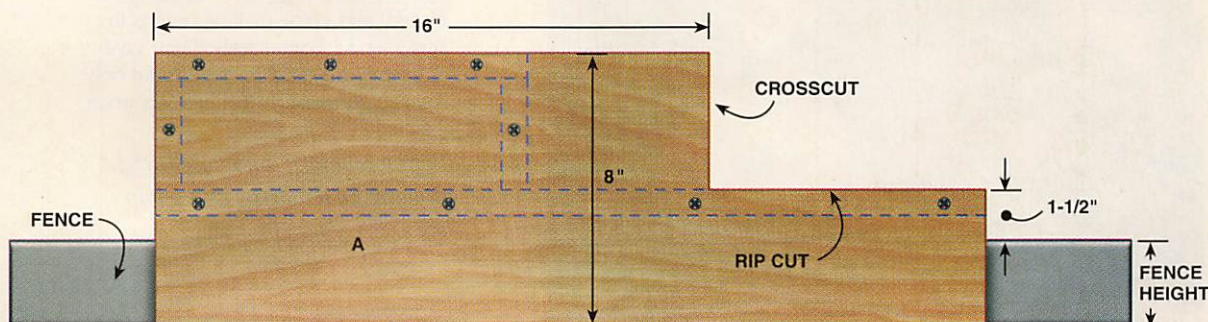The dimensions of the notched corners are determined by the height of your fence.




GETTING STARTED

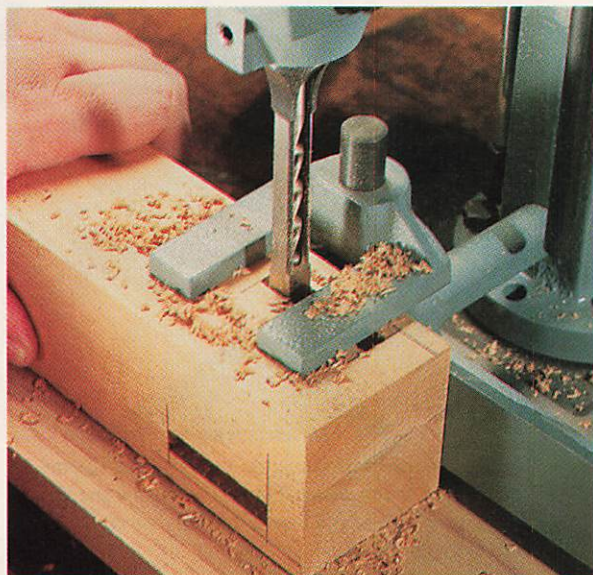
Mill all your stock straight and square, and boldly mark the face and edge of each piece. Usually the face side is the **outside** of a rail and the reference edge is the **top** of a rail.



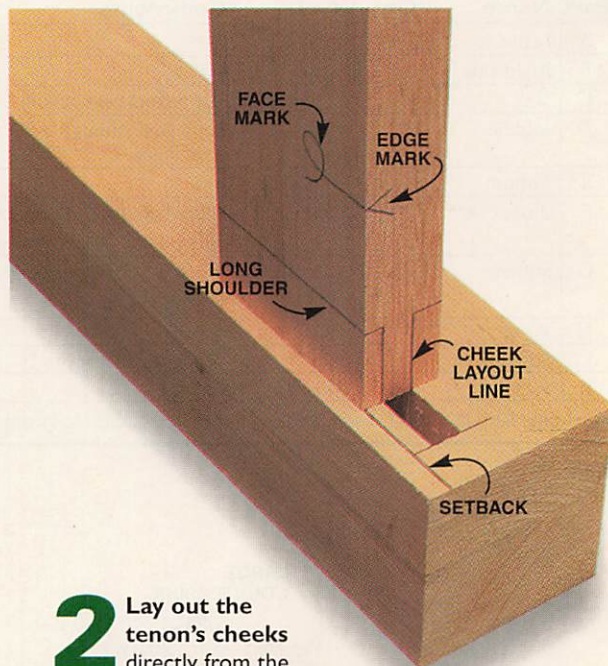- 1 Make the mortises first.** It doesn't matter whether you use a mortising machine, a router or a drill press. It's far easier to fit a tenon into a mortise than it is to customize a mortise to fit a tenon.



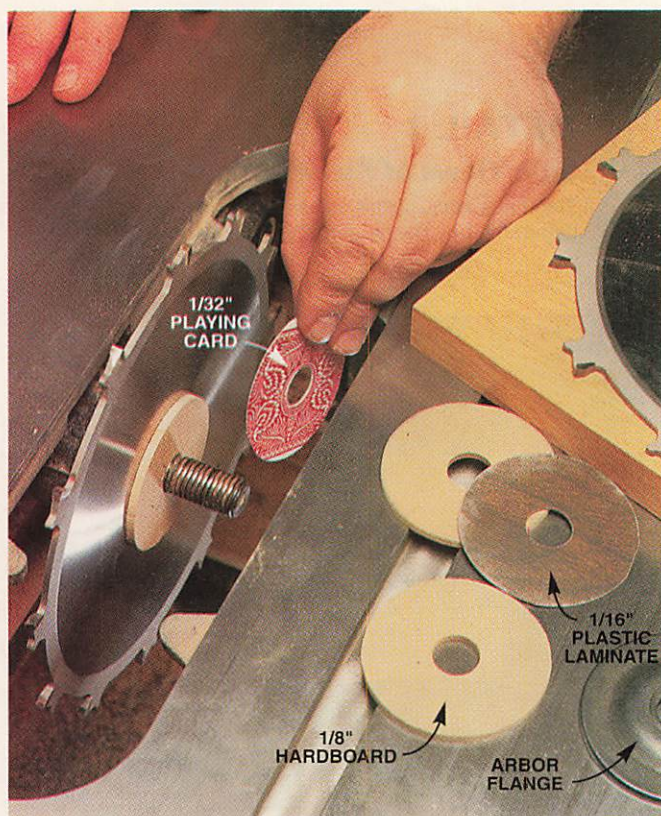- 2 Lay out the tenon's cheeks** directly from the mortise. This joint won't be flush, so first you must draw a line representing the setback of the rail from the front of a leg or a stile. Draw lines across the face and edge of the rail representing the shoulders of the tenon so you can set the height of the cut on the tablesaw.




- 3 Install homemade spacers** between the saw blades. You'll need three different kinds of spacers to fit every size tenon (approximately 1/8 in., 1/16 in. and 1/32 in. thick). Make them the same diameter as the flange on your saw's arbor. The best way to figure out the right mix of spacers is by trial and error, making tenons in scrap wood. Fortunately, if you save and label the spacers you should only have to go through this process once.

For more information on the right fit between a mortise and tenon see Q&A, page 10.


CUT THE CHEEKS

One pass through your ganged-up saw blades and you've cut *both* sides of the tenon.

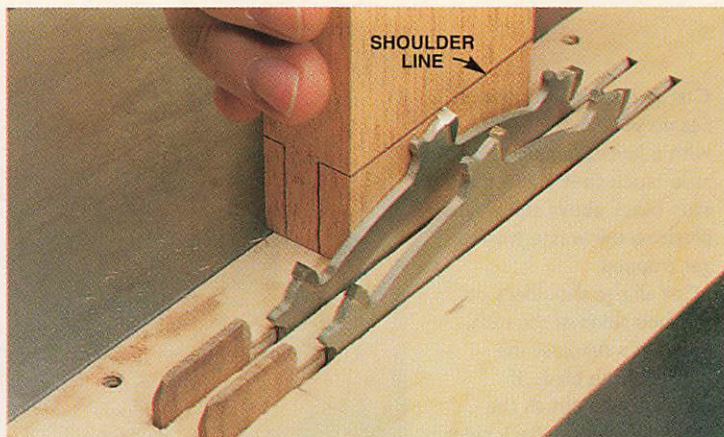- 4** Raise the blades to match the shoulder line on your rail.




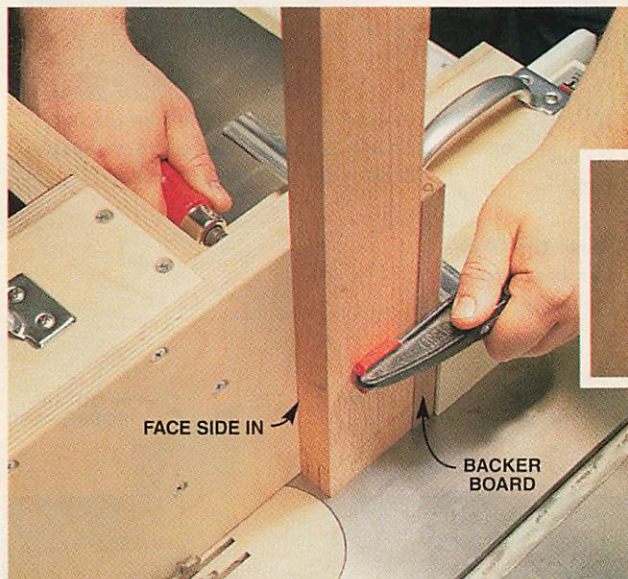- 5** Clamp the rail to the tenoning jig, face side in, and adjust the tablesaw's fence so the layout marks line up with the two saw blades (inset, below).



*Try a pair of
inexpensive 7-1/4-in.
circular saw blades.
They work surprisingly well.*

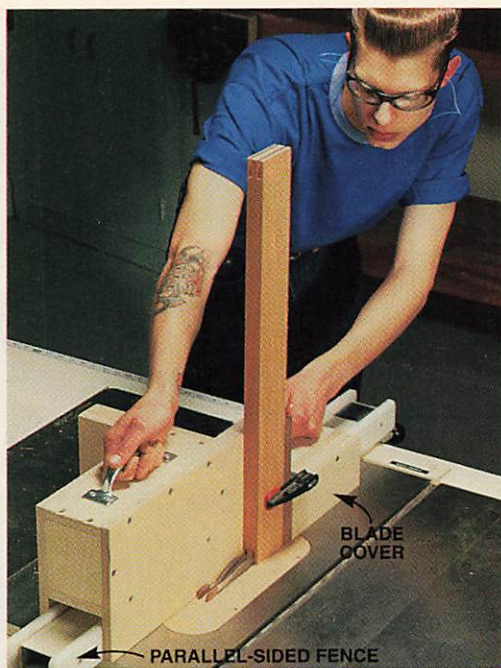- 6** **Rip the cheeks.** Slide the jig through the cut, then pull the jig back and unclamp the rail. Rip all your tenons. Make sure the *marked face* of each of your rails is the face you clamp against the jig. When you're done, remove the double blades from the tablesaw and install a crosscut saw blade.





Caution: To avoid kickback, your fence must be adjusted so it's parallel to the saw blades.

CUT THE LONG SHOULDERS

Make perfect, tight-fitting shoulders with a crosscut saw blade.

7 **Cut the long shoulders.** Set up your miter gauge with a fence, and clamp a stop block to it. Raise the stop block above the waste piece so the waste won't get trapped.

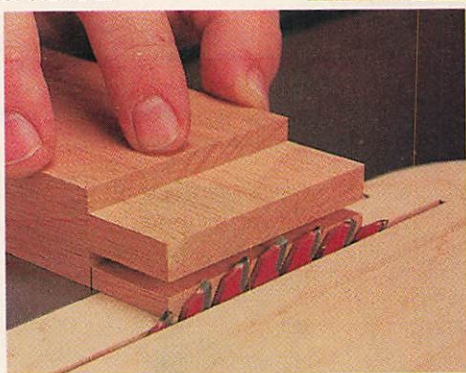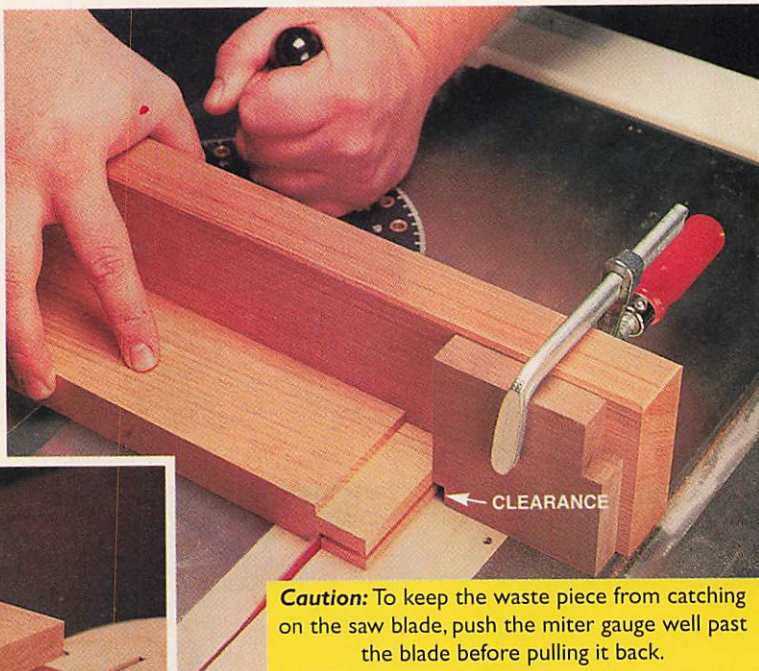Cut all the shoulders on the face sides of the rails first. Then readjust the height of the blade, if necessary, to cut all the shoulders on the back sides of the rails.




Raise the blade so it barely touches the cheek.

Oops!

My shoulders are drooping! I thought they were going to line up just right but somehow they became offset. I checked the ends of the rail with an accurate square, and wouldn't you know it, they were off. The culprit is my miter gauge. It wobbles in the slot, so I don't get an accurate 90-degree cut every time. And if the shoulder cuts (Photo 7) aren't exactly

square, the shoulders won't line up at the edges.

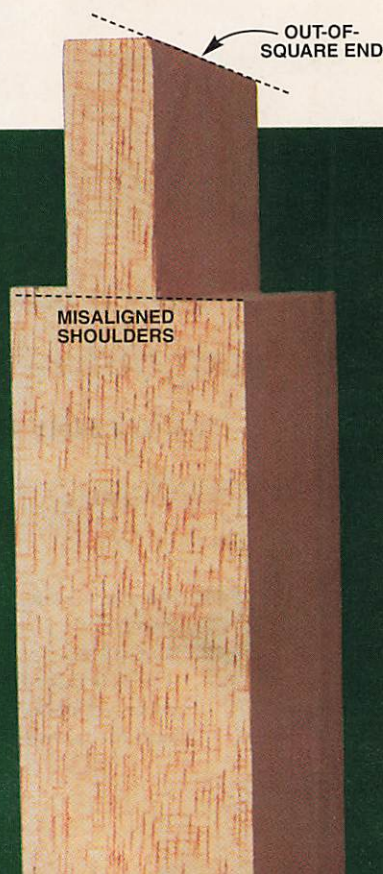The fix? I bought a premium miter gauge (\$100 to \$170, see AW #81, page 81) that fits tighter in the slot. Rather than toss out the rails, I re-cut both ends as little as possible and re-cut the shoulders. Now my project is a bit smaller than originally planned, but the joints are perfect.






CUT THE TENON'S WIDTH

Make two rip cuts on the right side of the tenoning jig. They establish the tenon width.

8 Mark the width of the tenon directly from the mortise.

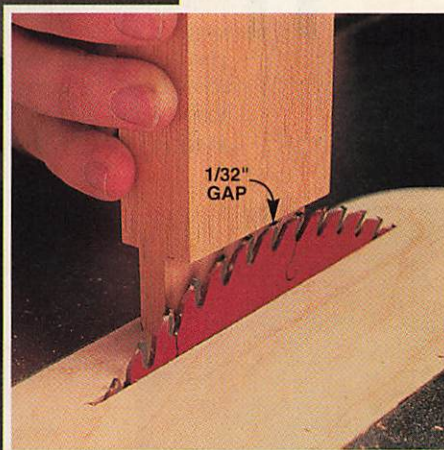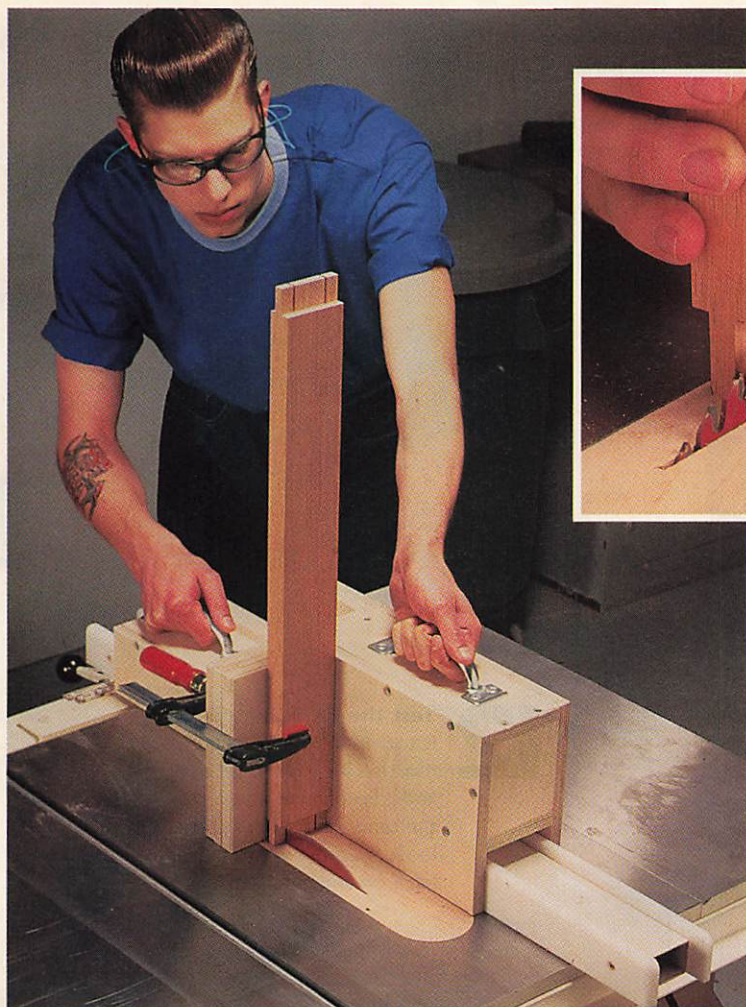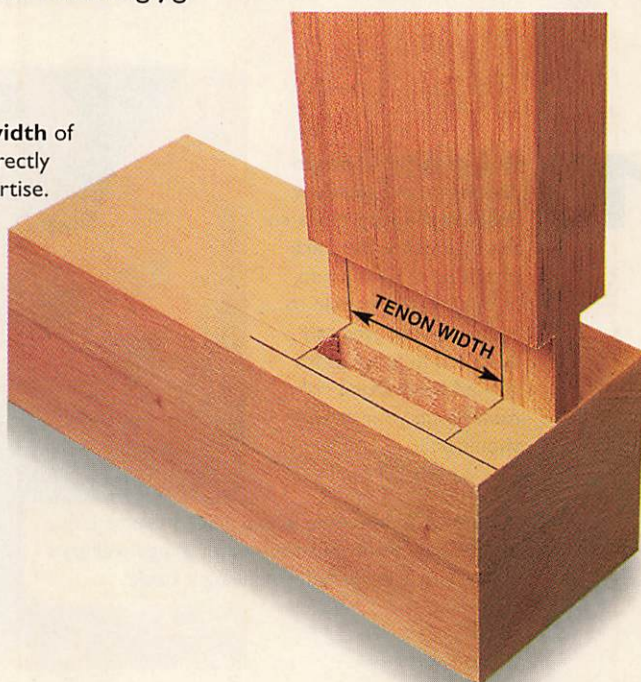There isn't any fussy micro-adjust on this jig. Simply nudge the fence with your fist.



Raise the blade about 1/32-in. lower than the shoulder to avoid cutting into it.

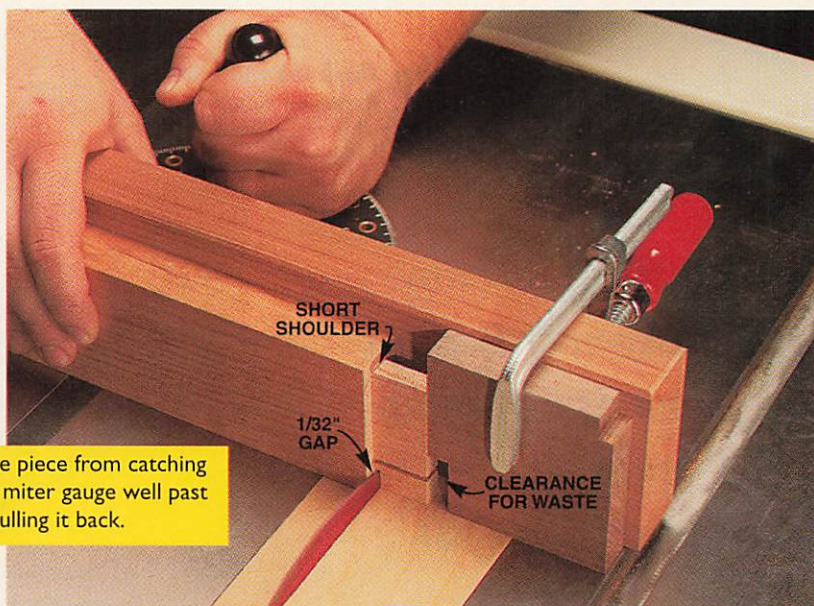
9 Rip the tenon to width. First, move the fence to the left side of the saw blade. Clamp the rail to the right side of the tenoning jig and adjust the fence until the blade lines up with the marks.

CUT THE SHORT SHOULDERS


Sawing all four shoulders flush isn't realistic. Don't push your luck! Finish them with a sharp chisel.

- 10** Rough cut the waste pieces on the tablesaw. Position the stop block so the short shoulders are proud by 1/32-in. or so. In theory, it's possible to make this cut precisely flush, but in practice it's darned hard. Don't risk messing up your crisp shoulders!

Caution: To keep the waste piece from catching on the saw blade, push the miter gauge well past the blade before pulling it back.




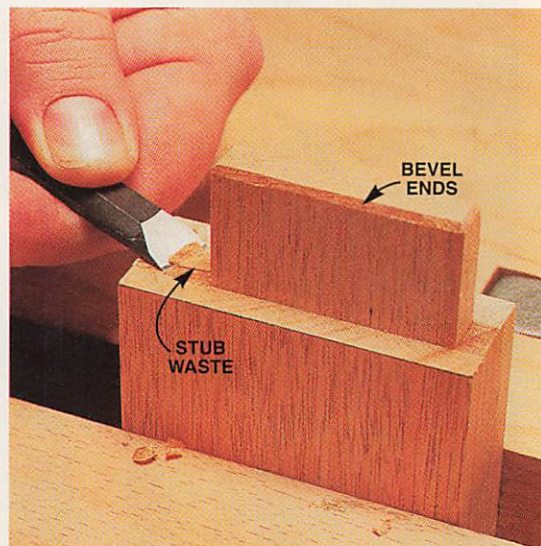- 11** Remove the stub waste with a chisel. This paring requires a keen edge, but if you cut too deep, it won't show. Bevel the ends of the tenon with a file so it will easily fit in the mortise.



- 12** Test the fit. If your tenon is too wide to fit into the mortise, it's easy to go back and trim off one side with the tenoning jig. If it's too loose, glue the waste pieces back on and cut again.

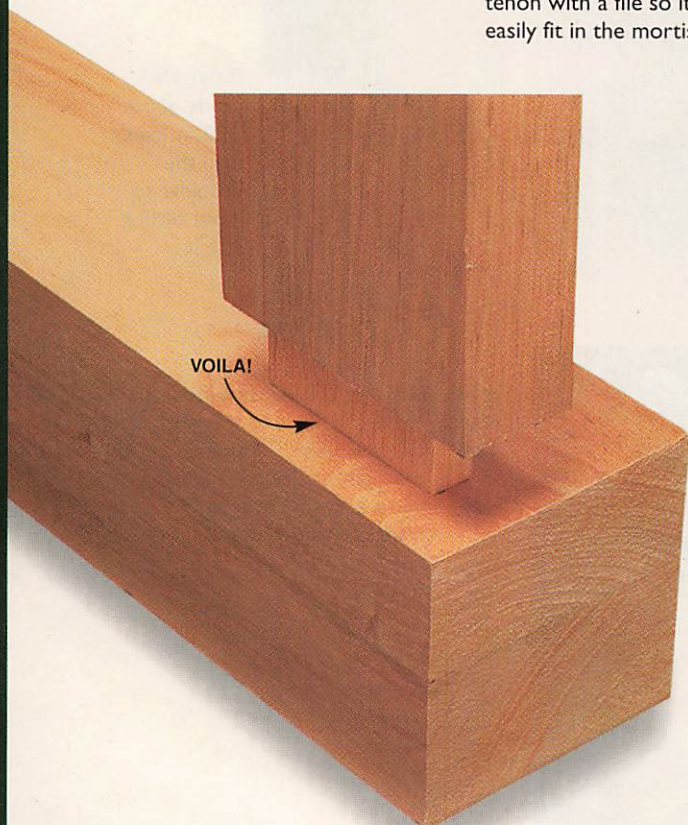AW



Create Your Own Outdoor Room...In Just Seconds!



NEW! Motorized Model Now Available!

**LOW
Factory
Direct
Prices!**

Introducing The Revolutionary SunSetter® Retractable Awning!

If you're tired of having your outdoor enjoyment rained on...baked out...or just plain ruined by unpredictable weather.

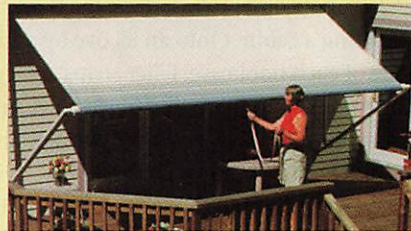
At last there is a solution! One that lets you take control of the weather on your deck or patio! It's the incredible SunSetter® Retractable Awning! A simple...easy-to-use...& *affordable* way to outsmart the weather and start enjoying your deck or patio more...*rain or shine!*

The SunSetter® is like adding a whole extra *outdoor room* to your home... giving you instant protection from glaring sun...or sudden showers! Plus it's incredibly easy to use...opening & closing effortlessly in *less than 30 seconds!*

So, stop struggling with the weather... & start enjoying your deck or patio more!

**Call for a FREE Catalog & Video!
1-800-876-8060 Ext. #8420**

**Opens & Closes In
Less Than 30 Seconds!**



Just pull on the handy strap & your SunSetter® unrolls effortlessly!



You choose full sun, partial shade or total protection in just seconds!



**FREE!
Catalog
& Video**

**FREE Catalog & Video
Call Toll-Free: 1-800-876-8060 Ext. 8420**

☒ **Yes!** Please send your FREE Catalog & Video...including Special Savings now in effect...TODAY!

Name

Address

City State Zip

E-Mail (if we may contact you via e-mail)

SunSetter®
RETRACTABLE AWNINGS

184 Charles Street, Dept. 8420
Malden, MA 02148

Ext. 8420

©2001, SunSetter® Products

Craftsman-Style

by David Radtke

Bookcases

Enhance your home with this built-in classic.

The Craftsman architectural movement of the early 20th century is enjoying a resurgence in popularity both in furniture design and home accessories. These bookcases and fireplace surround reflect that tradition.

If you can build a basic box with a face frame, then you can build this project. The tapered columns that showcase the hearth and buttress the bookcases present the greatest challenge. We'll show you a couple nifty jigs that make even that process seem easy.

When it comes to installing the bookcases, we solved the age-old problem of fitting a cabinet into an alcove by adding a 3-in. filler strip to the outside stile of each bookcase. Filler strips are a great way to bridge the gap between the cabinet and the wall. They're easy to install and they look great. You put the strips on at the very end; sawing, planing and sanding to a perfect fit. The result? The bookcase and mantel look as if the house were built around them!

We used quarter and rift-sawn oak—both solid and veneer plywood—for this project. This wood is a hallmark of the Craftsman style.

This project was designed for fireplaces that have a drywall or plaster enclosure, similar to the one shown here. The mantel portion of the design doesn't lend itself well to a brick fireplace.

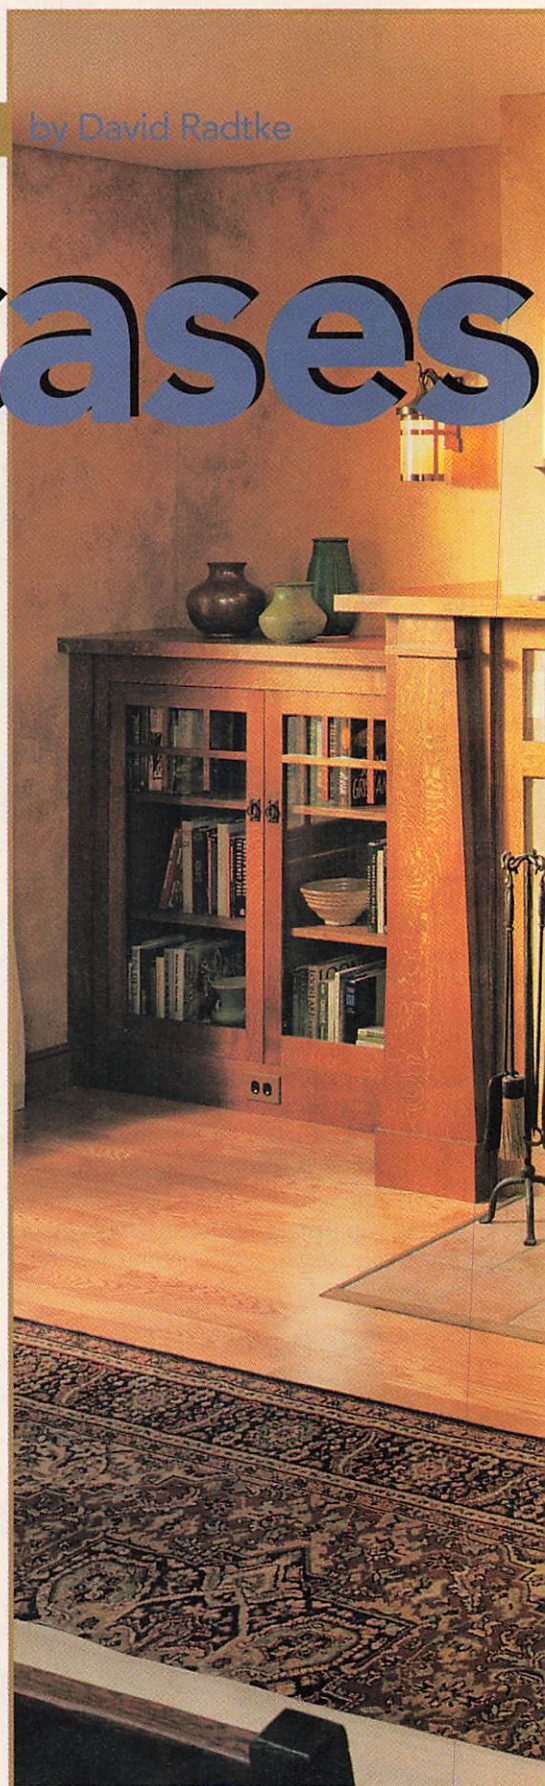
The wood dividers (or muntins) at the top of the bookcase door frames are not "true" muntins. They don't frame individual panes of glass, but rather slip over a single pane. It's less authentic, but a lot easier.

This is a big project and is best approached in phases. The mantel and fireplace surround comprise the first phase. The two bookcases can be handled later.


You'll need a tablesaw, bandsaw, planer, biscuit joiner (a pocket-screw or doweling jig will also work) and a router with a flush-trim bit. A compressor and a finish nailer make installation a whole lot easier. In the end, expect to spend around \$2,000 for the entire project.


Getting Started

Start by measuring the fireplace projection and the area on each side of the fireplace. Our design is configured for the specific space shown in Fig. C. To allow room for the columns, we widened the mantel to extend beyond the original fireplace projection. You'll no doubt have to alter our plan to suit your




and Mantel

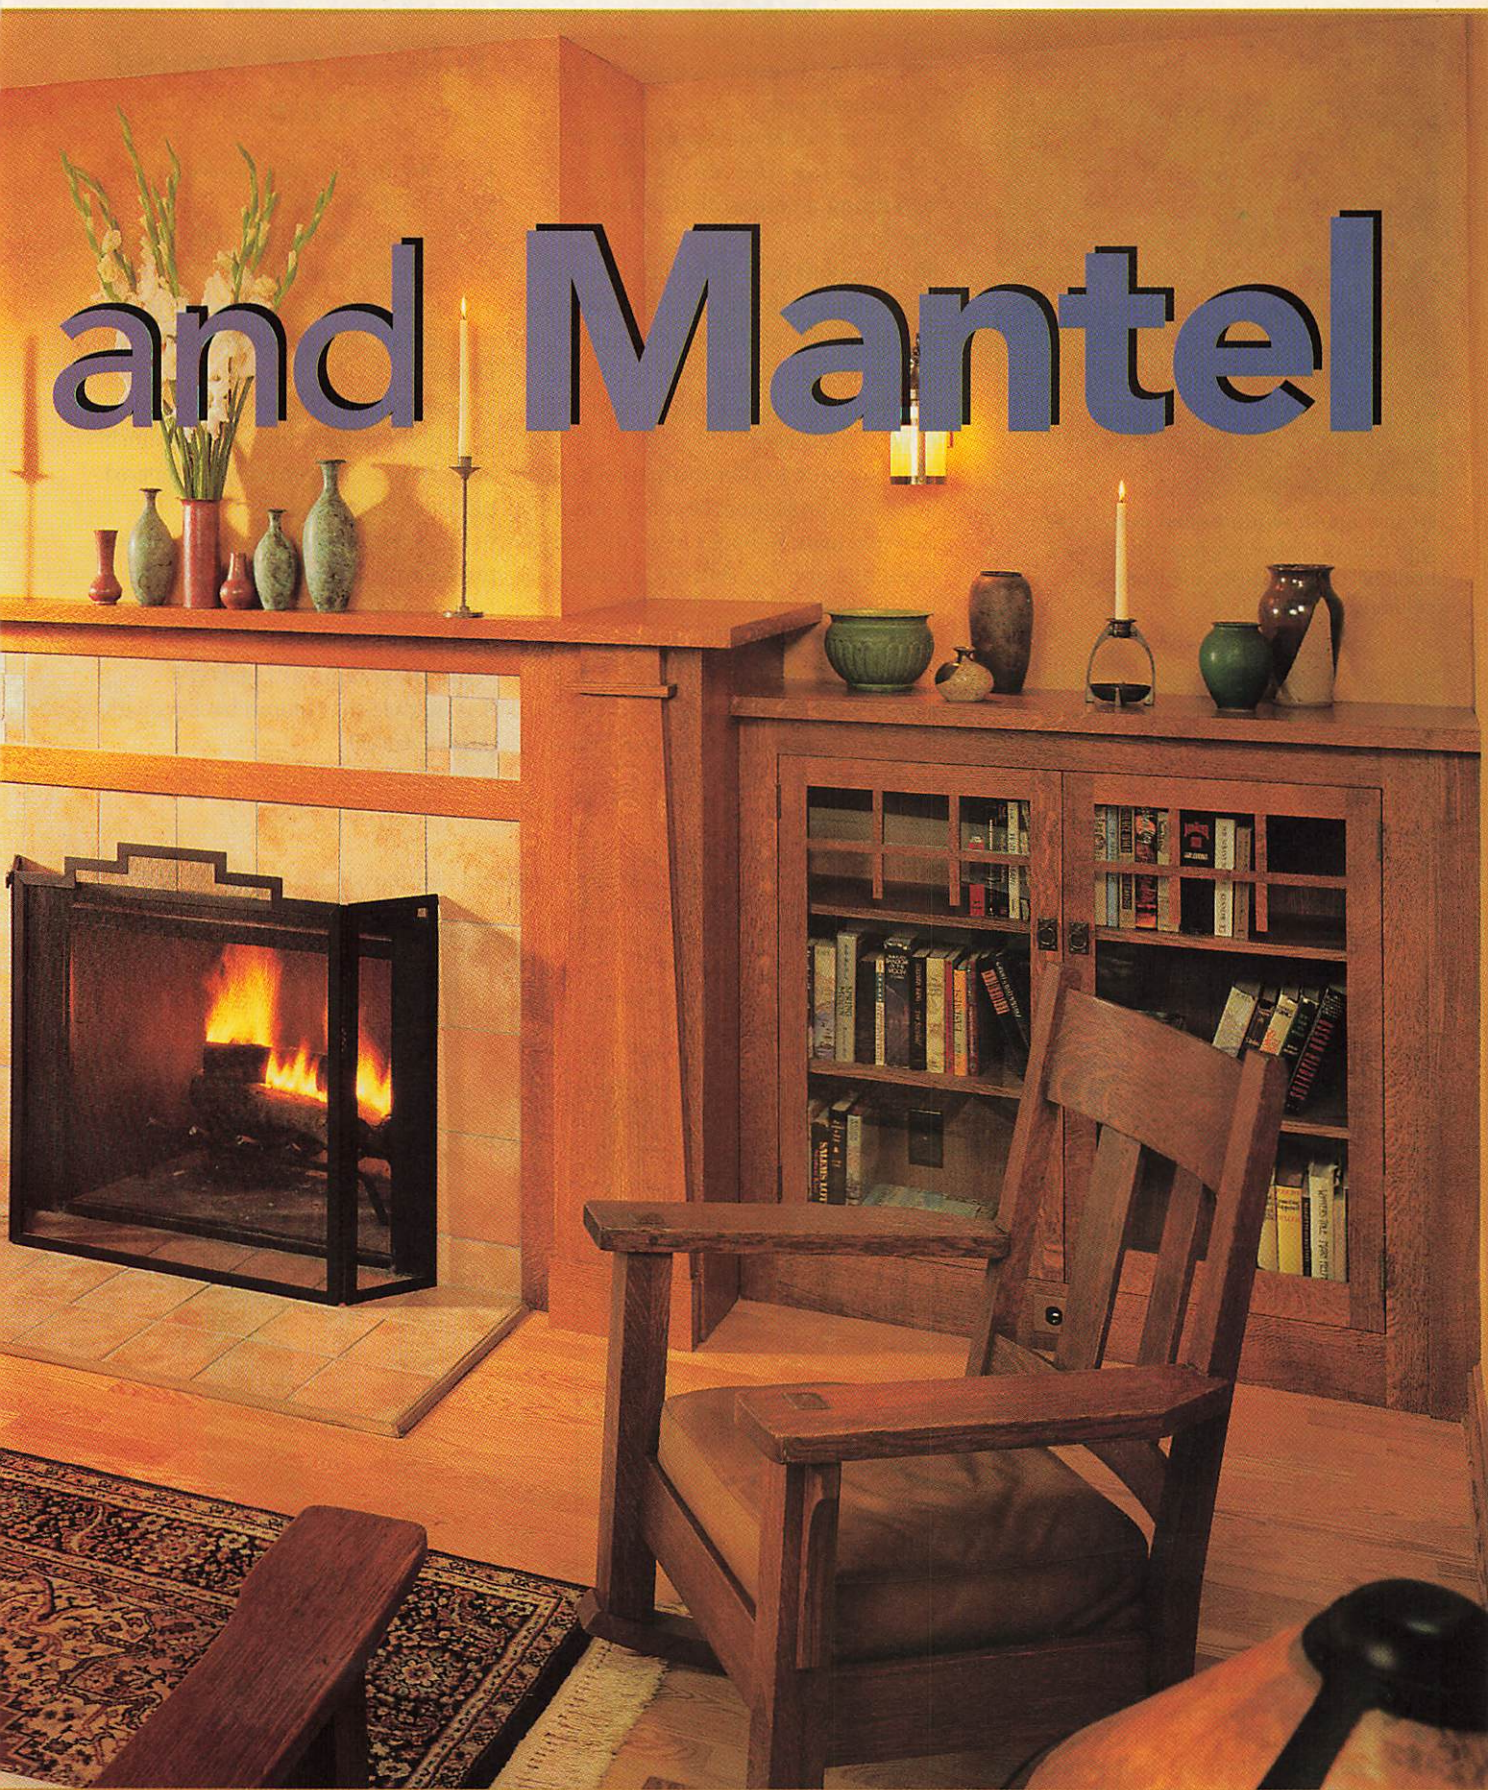

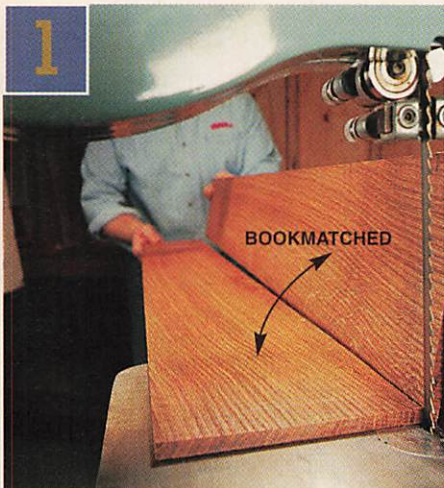

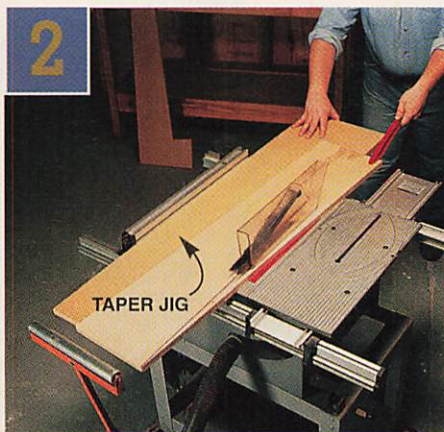1 Resaw a 6-in.-wide board in half, then glue the two halves together to create a bookmatched panel for the front of the columns.



2 Cut the tapered plywood on a tablesaw using two simple tapering jigs (Fig. A). Glue solid oak sides to the column.



3 Glue the bookmatched oak panel to the tapered plywood. Then cut the excess on the bandsaw leaving a 1/16-in. overhang on the sides. Trim the facing flush to the sides with a router and a flush-trim bit.

own room. Here are a couple of things to keep in mind:

■ You can widen the bookcases without making the doors too big by adding a center divider between the doors.

■ If you don't have walls at the cabinet ends, attach oak plywood end panels similar to the wall returns (parts L). Extend the cabinet tops (parts U1) and apply additional banding to cover the edge of the return.

■ If you need to alter the mantel to fit a different projection, be sure to maintain adequate setbacks from the fireplace opening (see Safety Considerations, page 79).


■ Have the tiles you're going to use on hand before you build. 8 in. x 8-in. tiles can vary by 1/4-in. and you'll need accurate measurements for making the mantel face frame.


Building the Tapered Columns

1. Resaw oak for the bookmatched panel (N2) (Photo 1).
2. Cut the tapered plywood (M) using the jigs in Fig. A and Photo 2.
3. Glue the oak sides (N1) to the edges of the tapered plywood (Fig. D, Detail 1).
4. Assemble the columns (Photo 3).
5. Trim the ends of the oak sides flush with the top and bottom of the tapered plywood (Photo 4 and 5).
6. Cut a 3-in. section from the top of the column. Then, remove a 5/8-in.-wide strip to make room for the 3/4-in. astragal (P) (Photo 5).
7. Cut the column astragals (P).
8. Assemble the column backers with parts C and D.
9. Assemble the mitered column base

Fig. A Tapering Jigs

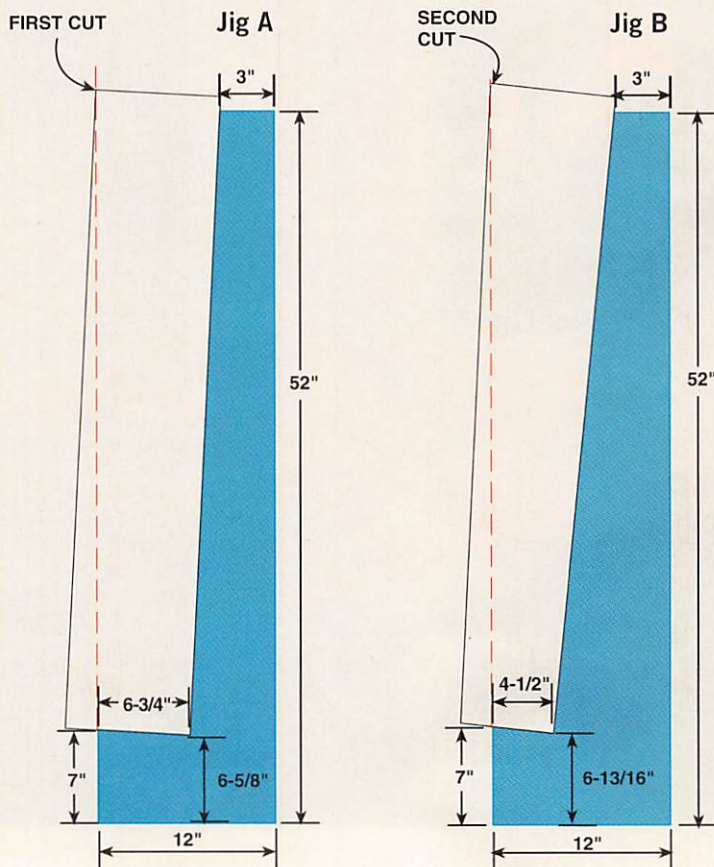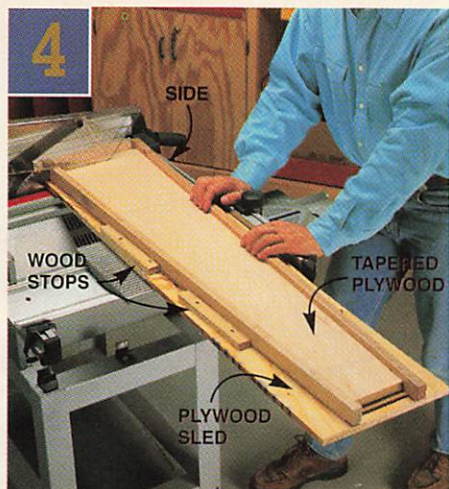Build two jigs to cut the tapered plywood. Cut the notches in each jig with a bandsaw or jigsaw. Use Jig A. to make the first cut. Then flip the plywood over and cut the second taper using Jig B.






Trim the oak sides flush with the bottom of the tapered plywood. Make a 3/4 in. x 12 in. x 48 in. plywood sled with wood stops to center the column. Add a long fence to your miter gauge and use it to guide the sled through the saw.



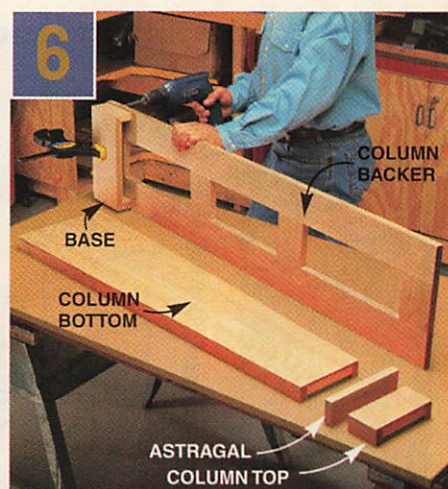Cut the column top, then remove an additional 5/8-in. section to make room for the astragal (see Photo 6). The 5/8-in. strip, plus the 1/8-in. saw kerf create a 3/4-in. gap that gets filled by the astragal.



Screw the column parts on the column backer starting with the base and working up. Drill pilot holes and screw them in place from behind.

fronts and sides (parts Q and R) with glue and nails.

10. Attach the column base, bottom, astragal and top to the column backer (Photo 6).

11. Join parts A and B to create the mantel face frame. Position the lower rail to accommodate the tile you've chosen. (We used 8 in. x 8-in. tiles. The actual size will vary.)

12. Assemble the mantel wall returns by screwing the cleats

(K1 and K2) to the wall returns (L).

13. Make the built-up mantel top by gluing the bottoms and underlayment (T2 and T3) to the top (T1).

14. Glue 1/4-in.-thick edge banding (S) to the outside edges. Be sure to miter the outside corners of the edge banding.

For safety and convenience, don't overlook these items when planning and installing your project:

- ✓ Fire codes generally require that 3/4-in.-thick wood be kept 6 in. away from the edge of a fireplace opening to prevent radiant heat from scorching it. For wood that protrudes 1-1/2 in. or more, such as the front columns of this project, the wood must be at least 12 in. away from the fireplace opening.


- ✓ Use thin-set mortar to apply the new tile or stone around the fireplace front and hearth.

- ✓ You must put electrical receptacle box extenders on any electrical boxes that end up behind the cabinet. Don't be tempted to remove the covers and bury the receptacles in the wall. This would violate electrical codes. The extender slips over the receptacle,

Safety Considerations

Fig. B. Outlet Extender

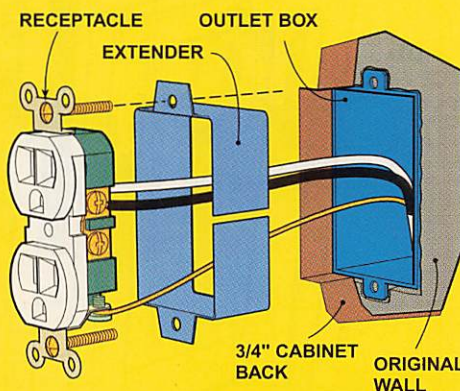Outlet extenders allow you to safely extend wall outlets through the cabinet back.



extends inside the box and covers the cut-out in the plywood backs of the cabinets, as shown here. You can find box extenders at electrical supply retailers and home centers. Be sure to shut off the power to the box you're working on.

- ✓ You'll probably want to install new electrical receptacles in the cabinet bases or in the floor to make up for the receptacles left inside the cabinets. Hire a licensed electrician to do the job.

- ✓ The glass in the bookcase doors must be either safety glass (plastic film between two thin layers of glass) or tempered glass. This reduces the danger of injury from broken glass. Both types are more expensive than regular glass, and require professional cutting.

Fig. C Bookcase and Mantel Assembly


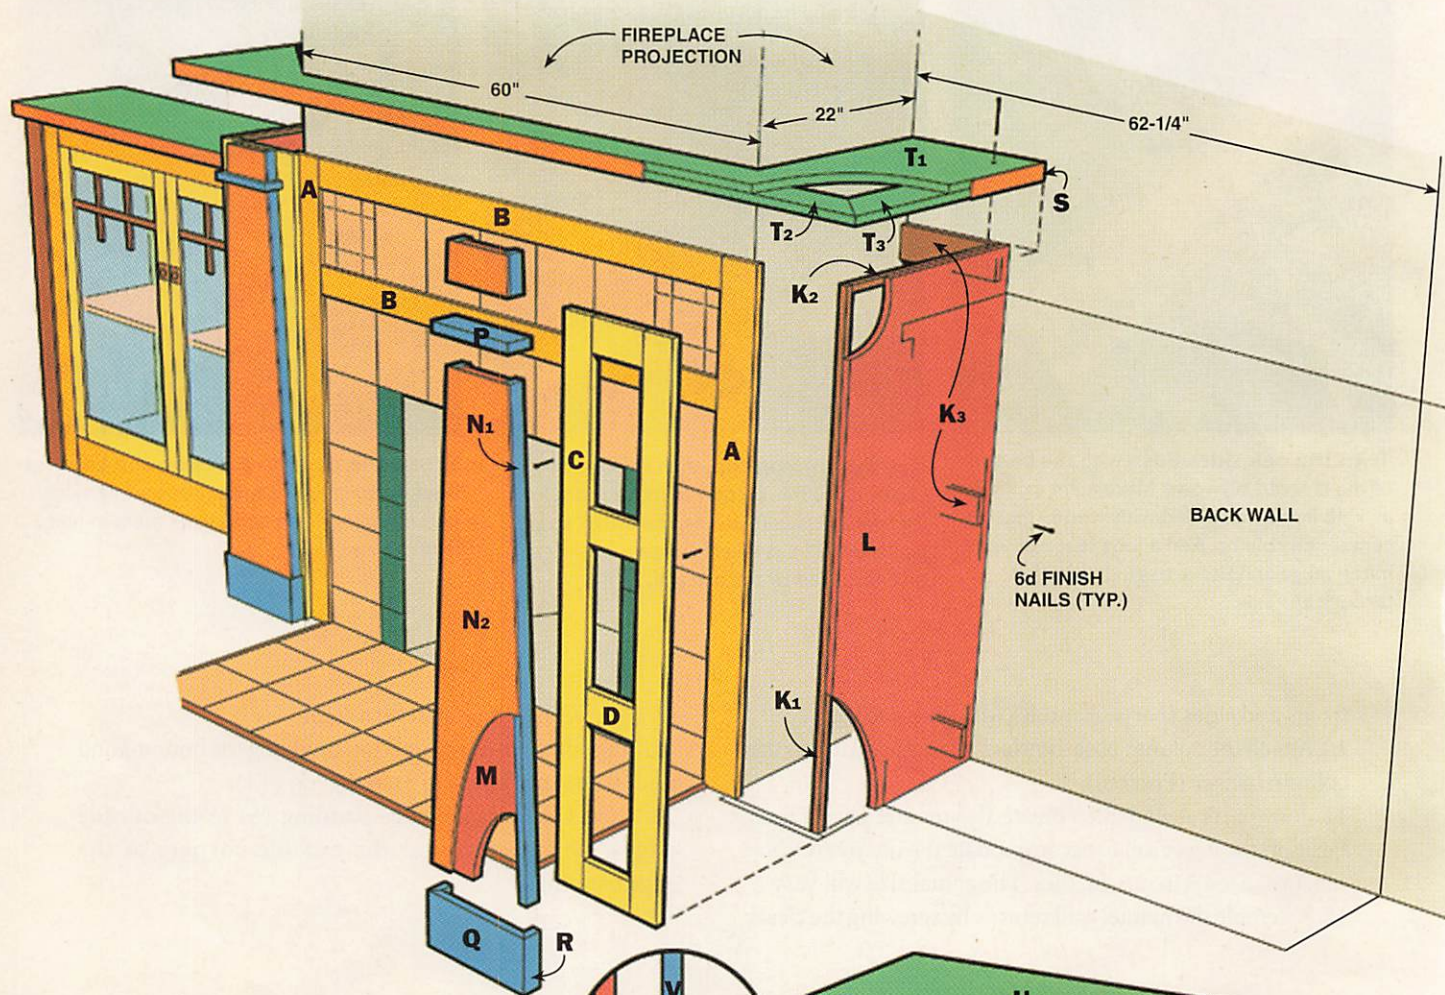


Fig. D Column

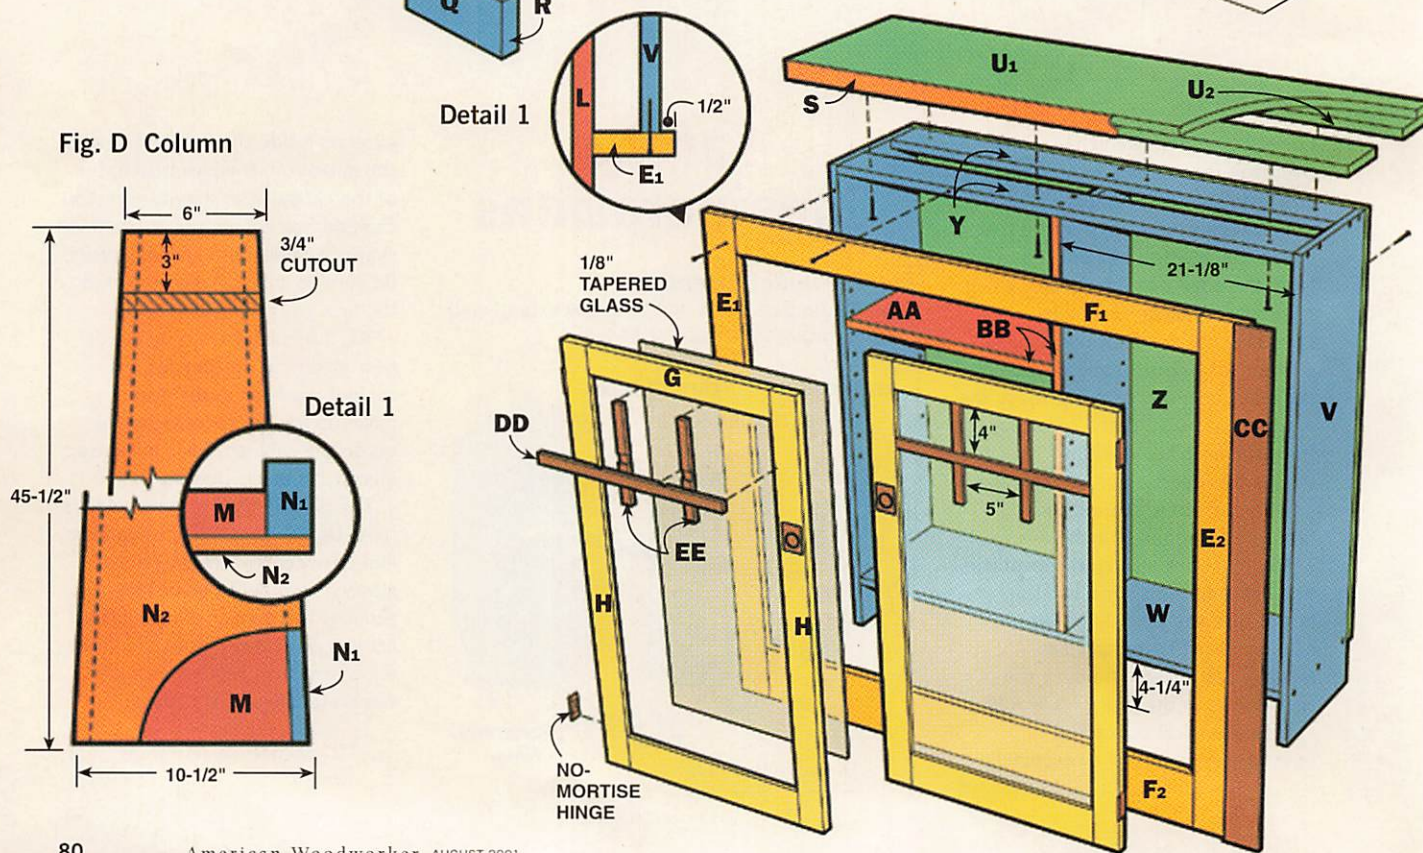

Building the Bookcases

1. Assemble the bookcases (parts V through Z) using 2-in. wood screws (Photo 7). Then, drill holes for the adjustable shelves.
2. Glue and clamp the face frames to each cabinet.
3. Biscuit or dowel the door frames together.
4. Rabbet the doors for the glass panels (Photo 8) and add the glass retainers.
5. Mount the doors to the bookcases using no-mortise hinges (see Sources, page 83).
6. Make half-lap joints for the muntins on your tablesaw and assemble with a drop of glue.
7. Build-up and edge-band the bookcase tops in the same manner as the mantel top.
8. Cut and edge-band the shelves.

Fig. E. Mantel Installation

Screw the columns to the face frame and the wall returns to the columns. Slide the whole assembly against the wall and nail the wall returns to the wall cleats and the face frame to the fireplace projection.



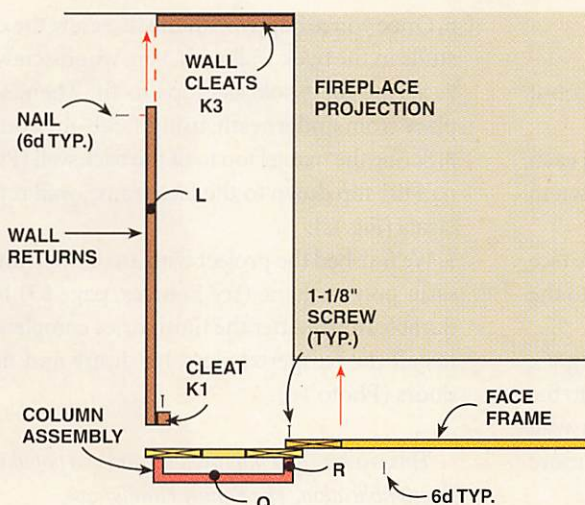
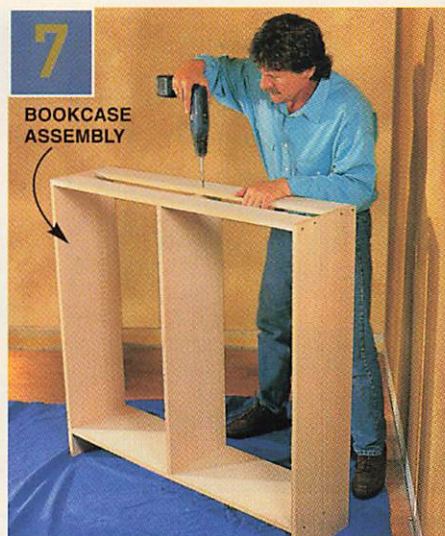


Fig. F. Cutting Diagrams

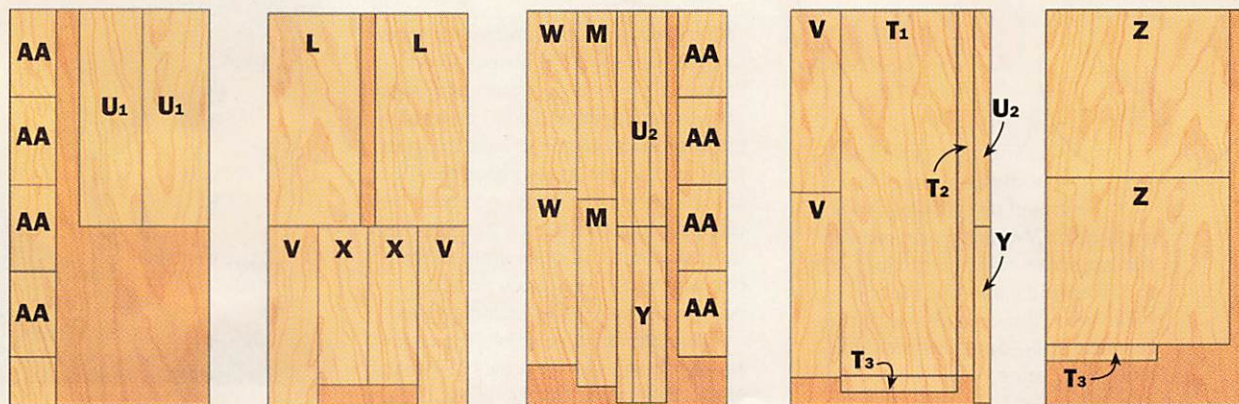

Screw the cabinet boxes together.

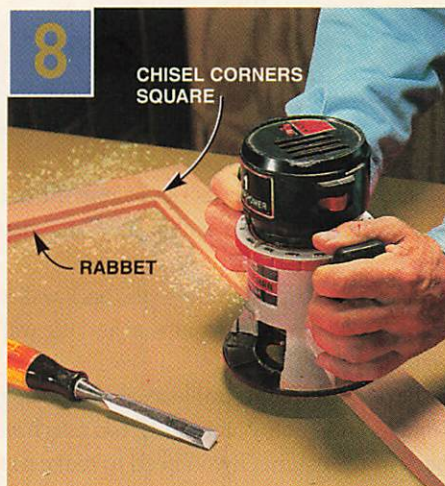Attach the backs using screws every 6 in. The cabinet backs will "square up" the boxes and strengthen them.



Route the rabbets for the glass panels and square the corners with a chisel.

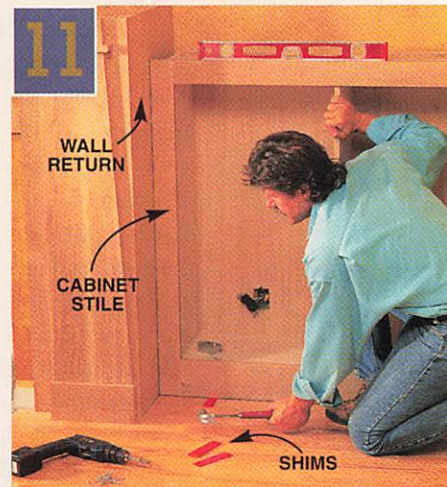
Note: Have the glass cut 1/8 in. less than the rabbet width and height to insure a good fit.



Remove old tile, mantel and baseboard from the fireplace opening. The new tile is installed after the woodworking, staining and varnish are completed.



Screw the column assemblies to the fireplace face frame. Prop the face-frame against the fireplace projection to make the job easier. Screw the plywood wall returns through the cleats to the column assembly from the inside (see Fig. E).



Level each cabinet with shims. Then, scribe and plane the cabinet stile for a good fit against the wall return (Fig. C, Detail 1). Cover any gaps along the floor with trim molding (FF).

Installation

1. Prepare the room for installation (Photo 9).
2. Assemble the mantel with 1-1/4-in. wood screws but leave the top off for now (Photo 10).
3. Screw three wall cleats (K3) along the back wall on each side of the fireplace to anchor the wall returns, as shown in Fig. E.
4. Push the entire assembly to the back wall and nail the face frame to the fireplace front wall and the wall returns to the wall cleats (Fig. E).
5. Level and fit the bookcases in the openings (Fig. C, Detail 1 and Photos 11 and 12). You may have to cut into the back of the cabinet if you need to make room for any wall receptacles. (See Safety Considerations, page 79 for more information.)

6. Once you're happy with the fit, screw the cabinets to the studs in the back wall with 3-in. wood screws.
7. Scribe the bookcase tops to fit. Then, screw them in place from underneath, using 1-5/8-in. wood screws.
8. Scribe the mantel top to fit the back wall (Photo 13). Then nail the top down to the face frame, wall returns and wall cleats (Fig. C).
9. We finished the project with an oil stain and two coats of satin polyurethane (see Sources, page 83) for a deep and durable finish. After the finish dries completely (48 hours), install the tempered glass, hardware and muntins in the doors (Photo 14).

This is a new and improved version of a popular story from our sister publication, The Family Handyman.



Oops!

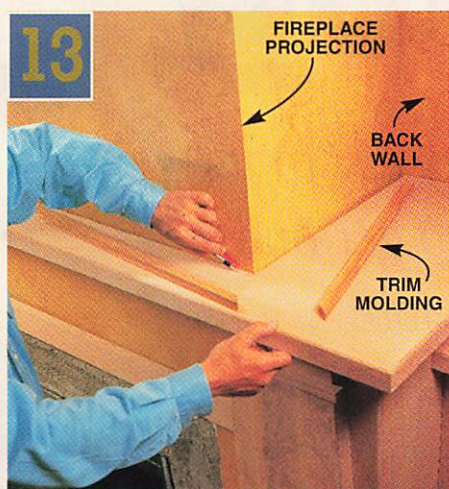
The tops of these bookcases must be installed by screwing from underneath. Wouldn't you know it, the last screw to finish the job went too deep and came out the top. Next time I'll take it easy with the cordless drill—but this time I was faced with some repair work.

After backing out the offending screw, I carefully pushed the broken fibers back into place using a drop of glue to hold things together. Then I clamped a block of wood over the area to flatten the repair. I used some paper towels to absorb the squeeze-out under the clamping block. This kept the glue from spreading into the open grain of the oak where it would show up as a permanent mark after staining. Once the glue was dry I removed the clamp and lightly sanded the area. Now that nasty little hole is barely visible.






Hold the filler strip in place and scribe to fit the adjacent wall. Then, nail the strip onto the cabinet stile.



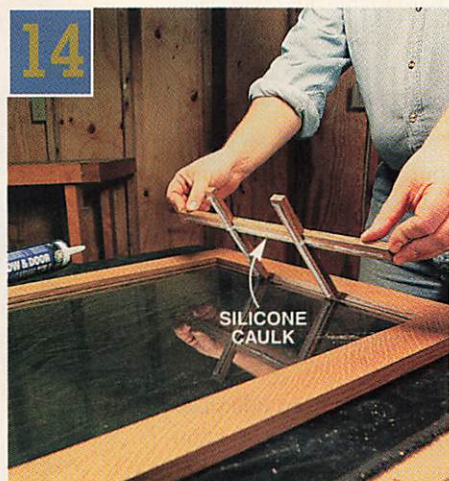Scribe the top for a tight fit against the back wall. Then cover any gaps along the fireplace projection with trim molding (FF).



Secure the muntins to the glass with silicone caulk after the finish is dry. AW

CUTTING LIST

| Part | Name | Qty. | Dimensions | Material |
|------|----------------------------|--------|--------------------------|------------------|
| A | fireplace stiles | 2 | 3/4" x 4" x 50-1/2" | oak |
| B | fireplace rails | 2 | 3/4" x 3" x 54" | oak |
| C | column backer stiles | 4 | 3/4" x 4" x 50-1/2" | oak |
| D | column backer rails | 8 | 3/4" x 4" x 3-1/2" | oak |
| E1 | cabinet stiles | 2 | 3/4" x 3" x 44-1/2" | oak |
| E2 | cabinet stiles | 2 | 3/4" x 4" x 44-1/2" | oak |
| F1 | cabinet upper rails | 2 | 3/4" x 3" x 42" | oak |
| F2 | cabinet lower rails | 2 | 3/4" x 5" x 42" | oak |
| G | upper door rails | 4 | 3/4" x 2-1/4" x 16-7/16" | oak |
| H | door stiles | 8 | 3/4" x 2-1/4" x 36-7/16" | oak |
| J | lower door rails | 4 | 3/4" x 3" x 16-7/16" | oak |
| K1 | cleats | 2 | 3/4" x 3/4" x 50-1/2" | pine |
| K2 | cleats | 2 | 3/4" x 3/4" x 21-1/4" | pine |
| K3 | wall cleats | 6 | 3/4" x 3-1/2" x 10" | pine |
| L | wall returns | 2 | 3/4" x 22-3/4" x 50-1/2" | oak plywood |
| M | taper-cut plywood | 2 | 3/4" x 9-1/2" x 45-1/2" | plywood |
| N1 | column sides | 4 | 3/4" x 1-1/4" x 48" | oak |
| N2 | column faces | 2 | 1/4" x 11" x 46-1/2" | oak; trim to fit |
| P | column astragals | 2 | 3/4" x 2-1/4" x 7-7/8" | oak |
| Q | column base fronts | 2 | 3/4" x 5" x 11" | oak |
| R | column base sides | 4 | 3/4" x 5" x 1-3/4" | oak |
| S | top edge banding | 22 ft. | 1/4" x 1-1/2" | oak |
| T1 | mantel top | 1 | 3/4" x 26-3/4" x 88-1/2" | oak plywood |
| T2 | mantel underlayment front | 1 | 3/4" x 4" x 88-1/2" | oak plywood |
| T3 | mantel underlayment sides | 2 | 3/4" x 4" x 26-3/4" | oak plywood |
| U1 | cabinet tops | 2 | 3/4" x 15-1/4" x 52" | oak plywood |
| U2 | cabinet top underlayment | 4 | 3/4" x 4" x 52" | oak plywood |
| V | cabinet sides | 4 | 3/4" x 12" x 44-1/2" | oak plywood |
| W | cabinet bottoms | 2 | 3/4" x 12" x 43" | oak plywood |
| X | partitions | 2 | 3/4" x 11-3/4" x 38-3/4" | oak plywood |
| Y | cabinet top strips | 4 | 3/4" x 4" x 43" | oak plywood |
| Z | cabinet backs | 2 | 3/4" x 44-1/2" x 40-1/2" | oak plywood |
| AA | unfaced shelves | 8 | 3/4" x 11-5/8" x 21" | oak plywood |
| BB | shelf and partition facing | 30 ft. | 1/4" x 3/4" | oak |
| CC | filler strips | 2 | 3/8" x 3" x 44-1/2" | oak |
| DD | horizontal muntins | 4 | 3/8" x 3/4" x 16-7/16" | oak |
| EE | vertical muntins | 8 | 3/8" x 3/4" x 8" | oak |
| FF | trim | 20 ft. | 1/2" x 3/4" | oak |

Sources

Steve Wall Lumber Co., (800) 633-4062, www.walllumber.com
60 bd. ft. FAS quarter-sawn white oak, (\$4.50 per bd. ft., plus s&h) and five 3/4" x 4x8 B-2 grade rift-sawn white oak plywood (\$70 per sheet, plus s&h).

The Home Depot
One 1x6 x 8' No. 2 pine,
Two qts. Minwax Early American No. 230 oil stain,
One gal. Minwax satin polyurethane.

Woodworkers' Hardware, (800) 383-0130
16 glass retainers, #EZ004; 35 cents each,
4 door magnets, part #A09798V;
\$2.50 each,
48 1/4-in. shelf pins, #HB86C25;
10 cents each,
8 no-mortise hinges, #A03175TB DAE;
\$3 each.

Van Dyke's Restorers, (800) 558-1234
4 door pulls, #CG-02004761; \$39 each.

Tool Test

Bandsa

For Resawing



Resawing can push a bandsaw to its limits, so it's important to get one that can handle the job.

Bandsaws are well known for their ability to cut curves, but they can also perform the unique function of wide resawing. The ability to resaw can add a whole new dimension to your woodworking. You can save money by making your own thin lumber, or produce bookmatched panels (Photo 3). With the right machine you can even make your own lumber (Photo 2)!

One of the questions we hear most often from woodworkers shopping for a bandsaw is, "How will it perform for resawing?" We focused this test in response to that question.

Our test concentrated on bandsaws that have a resaw capacity of 9 in. to 12 in. and are priced between \$350 and \$1,350. Within this field we found 17 machines; ten 14 in., one 16 in., and six 18-in. Among the 14-in. bandsaws, we included only those that could saw 9 in. or greater or had a riser block kit available. A riser block (Photo 1) typically adds 6 in. to the resaw capacity, giving most 14-in. bandsaws 12-in. resaw capacity. At \$50 to \$100, a riser block kit is an inexpensive way to gain that extra resaw height.

To test the saws, we resawed 8-in.-wide hard maple and 8-in.-wide pine boards. We used new 3/4-in.-wide blades. We pushed the machines pretty hard to get some separation between those that could cut it and those that couldn't. For those that did well, we pushed even harder using hard maple boards as wide as 12 in.

Resawing Needs Power

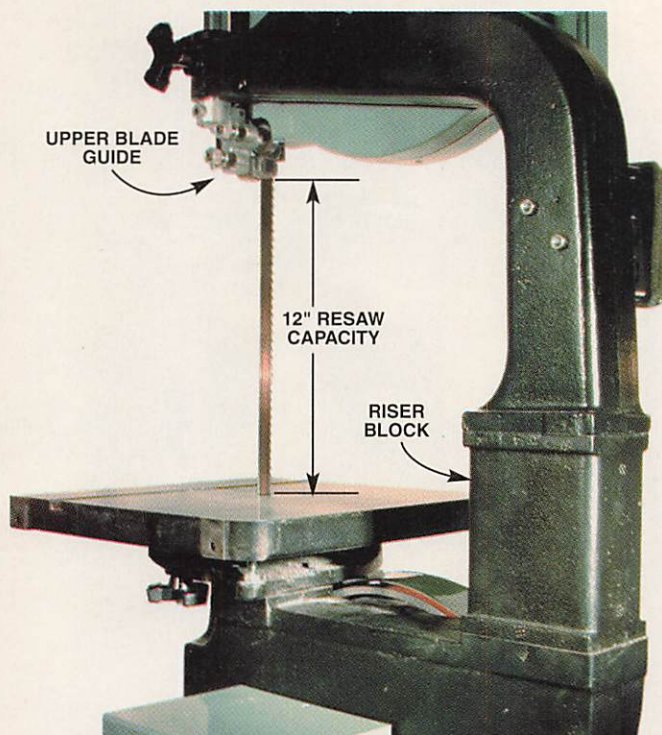
Power is the biggest factor affecting a bandsaw's ability to resaw. Machines in our test group had ratings from 3/4 to 2 hp (Fig. A). We found that 1 hp is the minimum needed for resawing. You can resaw on the 3/4-hp machines, but they are slow and likely to test your patience. (See Workshop Tips, Easier Resawing, page 23, for a way to deal with an under-powered bandsaw.)

Power is important, but you also need adequate blade speed. Machines with blade speeds of 3,000 sfpm (surface feet per minute) or higher performed best. Some machines have multiple speeds, but this is not an advantage because these speeds are well below 3,000 sfpm and easily bogged down.

By Randy Johnson

WS






A riser block can be installed on some 14-in. bandsaws. It's an inexpensive way to increase their resaw capacity from 6 to 12 in.



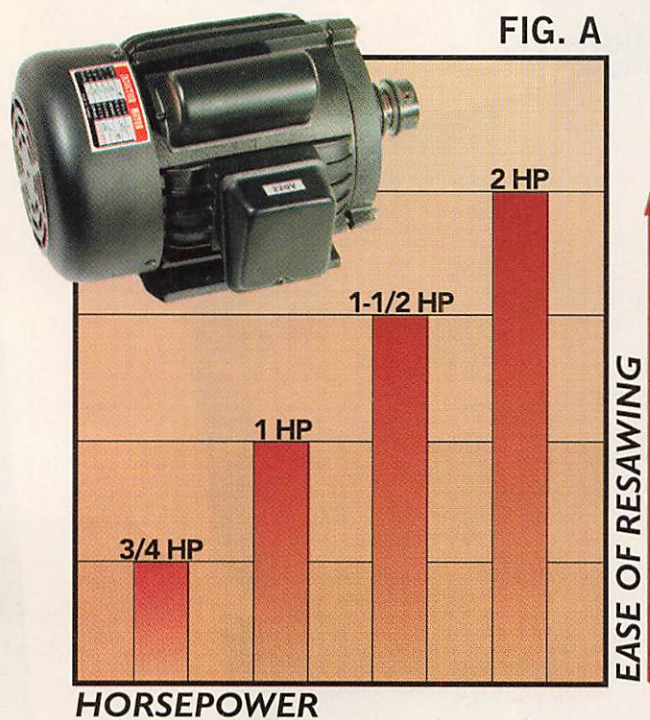2 Twelve-inch capacity is particularly useful if you plan to make lumber from logs with your bandsaw.



Power is important when it comes to resawing. We tested bandsaws with 3/4- to 2-hp. motors. We found that 1 hp. is a minimum requirement for wide resawing in hard wood. A 3/4-hp saw will cut but may test your patience.

Resaw Capacity - You May Not Need the Maximum

Resaw capacity is measured by the amount of space under a fully raised upper blade guide (Photo 1). How much capacity you need depends on the kind of work you plan to do. If you're making lumber from logs, a machine with 12-in. capacity is best. If you want to make bookmatched panels for cabinet doors, a machine with 9-in. capacity is probably enough. That's because two 9-in. panels glued together, plus 4 in. for two side stiles, equals a 22-in.-wide door.

A Rigid Frame and Sturdy Base are Best

The heavy demand resawing puts on a bandsaw can create machine vibration, blade chatter and even frame flexing. These problems can, in turn, result in rough and uneven cutting.

We found two features that helped minimize these problems; frame style and base style. There are two distinct frame styles;



A FRESH SHARP BLADE IS CRITICALLY IMPORTANT WHEN RESAWING.

3 **Bookmatching** lumber with unusual grain patterns is one of the many wonderful applications of resawing. Once resawn, the two parts can be glued together and used as a decorative door or cabinet panel.

welded-steel and cast-iron (Photo 4). All of the welded-steel frame machines had a very solid feel during resawing and did a good job of dampening vibration under a heavy resaw load. Among the cast-iron frame machines, the Delta and Enco resisted vibration best.

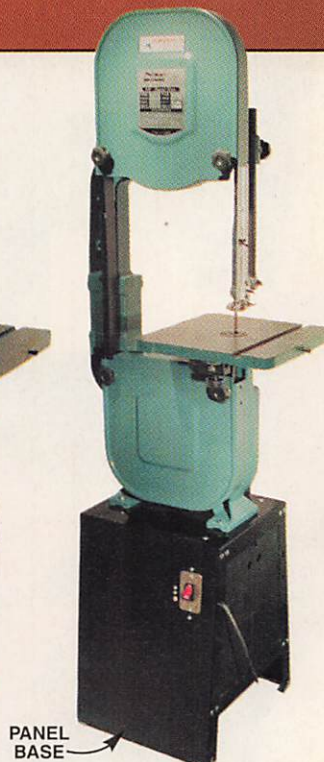
A sturdy base also helps dampen vibrations. For this reason we favor the closed- and the floor-base styles over the panel- and open-base models (Photo 5).

Resawing Requires the Right Blade

It's very important to use a blade that's fresh and sharp when resawing. If you don't, you're likely to get excessive blade wander, chatter and a slow feed rate. The width of the blade is also important. A 3/4 in. to 1-in.-wide blade with 3 to 4 tpi (teeth per inch) is a good choice. (For more information on bandsaw blades, look for our Bandsaw Blade Tool Test in the next issue of American Woodworker.)



4 **Two frame styles.** During heavy resawing the welded-steel frame (right) resists vibration better than most of the bandsaws with cast-iron frames (left).



5 A sturdy base helps to dampen vibration during heavy resawing. Closed and floor-style bases do the best job.

Bandsaws with riser blocks

Bandsaws without riser blocks

| Manufacturer | Price w/out shipping | HP | Volts | Amps | Blade Speed(s) SFPM | Resaw Capacity | Frame Style | Base Design | Dust Collection |
|--------------------|----------------------|-------|---------|---------|--------------------------|----------------|--------------|-------------|--|
| Delta 28-275 | \$710 | 3/4 | 115 | 9 | 3,000 | 12" | Cast-Iron | Open | Fair, 1-1/2" port under table |
| Delta 28-280 | \$790 | 1 | 115/230 | 9.6/4.8 | 3,000 | 12" | Cast-Iron | Closed | Fair, 1-1/2" port under table |
| Grizzly G1019 | \$355 | 3/4 | 115/230 | 12/6 | 3,300 | 10" | Cast-Iron | Paneled | Fair*, 2-1/4" port under table |
| Grizzly G1019Z | \$375 | 1 | 110/220 | 12/6 | 3,350 | 10" | Cast-Iron | Open | Good, 1-1/2" port behind lower wheel |
| Jet JW14CS | \$650 | 1 | 115/230 | 10/5 | 3,000 | 12" | Cast-Iron | Closed | Fair*, 2" port under table |
| Jet JW14OS | \$570 | 3/4 | 115/230 | 10/5 | 3,000 | 12" | Cast-Iron | Open | Fair*, 2" port under table |
| North State WA-14M | \$495 | 1 | 110/220 | 15/7.5 | 3,000 | 11" | Cast-Iron | Closed | Good, 4" port in front of lower wheel |
| Reliant DD90 | \$377 | 1 | 115/230 | 9/4.5 | 625; 1,061; 1,683; 2,578 | 12" | Cast-Iron | Paneled | None |
| Ridgid BS1400 | \$559 | 3/4 | 120 | 10 | 2,800 | 12" | Cast-Iron | Open | Fair*, 2-1/4" port under table |
| Enco 199-9090 | \$700 | 2 | 220 | 12 | 3,000 | 8-1/2" | Cast-Iron | Open | Poor, 3/4" port under table |
| Grizzly G4186Z | \$895 | 2 | 110/220 | 14/7 | 3,166 | 10" | Welded-Steel | Floor | Good, 4" port under table |
| Jet JWBS-18 | \$1,099 | 1-1/2 | 115/230 | 16/8 | 3,000 | 10" | Welded-Steel | Floor | Good, 4" port under table on back side |
| Laguna LT16 | \$1,345 | 1-1/2 | 220 | 7.9 | 3,600 | 12" | Welded-Steel | Floor | V. Good, one 4" under table, one 4" behind lower wheel |
| Lobo BSO183 | \$799 | 2 | 110/220 | 24/12 | 2,000; 3,000 | 10-3/4" | Welded-Steel | Floor | Good, 4" port under table, but down near the floor |
| North State WA-18 | \$795 | 2 | 110/220 | 24/12 | 850; 1,000; 1,280 | 10" | Cast-Iron | paneled | Poor, 1-1/4" port behind lower wheel |
| Powermatic 44 | \$600 | 1 | 115/230 | 7/3.5 | 3,000 | 9" | Welded-Steel | open | Good, 3" port behind lower wheel |
| Transpower SB800 | \$602 | 2 | 110/220 | 25/12.5 | 850; 1,000; 1,280 | 10" | Cast-Iron | open | Poor, 1-1/4" port behind lower wheel |

*Dust port steps down in size, reducing air flow.

Dust Collection is a Must

Resawing produces a lot of sawdust so good dust collection is essential. All but one of the machines have some sort of dust port. Some are located under the table, others are found in front or behind the lower wheel (Photo 6). Port sizes vary from 3/4 in. to 4 in. in diameter.


We hooked up a shop vacuum to the machines and found dust collection to be only fair on machines with dust ports less than 2-1/2-in. in diameter. That's because the actual opening on the machine was smaller than the dust port and this restricted air flow. Larger ports on the larger machines worked best when hooked up to a central dust collection system. If your bandsaw lacks adequate dust collection, check out Workshop Tips, "Better Bandsaw Dust Collection," page 16.




6 Good dust collection is important when resawing. The 3-in. diameter rear dust port on this Powermatic provides good air flow and also helps keep the hose out of the operator's way. Several machines had dust ports that could accept a shop vacuum hose but the actual opening behind the dust port on the machine was small and restricted air flow.

| | Guide Style | Front Guard Style | Column-mounted Switch | Hinged Wheel Covers | Easily Accessible Tensioning Knob | Rip Fence | Comments and Source |
|--|--------------|--------------------------------|-----------------------|---------------------|-----------------------------------|-----------|--|
| | Blocks | two-piece | No | Yes | Yes | Optional | Very robust micro adjustment system; front guard awkward to adjust; (800) 438-2486. |
| | Blocks | two-piece | Yes | Yes | Yes | Optional | Very robust micro-adjustment system; front guard awkward to adjust; (800) 438-2486. |
| | Blocks | one-piece | No | Yes | No | Stock | Optional ball-bearing guide available; riser block difficult to install; (800) 523-4777. |
| | Blocks | one-piece | Yes | No | No | Stock | Optional ball-bearing guide available; riser block difficult to install; (800) 523-4777. |
| | Blocks | telescoping | Yes | Yes | Yes | Optional | Lower micro adjustment difficult to access; (800) 274-6848. |
| | Blocks | telescoping | Yes | Yes | Yes | Optional | Lower micro adjustment difficult to access; (800) 274-6848. |
| | Blocks | telescoping | Yes | Yes | Yes | Optional | Lower guides difficult to adjust; LeNeave Machinery; (800) 442-2302. |
| | Blocks | telescoping | No | No | No | Optional | Blade speed insufficient for resawing; Trendlines; (800) 767-9999. |
| | Blocks | telescoping | Yes | Yes | Yes | Optional | Very nice 3/4-hp saw for general bandsawing; (800) 474-3443. |
| | Blocks | one-piece | Yes | No | No | Stock | Double-drive pulleys and belts; (800) 873-3626. |
| | Blocks | one-piece with rack-and-pinion | Yes | Yes | Yes | Stock | Optional ball-bearing guide available; lacks tension gauge; (800) 523-4777. |
| | Euro Guides | one-piece with rack-and-pinion | Yes | Yes | Yes | Stock | Very nice stock rip fence; (800) 274-6848. |
| | Euro Guides | one piece | Yes | Yes | Yes | Stock | Optional nonmetallic guides available; (800) 332-4094. |
| | Blocks | one-piece with rack-and-pinion | Yes | Yes | Yes | Stock | Lacks tension gauge and tension spring, which could lead to blade over-tensioning; (800) 786-3747. |
| | Blocks | one-piece | Yes | No | No | Stock | Blade speed too slow for resawing; LeNeave Machinery; (800) 442-2302. |
| | Ball Bearing | one-piece | Yes | Yes | Yes | Optional | Guides were difficult to adjust; (800) 248-0144. |
| | Blocks | one-piece | Yes | No | No | Stock | Blade speed too slow for resawing; C.P. Tools; (800) 654-7702. |

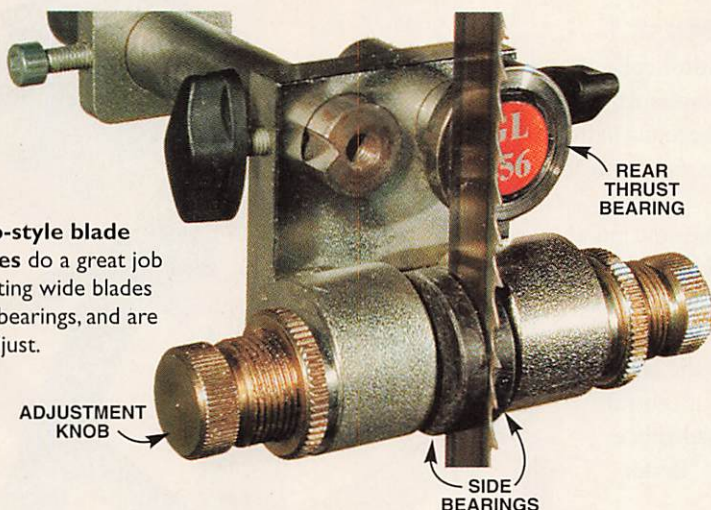
7 Euro-style blade guides do a great job of supporting wide blades with side bearings, and are easy to adjust.



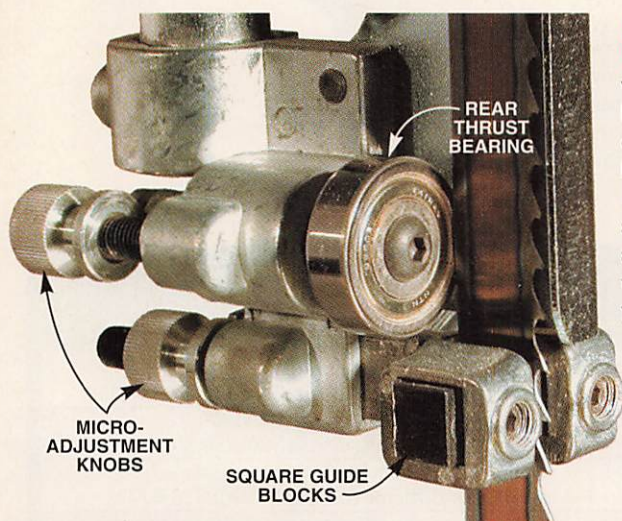8 Square, block-style guides work well for supporting wide blades but are also capable of supporting blades as narrow as 1/16-in. wide. Micro-adjustment knobs are a big help when fine-tuning the position of your guides.



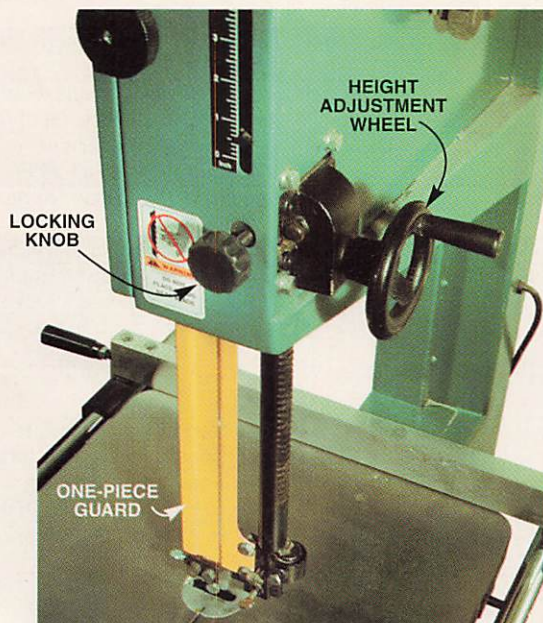9 A one-piece guard system with rack-and-pinion height adjustment makes raising and lowering a simple matter. This set-up also keeps the guard from crashing to the table when the locking knob is loosened.



Other Features

There are four styles of bandsaw blade guides; cylindrical blocks, square blocks, ball bearings and Euro style. For purposes of resawing, we like the Euro-style guides because they do an exceptional job of supporting wide blades (Photo 7). But if you plan to use blades under 1/4-in. wide, we'd recommend the block-style guides (Photo 8) fitted with nonmetallic blocks, such as Cool Blocks (about \$12 from Woodworking Fast-TraK, 888-327-7725). This style allows you to capture a narrow blade between the guides with no chance of damaging the teeth.

Our favorite blade guard assembly is the one-piece guard with a rack-and-pinion adjustment for raising and lowering (Photo 9). Several saws have a telescoping blade guard that is also simple to adjust. A column-mounted switch, hinged wheel covers, an easily accessible tensioning knob and a rip fence are also features worth looking for.

Recommendations

In choosing our favorites, we considered a saw's ability to do wide resawing in hard and soft wood. We balanced that with an eye towards user-friendly features and general bandsawing.

The Laguna 16 in. and the Jet 18 in. won Editors' Choice awards. Both have Euro-style guides and welded-steel frames. The Delta and Jet 14-in, 1-hp saws are our Best Buys. These saws both accept riser blocks and have 12-in. resaw capacity. Other machines we considered for Best Buy were the Lobo 18 in. and the Grizzly 18 in. They both have welded-steel frames with 2-hp motors, good dust collection and easy-to-adjust rack-and-pinion front blade guards. But they both lack a blade-tension gauge which could lead to over tensioning. Lobo's lower blade guides were difficult to adjust and the Grizzly 18 in. had more vibration than the other welded-steel frame machines.

In selecting a saw, don't overlook its electrical requirements. Some require 220 volts and some 110-volt saws have pretty high amperage requirements. Make sure your work area has the necessary wiring and circuitry. Check with a licensed electrician if you're in doubt.



EDITORS' CHOICE

Laguna LT 16 in.; \$1,345

PROS

- 1-1/2-hp motor
- 3,600 sfpm blade speed
- 12-in. resaw capacity
- Welded-steel frame
- Optional nonmetallic block guides available
- Two 4-in. dust ports
- Prewired and fully assembled
- One-piece front guard.

CONS

- Requires 220 service
- Lacks rack-and-pinion guard adjustment.



EDITORS' CHOICE

Jet JWBS 18 in.; \$1,099

PROS

- 1-1/2-hp motor
- 3,000 sfpm blade speed
- 115 or 230 volts
- Welded-steel frame
- One-piece front guard with rack-and-pinion guard adjustment
- Well-designed rip fence included with saw.

CONS

- Only available with Euro-style guides
- Only 10-in. resaw capacity.



BEST BUY

Jet JW14CS 14 in. with riser block; \$650

PROS

- 1-hp motor
- 3,000 sfpm blade speed
- 115 or 230 volts
- 12-in. resaw capacity
- Closed base
- Telescoping front blade guard
- Accepts nonmetallic guide blocks.

CONS

- Small dust port
- Micro-adjustment knobs on bottom blade guide are hard to access.



BEST BUY


Delta 28-280 14 in. with riser block; \$790

PROS

- 1-hp motor
- 3,000 sfpm blade speed
- 115 or 230 volts
- 12-in. resaw capacity
- Closed base
- Accepts nonmetallic guide blocks
- Heaviest cast-iron frame among the 14-in. saws.

CONS

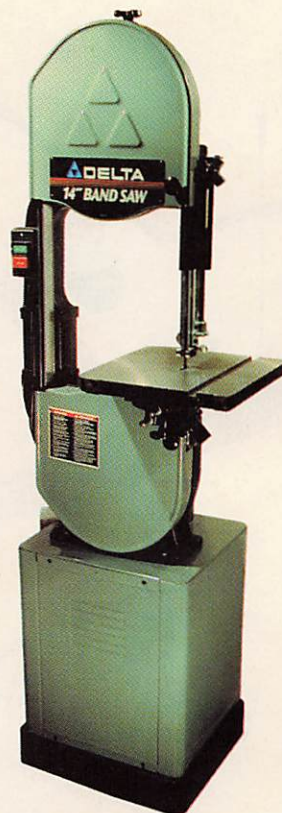- Front blade guard difficult to keep aligned
- Small dust port.



AW

Hold It! Roll It! Hang It! Store It!

Edited by **Randy Johnson**

Small Shop Tips

Low-Rider Mobile Tool Base

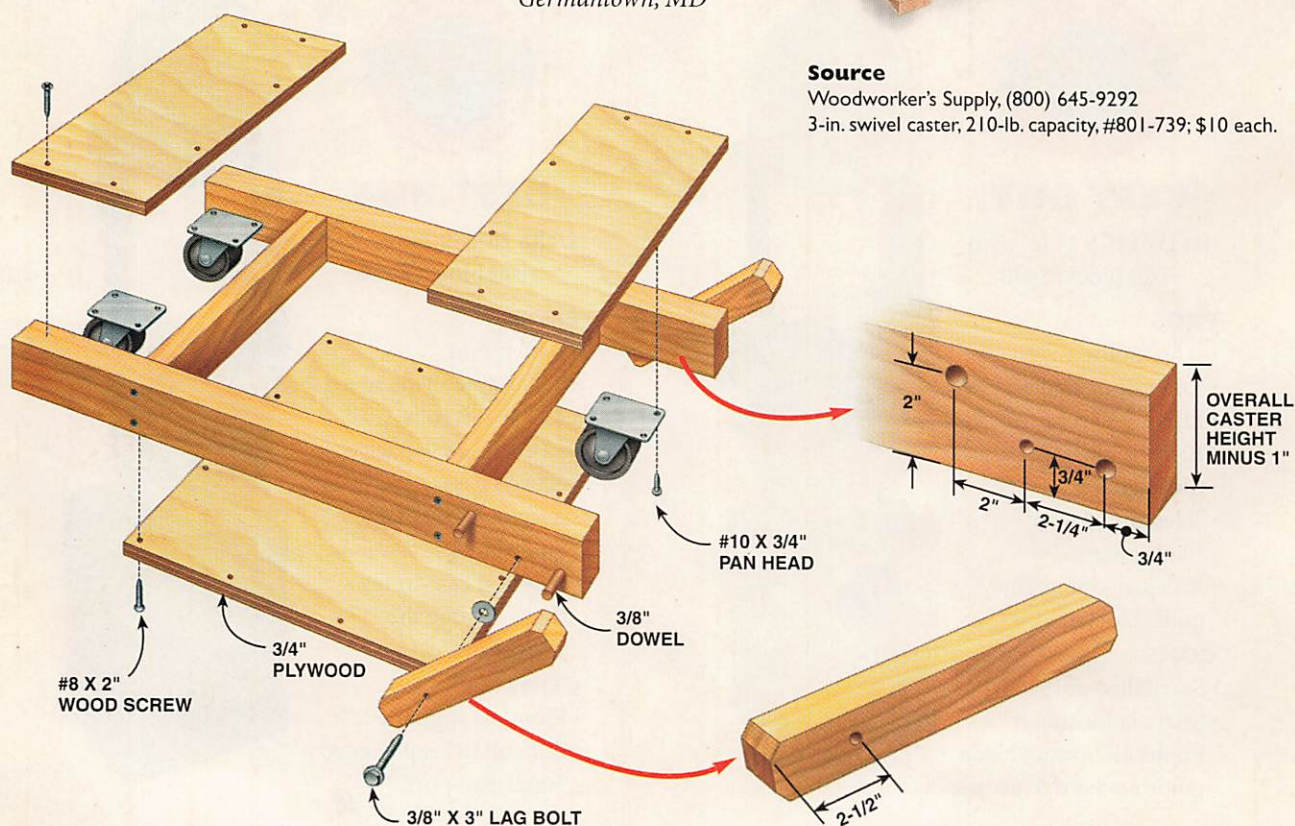
I got fed up with dragging my stationary tools around my garage to make room for my car, so I built mobile bases. Unlike some shop-made bases, this design adds only about 1 in. to the height of my tools. I made them out of 2x4s and plywood, fastened with glue and screws. The foot levers keep the base from rolling while I'm operating the machine. Cost? It was about \$40 for my jointer base, and worth every penny.

*Brian K. Ott
Germantown, MD*



Source

Woodworker's Supply, (800) 645-9292
3-in. swivel caster, 210-lb. capacity, #801-739; \$10 each.



ART DIRECTION: VERN STREETS AND BARBARA PEDERSON
PHOTOGRAPHY: BILL ZUEHLKE AND RAMON MORENO • ILLUSTRATION: FRANK ROHRBACH

Get Rid of Your Gutters!

RAINHANDLER[®]

Self-Cleans.

Unique louver design allows leaves and debris to blow or wash away.

Protects Property.

The Rainhandler self-cleaning system eliminates clogged, overflowing gutters and downspouts. No ground erosion. No more destructive ice dams from frozen gutters.

Protects You.

The Rainhandler self-cleaning system protects you from the need to climb ladders and roofs to clean clogged gutters.

Prevents Erosion.

Rainoff is converted to a 2 to 3 foot wide band of soft rain-sized droplets sprinkling the landscaping.

Maintains Itself.

The all-aluminum, never-rusting, maintenance-free Rainhandler louvers make messy, deteriorating gutters and downspouts history.

Beautifies.

The Rainhandler system is practically invisible. No gutters, downspouts, leaders or splash blocks to detract from the natural beauty of your home.

Installs Easily.

Each 5-foot section comes with 3 brackets & 6 screws. Do your entire home in 3 or 4 hours.

Guarantees.

Rainhandler comes with a 25-year manufacturer's warranty. Performance satisfaction is guaranteed for one full year.

Phone or Write for FREE Information



from Savetime Corp.

Dept. AW0701

2710 North Avenue/Bridgeport, CT 06604

1-800-942-3004/Fax 1-800-606-2028

Name _____

Address _____

City _____ State _____

Zip _____ Phone () _____

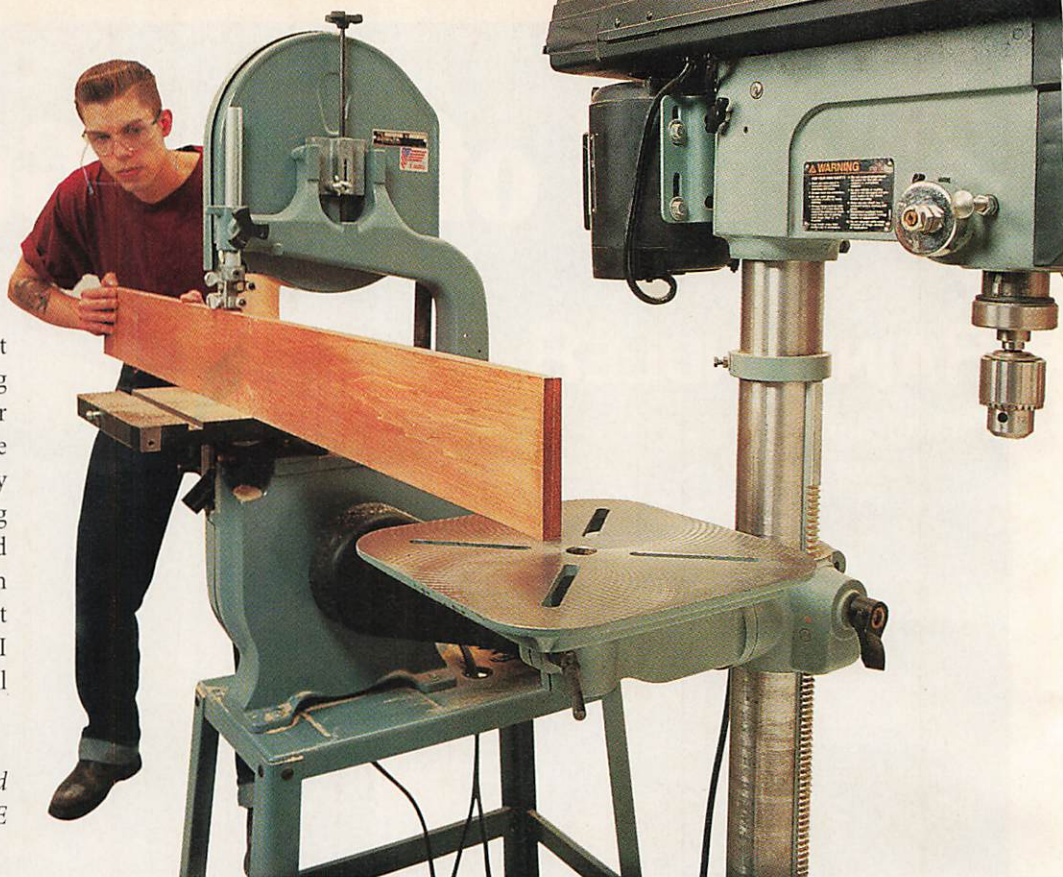
www.rainhandler.com/aw

Small Shop Tips

Bandsaw Outfeed Table

I recently tackled a project that had me resawing extra-long boards. I found that my regular outfeed roller stand wasn't stable or tall enough, so I pulled my drill press into position, swung the table to the side and adjusted the height to match that of my bandsaw table. It worked so well that next time I have to bandsaw long stock, I'll go right for that drill press!


Joshua Ballard
Wilmington, DE



Forrest Saw Blades

"You Can Count On Us For Quality, Performance, and Dependability!"

**America's
Best Since 1946!**



Jim Forrest, President

"For over 55 years, we have provided only the finest quality products and services."

"That's why I can make this exceptional guarantee: **Purchase any Forrest blade or dado and use it for up to 30 days. If you are not completely satisfied for any reason, return it for a full refund.**

There's never any risk to you. You have my word on it."

Jim Forrest

Duraline HI A/T

Cuts melamine perfectly. 220mm & 300mm

available. Our best plywood blade.

| | Sale Price | 10% Off 1st Blade | 15% Off 2nd Blade |
|----------------------------|------------|-------------------|-------------------|
| 10"x80 T (1/8" or 3/32" K) | \$459 | \$143 | \$135 |
| 12"x80 T x1" (1/8" K) | \$484 | \$163 | \$154 |

14"x100T x1", 14"x80T x1", 16"x100T x1", 8", 7 1/4", others available. Call for prices.

Woodworker II

ALL PURPOSE - table saws and portable circular saws.

| | Sale Price | 10% Off 1st Blade | 15% Off 2nd Blade |
|---------------------------------|------------|-------------------|-------------------|
| 12" x 40 T x 1" | \$429 | \$116 | \$110 |
| 10" x 40 T (1/8" or 3/32" K) | \$419 | \$107 | \$101 |
| 10" x 30 T (1/8" or 3/32" K) | \$399 | \$89 | \$84 |
| 8 1/4" x 40 T (3/32" Kerf)* | \$399 | \$89 | \$84 |
| 8" x 40 T (3/32" Kerf) | \$399 | \$89 | \$84 |
| 7 1/4" x 30 T (3/32" Kerf) | \$399 | \$62 | \$59 |
| 5 3/8" x 40T x 10mm (5/64" K)** | \$399 | \$80 | \$76 |

14"x40T x1", 14"x30T x1", 12"x30T x1", 9"x40T, 9"x30T, 8"x30T (3/32" K), 6"x40T (3/32" K) Call for prices.

*For Sears & Makita **For DeWalt Cordless Portables

Dado-King

You get flat-bottomed grooves and no splintering—even when crosscutting oak plys and melamine. Six 4-tooth chippers (incl. 3/32" chipper), two 24-tooth outside blades plus shims. Cuts 1/8" to 29/32" grooves.

| | Sale Price | 10% Off 1st Set | 15% Off 2nd Set |
|---------|------------|-----------------|-----------------|
| 6" set | \$269 | \$242 | \$229 |
| 8" set | \$289 | \$260 | \$245 |
| 10" set | \$349 | \$314 | \$297 |
| 12" set | \$449 | \$404 | \$382 |

10" Blade Runner carrying case with 6", 8", or 10" Dado sets. Included **FREE** with your order!

Order within 30 days and receive \$15 in DISCOUNT COUPONS* for in-house sharpening of any blade or dado!

*3 coupons at \$5 each, use 1 coupon per blade. **Choose a free gift now through August 31, 2001, or while supplies last.



Chop Master

Specialty designed for sliding compound miter, miter-chop, and radial saws.

| | Sale Price | 10% Off 1st Blade | 15% Off 2nd Blade |
|---------------------|------------|-------------------|-------------------|
| 8 1/4" x 60T x 5/8" | \$109 | \$98 | \$93 |
| 8 1/2" x 60T x 5/8" | \$119 | \$107 | \$101 |
| 10" x 80T x 5/8" | \$139 | \$125 | \$118 |
| 12" x 80T x 1" | \$149 | \$134 | \$127 |
| 15" x 100T x 1" | \$199 | \$179 | \$169 |

6 1/2" x 40T x 5/8", 9" x 80T x 5/8", 14" x 100T x 1" also available. Call for prices.

Woodworker I

Designed for radial arm or tablesaws - fine crosscut.

| | Sale Price | 10% Off 1st Blade | 15% Off 2nd Blade |
|--------------------------|------------|-------------------|-------------------|
| 7 1/4", 8", 8 1/4" x 60T | \$109 | \$98 | \$93 |
| 10" x 60 T | \$129 | \$116 | \$110 |
| 12" x 60 T | \$139 | \$125 | \$118 |

9" x 60T, 14" x 60T also available. Call for prices.

Two Easy Ways to Order

Call toll-free

1-800-733-7111 OR **woodmall.com**

(In NJ, 973-473-5236)

Fax 973-471-3333

Se habla español

Visit our internet store

OR, **stores.yahoo.com/forrestman**

AMERICAN EXPRESS

MasterCard

VISA

DISCOVER

FREE SHIPPING-
All Orders Over \$275
Saw blade - \$6 • Dado - \$8 • Stiffener - \$2

FORREST

Forrest Manufacturing Company
457 River Road
Clifton, NJ 07014

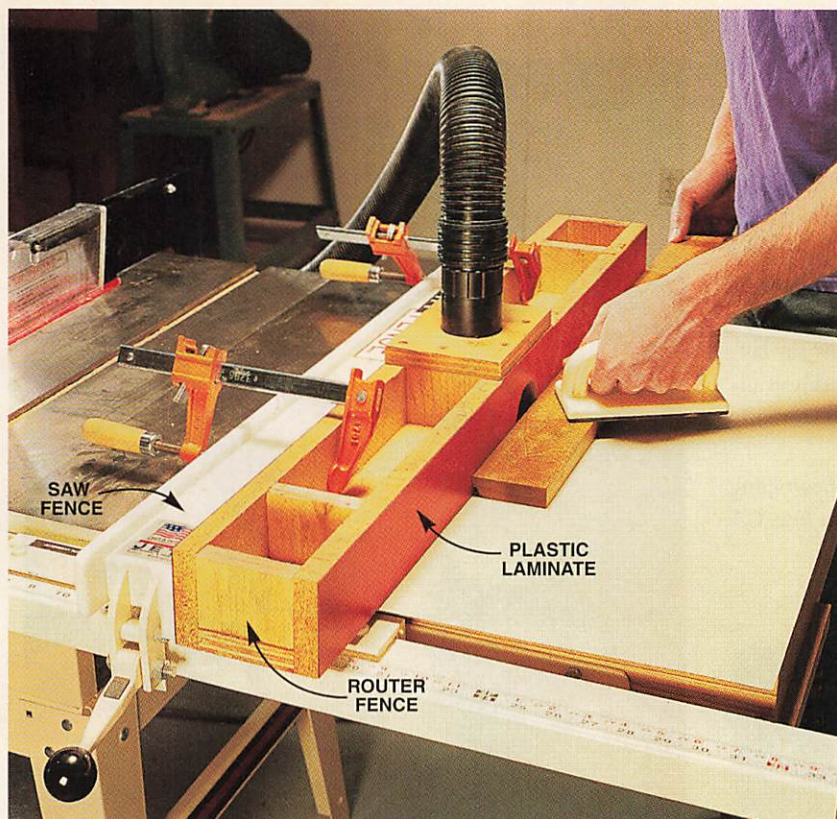
Western Canada: Call Sharp Tech, Inc. 877-228-0908
Other Canadian sales: Call CMR - Ron Collier 800-229-4814

© 2000 Forrest Manufacturing Company, Inc.


Tablesaw Router Fence

I live in big sky country, but my shop is as cramped as an efficiency apartment in downtown Manhattan! Consequently, I use my table-saw extension wing as a router table to save floor space. To make use of the table-saw's fence, I clamp on a shop-made router fence. The combination of these two fences is great. I get the easy adjustment of the saw fence and the router fence is wide enough to accommodate big bits. I also built in a dust port that does a super job of clearing the chips.

Bernie Singers
Smithton, MT



Buy Wood Online!

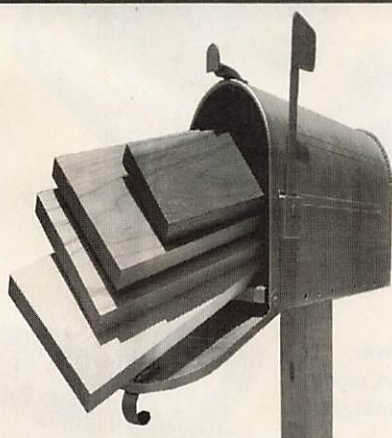

awpc
atlanta wood products center, inc.

800.964.7804

hardwoodweb.com



ProTop™

FREE CATALOG
1-800-786-8902

Through original, innovative design, the award winning ProTop router table line continues to fulfill the needs of all woodworkers - from novice to professional. With five models to choose from and a full line of quality accessories, Bench Dog has what you need. Tested. Trusted. Made in U.S.A.



benchdog.com

LAWN LEAF COLLECTION HOSE
WOODSHOP DUST COLLECTION HOSE

**NEED
HOSE?**

**GET THE BEST
BUY DIRECT ON-LINE**

- Same Day Shipment
- 24/7/365 Easy Ordering
- Download Product Data
- Telephone Tech Support
- Warehouses in US & Europe

iHOZs.com
International Hose Supply



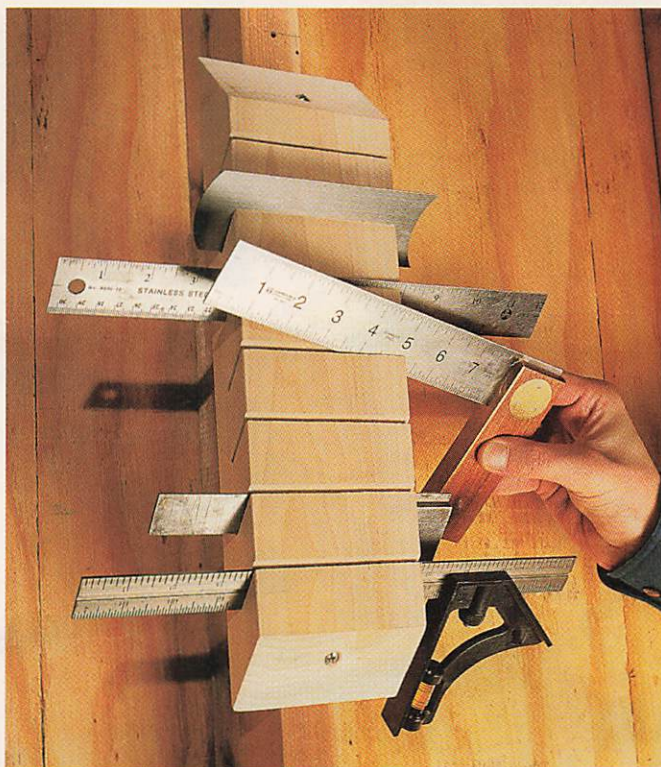
Small Shop Tips

Simple Storage for Layout Tools

I used to keep my layout tools in a toolbox, but they always banged around against each other. I needed a better way to store them, so I came up with this simple rack. All it took was a chunk of 2x6 and some angle cuts spaced about 1-1/2 in. apart. Now my layout tools are protected from damage and readily available. Plus, it turned out to be a good way to store my scrapers too. **AW**

Leon Long
San Jose, CA

If you have an original Small Shop Tip, send it to us with a sketch or photo. We pay \$200 for each one we print. Send to: **Small Shop Tips, American Woodworker, 2915 Commers Drive, Suite 700, Eagan, MN 55121.** Submissions can't be returned and become our property upon acceptance and payment.



Professional Power...

DR® CHIPPER

Makes Brush Piles **DISAPPEAR!**

- Devours branches up to 4-1/2" thick!
- Turns fallen limbs, storm damage, tops from felled trees into useful wood chip mulch in **MINUTES!**
- **3 to 4 times FASTER** than ordinary homeowner chipper/shredders which were originally designed for grinding up garden wastes as opposed to heavy chipping.
- Sold **FACTORY-DIRECT** at great savings!



18 HP
twin-cylinder,
Electric-Start,
and Road-
Towable
model
shown.



Made in the U.S.A.

CALL TOLL-FREE
1(800)473-5577

Please mail coupon today for **FREE DETAILS** about the Revolutionary **DR® CHIPPER** including prices of models from 10 to 18 HP and Factory-Direct Savings now in effect.

Name _____ AMW

Address _____

City _____ State _____ Zip _____

DR® COUNTRY HOME PRODUCTS®, Dept. 39817X
Meigs Road, P.O. Box 25, Vergennes, VT 05491
www.drchipper.com

What do you look for in a biscuit joiner?

"...when I asked a group of professional cabinetmakers what they looked for in a biscuit joiner, their answer was, **'the name Lamello on the side.'**"

CWB - Custom Woodworking Business
Biscuit Joiners Comparison Test, December 2000

Once again, the top-of-the-line Lamello Top 20 is rated the best overall!

"At the top of the overall rankings, the Lamello Top 20 is hard to beat on any score."

See why nothing beats a Lamello for power, precision and balanced design for use on wood, laminates, solid surface and aluminum materials.



Lamello Classic C2

- Swivel front fence
- Maximum depth
- Extra-flat, anti-slip pads
- Stop square for vertical work



E-Mail:
lamello@csaw.com

Purchase online at
www.csaw.com
or call 1-800-252-6355!

COLONIAL SAW
MACHINERY SALES AND SERVICE

FREE PRODUCT INFORMATION

To receive literature from any of the companies listed below, send in the attached Reader Service Card.

Circle the numbers which correspond to the information you wish to receive,
place stamp on postcard and just drop in the mail. Also, you may send requests to:

American Woodworker, Reader Service Management Department, P.O. Box 5337, Pittsfield, MA 01203-5337.

| | Page | Circle | | Page | Circle |
|------------------------------------|----------------|------------|---|--------|---------|
| 1st Cut Bandsaw Systems | 100 | 1 | Librawood.com | 101 | 57 |
| Accuset Tool Company | 101, 102 | 2 | Lignomat..... | 100 | 58 |
| Adams Wood Products..... | 98 | 3 | Logosol..... | 103 | 59 |
| Amana Tool..... | 11 | 4 | LRH Enterprises, Inc. | 18 | 60 |
| Amazon.com | 12, 14, 18, 34 | 5, 6, 7, 8 | McFeelys | 101 | 61 |
| American Woodworker Show | 65 | 9 | Minuteman..... | 32 | 62 |
| Andrews Company | 98 | 10 | Minwax | 5 | 63 |
| Atlanta Hardwood Corporation | 95 | 11 | Miracle Steel..... | 101 | 64 |
| Baker Products..... | 14 | 12 | MLCS..... | 43 | 65 |
| Ball & Ball..... | 100 | 13 | Murray Clock Craft | 98 | 66 |
| Bartley Collection, The | 102 | 14 | Norwood Industries | 100 | 67 |
| Beara Hardwoods..... | 33 | 15 | Nyle Corporation | 100 | 68 |
| Bench Dog Tool | 95 | 16 | Oneida Air Systems..... | 12 | 69 |
| Better Built Corporation..... | 100 | 17 | Oreck..... | 41 | 70 |
| Brand New..... | 103 | 18 | Packard Woodworks | 99 | 71 |
| Cabinetparts.com | 98 | 19 | Patrick's Turning Point..... | 99 | 72 |
| Colonial Saw | 96 | 20 | Pharoah Manufacturing | 101 | 73 |
| Cook's Saw & Machinery | 99 | 21 | Porter Cable | 19 | 74 |
| Country Home Products | 96 | 22 | Rainhandler | 93 | 75 |
| Cryderman Productions..... | 98 | 23 | Rockler Woodworking and Hardware..... | 34 | 76 |
| Datco International | 98 | 24 | Rousseau Company..... | 98 | 77 |
| Delta | 15, Cover 3 | 25, 26 | Sandy Pond Hardwoods..... | 98 | 78 |
| DeWalt..... | 17 | 27 | Santech | 21 | 79 |
| Diefenbach Benches | 102 | 28 | Sears | 44, 45 | 80 |
| Dodge Caravan | 6, 7 | — | Shaker Workshops | 100 | 81 |
| Ebac Lumber | 103 | 29 | Shopbot | 99 | 82 |
| Endless Pools..... | 99 | 30 | Smithy..... | 102 | 83 |
| Fein Power Tools..... | 22 | 31 | Specialty Furniture Design | 101 | 84 |
| Fisch | 20 | 32 | Steve Wall Lumber | 103 | 85 |
| Ford | 26, 27 | 33 | Suffolk Machinery | 102 | 86 |
| Forrest | 94 | — | Sunporch Structures..... | 46 | — |
| Freud | 13 | 34 | System Three Resin..... | 100 | 87 |
| Fuji Spray | 102 | 35 | Talarico Hardwoods..... | 102 | 88 |
| Gorilla Glue | 33 | 36 | Tempur-Pedic | 47 | 89 |
| Grizzly..... | Cover 2, 1 | 37 | Thomas Golding Fine Art Woodcarving | 102 | 90 |
| Groff & Groff Lumber, Inc. | 99 | 38 | Timberking..... | 100 | 91 |
| Guardsman..... | 37 | 39 | Tool Corral.com | 98 | 92 |
| Hearne Hardwoods | 99 | 40 | Tormek..... | 38 | 93 |
| Highland Hardware..... | 98 | 41 | Tremont Nail Company | 98 | 94 |
| Home Depot..... | 9, 25, 31 | 42, 43, 44 | UJ Ramelson Company | 101 | 95 |
| HTC Products..... | 29 | 45 | US Buildings..... | 103 | 96 |
| International Hose | 95 | 46 | Willard Brothers..... | 100 | 97 |
| Japan Woodworker | 101 | 47 | Windy Hill | 103 | 98 |
| JB Dawn Products Division | 102 | 48 | Woodcraft Supply | 10 | — |
| JIL Industries | 75 | 49 | Woodmaster Tool | 24, 39 | 99, 100 |
| Jointech | 23 | 50 | Woodstock International | 2 | 101 |
| Keller & Co. | 102 | 51 | Woodworker's Hardware | 10 | 102 |
| Klockit..... | 100 | 52 | Woodworker's Source | 99 | 103 |
| Kreg Tool | 24 | 53 | Woodworkers Discount Books | 99 | 104 |
| Laguna Tools | C4 | 54 | Yankee Hardwood | 99 | 105 |
| LC Kehoe | 32 | 55 | Zippo..... | 46 | 106 |
| Leigh Industries Ltd. | 23 | 56 | | | |

WOODWORKER'S MARKETPLACE

Look for the Reader Service Numbers on page 97

For a dirt & dust free finish
GET IT ALL

with Datco
Surgical Blue™
& Professional™
Tack Cloth




Call 1-800-TACKCLOTH
or order online at www.tackcloth.com

**CUT NAILS . . . for
Restoration and Historic
Reconstruction from the
oldest nailmaker in the U.S.**


Send for our free catalog featuring
a wide variety of antique hardware,
accessories and a complete line of
our restoration nails including rose
head, fine finish and wrought head.
Order our cut nail sample set of 20
Historic patterns. \$9.95 ppd.

www.TremontNail.com
TREMONT NAIL CO.
800-842-0560 cutnails@aol.com



FREE TOOL CATALOG

Helping You Become a Better Woodworker



highland hardware

Our giant tool catalog gives more than
just manufacturer's specs.
We provide detailed tool descriptions,
useful techniques, as well as a
schedule of educational seminars.

Visit us on the Internet at
<http://www.highland-hardware.com>
Call TOLL-FREE for FREE catalog

888-500-4466

Figured Hardwoods

**SANDY POND
HARDWOODS, INC.**

15th Anniversary!

Lumber

Flooring

Figured
Hardwoods
Domestics &
Exotics



Jeff

Jewitt

appearing

on

July 14th

1-800-546-9663

<http://www.figuredhardwoods.com>

Build a Clock!

Clock kits, from grandfather to
shelf clocks, including plans,
movements, and dials. Send \$2.00
for a full-color catalog, and receive
a \$5.00 credit voucher toward your
first purchase.

MURRAY CLOCK CRAFT

512 McNicoll Ave., Dept. AW
Willowdale, Ont. M2H 2E1
Tel: (416) 499-4531, Fax: (416) 499-3686
E-mail: clock@interlog.com
www.murrayclock.com



Adams Wood Products™
L.T.D.,

NEW

FINIALS

FROM STOCK
NO MINIMUM ORDER

Made In
Tennessee



A0853



A0850



A0852



A0851


AVAILABLE IN
MAPLE, CHERRY,
OAK AND
PAINT GRADE

FREE COLOR CATALOG

P.O. Box 728 Dept. AW35
Morristown, TN 37815-0728
Phone 423-587-2942 • Fax 423-586-2188
www.adamswoodproducts.com

mepla Salice Grass

www.cabinetparts.com




The one
stop source for
all your cabinet needs

blum Wilsonart Laminates

Rent-A-Shelf

KV Accuride

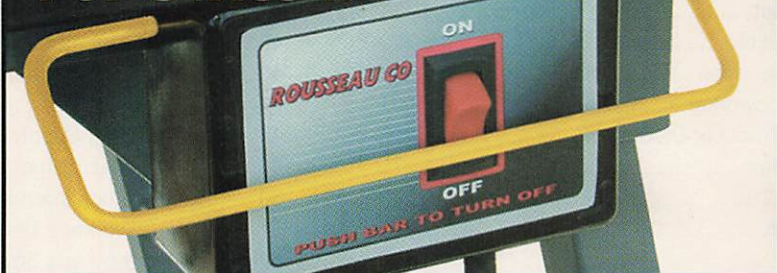**Prevents Fumbling
For Switch!**




Safety Power Switch
15A 120V

FREE CATALOG 800-635-3416 • www.rousseauco.com

Personal Robotic Tools for Productivity & Flexibility

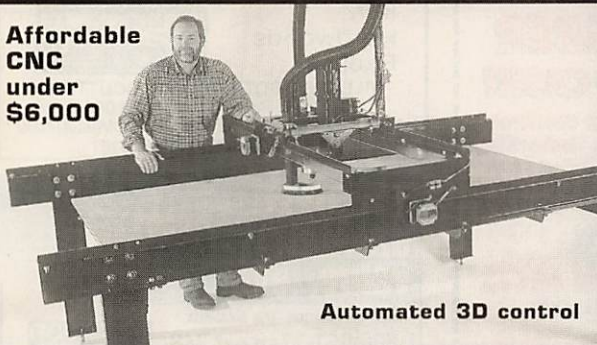**Affordable
CNC
under
\$6,000**



Automated 3D control

www.ShopBotTools.com



ShopBot®

The Workshop RoBot

(919) 680-4800
Durham, NC
Fax (919) 680-4900
888-680-4466

HEARNE HARDWOODS Specializing in Pennsylvania Cherry

Plain & Figured Cherry from 4/4 to 16/4

Also: Premium Walnut, figured Maples & a large variety of exceptionally

fine domestic & imported lumber including free form slabs, turning blanks, burls, & Instrument grade lumber.

200 Whiteside Drive, Oxford, PA 19363

Toll Free **888-814-0007** Fax 610-932-3130

National & International Shipping



Increase Profits & Cut Cost With An Accu-Trac Sawmill.

**The Craftsmen's Choice For Converting
Logs Into Valuable Lumber!**

Proud Distributor of

SIMONDS®

Red Streak Bandsaw Blades

**For a FREE Video & Catalog
Mention Code # AMW07**

800-473-4804

Cook's Saw & Machine

MP30 Ready-to-Saw

Heavy Duty 3x6 Frame

4 Post Head Frame

19" Band Wheels

Uses 14" Band Blades

2 Movable Log Clamps

\$4,695



Shown with optional
trailer package.

Visit Our Online Catalog
www.cooksaw.com

custom wood turning

No catalogs available - we work your design.

"Turning Dreams Into Reality Since 1949."

Flutes/Reeds/Spirals - Lengths to 18", 6" / Diameters to 20" / 1-1000 Pieces

PATRICK'S TURNING POINT LLP

457 Industrial Drive, Barnesville, GA 30204

800-841-4619 • 770-358-4700 • ptp@accessunited.com



GROFF & GROFF LUMBER, INC.

OVER 70 DOMESTIC AND IMPORTED SPECIES

Custom-Made Flooring

Curly Cherry 4/4 to 16/4 • Birdseye & Tiger Maple

Mahogany 30" • Premium Walnut & Cherry

Matching flitches, 5/4 to 8/4 18"-40" wide

K.D. Lumber, Nationwide & International Shipping

No Order Too Large or Too Small

E-mail: wood4u@epix.net

(717) 284-0001 800-342-0001 FAX (717) 284-2400

Get a **Free Copy** of our
CATALOG for

WOODTURNERS

Call Toll Free...

1-800-683-8876

or write...

Packard Woodworks PO Box 718 Tryon, NC 28782

E-Mail Address... packard@alltel.net



"The Woodturners' Source"



Select Hardwoods

Volume Discounts, Seasonal Specials

**Providing woodworkers with top quality
hardwood for their prized creations.**

Web: www.yankeehardwood.com

OR phone us at: 800.646.6929

MasterCard / Visa

Swim At Home™



Swim or exercise against a smooth current adjustable to any speed or ability. Ideal for swimming, water aerobics, rehabilitation and fun. The 8'x15' Endless Pool™ is simple to maintain, economical to run, and easy to install inside or outdoors.

**FOR FREE VIDEO CALL
(800) 233-0741, Ext. 1541**

Visit **www.endlesspools.com**
or write Endless Pools, Inc.
200 E Dutton Mill Rd, Dept. 1541
Aston, PA 19014



HARDWOODS

Over 100 Quality Hardwoods

from Around the World

LUMBER • VENEER • TURNING STOCK

- Timbers from Protected Forests •
- Quantity Discounts •
- Prompt Shipping Arranged Worldwide •
- Custom Milling - Lumber Cut To Size •
- All Inquiries Welcome •

Call or Write for a Free Catalog
• Satisfaction Guaranteed •

**Visit us on the World Wide Web
www.woodworkerssource.com**
for Specials, Current Prices and
Complete Wood Descriptions
e-mail: wood@woodworkerssource.com



1-800-423-2450

WOODWORKERS Source

5402 S. 40th St. • Phoenix, AZ 85040

Woodworking Books, Videos & Plans

500 titles in stock
Save up to 20% off bookstore prices



Catalog \$2

800-378-4060

www.discount-books.com

4460 Tierra Rojo Dr, Colo Springs, CO 80926

1st Cuts Bandsaw Systems

- Rolling Carriage, collapsible attachment for 18" & larger Bandsaws
- Turn your saw into a small mill & much more, check out our website for all the details



Pat Pending

www.1stcuts.com • 1stcuts@delmail.com • 610-486-6465

WOOD MOISTURE METERS

- Universal
- Accurate - Handy
- Pinpoints moisture problems from the surface to the core!
- For heavy timbers to veneer, for rough, smooth or curved surfaces. For wet and dry wood.



- Lignomat USA
- PO Box 30145
- Portland, OR 97294

Lignomat :: 800-227-2105

The RIPS AW

the only truly portable sawmill made.

With a weight of only 45 pounds, this chainsaw-driven bandsaw can easily be carried and operated by one person. In just ten minutes you can make the changeover from chainsaw to sawmill and cut trees where they fall. The RIPS AW is capable of cutting up to 12 fpm (feet per minute) in softwood. Video \$10. For a FREE BROCHURE, contact:



Better Built Corporation
789 Woburn St. Dept AW
Wilmington, NA 01887

ph: 978-657-5636
fax: 978-658-0444

"Free Brochure Download"

www.ripsaw.com



TIMBERKING SAWMILL

URNS TIMBER INTO CASH!



TAKE CONTROL with TimberKing!

- Excellent VALUE
- Premium QUALITY
- Strong HERITAGE

CALL NOW FOR FREE FACTS
1-800-942-4406 ext SY27

TIMBERKING, Inc.

Dept. SY27, P.O. Box 32484
KC, MO 64120-4284

Economical Model 1220

Quality Kiln Drying

It's Easy and Affordable with a Nyle DH Kiln! Made in USA

Call today for free facts on our compact, easy to use dehumidification kilns.

800-777-NYLE

http://www.nyle.com

EASY PAYMENTS AVAILABLE



PO Box 1107 Bangor ME 04402-1107



FREE Booklet!

16 fact-filled pages—call for yours today.

Create a Classic —

with Shaker kits! perfect for today's decorating. Authentic reproduction furniture: Chairs, tables, bookcases, rockers, mirrors, bar stools and gifts of toys, bowls, trays, pictures, lamps, baskets, jewelry and boxes. Precisely finished kits or custom finished. Shaker Chair Tapes. **Catalog \$2 - includes tape samples.**

SHAKER WORKSHOPS

Box 8001-AW2, Ashburnham, Ma 014430
978-827-9900



Enfield Counter Chair

Sawmill
Kiln
Hardwoods
Exotics



WILLARD BROTHERS WOODCUTTERS

300 Basin Road, Trenton, NJ 08619
CALL 1-800-320-6519 FOR PRICE LIST AND CATALOG
www.willardbrothers.net

The best sawmill value...ever.

\$3895



FREE INFORMATION - USA & CANADA

1-800-661-7746 ext 348

NORWOOD

EPOXY

Quick Cure

The definitive "five-minute epoxy" for fast, permanent repairs to wood, fiberglass, ceramics, glass, leather and plastics.



For the nearest dealer, call 1-800-333-5514



System Three Resins, Inc.
P.O. Box 70436 • Seattle, WA 98107

Handcrafted Heirlooms

Become More Precious With Time!



FREE* CATALOG!

Mention OFFER. AW701

(*Canada \$2 • Foreign \$5)



Extensive Line of Clock Kits & Components

- Clock Kits for Every Skill Level
- Atomic Time Movements
- Quartz & Mechanical Movements
- Hands, Hardware, Wood Parts and More!

Finished Clocks & Watches

- Atomic Time Clocks & Watches
- Anniversary Clocks
- Cuckoo Clocks
- Personalized Clocks


www.klockit.com

Internet Exclusive Products!

Listen to Mechanical & Music Movements!

1-800-KLOCKIT that's 556-2548

Reproduction Brass and Iron Hardware



- Lighting Fixtures
- Fireplace Accessories
- Furniture Hardware
- Builder's Hardware



For details, call, write or visit our web site:
www.ballandball-us.com
Or, send \$7.00 (refunded on 1st order) for our 108 page catalog.

463 W. Lincoln Highway • Exton, PA 19341
Phone: 610-363-7330 • Fax: 610-363-7639
Orders: 1-800-257-3711

www.librawood.com

"The best prices
on the best tools"

"Forrest" Saw Blades

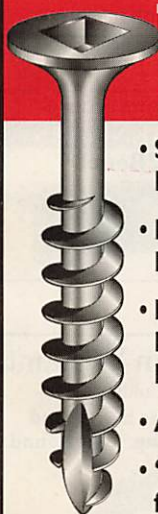
"Whiteside" Router Bits

"Jet" & "Powermatic" Tools

Visit our website at

www.librawood.com

SQUARE DRIVE DECKING SCREWS



- Square Drive Stops Driver Bit Slippage!
- Hardened Steel for Extra Strength
- Deep Thread For Exceptional Holding Power
- Auger Point Starts Fast
- "No-Co-Rode" Finish for Long Life!

We Stock Over 750 Styles, Sizes, and
Finishes of Top Quality Square Drive Screws:
Send for FREE Catalog Today!

McFEELY'S
SQUARE DRIVE SCREWS

PO Box 11169 • Dept AWW
Lynchburg • VA 24506-1169

Toll Free:

1-800-443-7937

U. J. RAMELSON CO., INC. "A Cut Above"

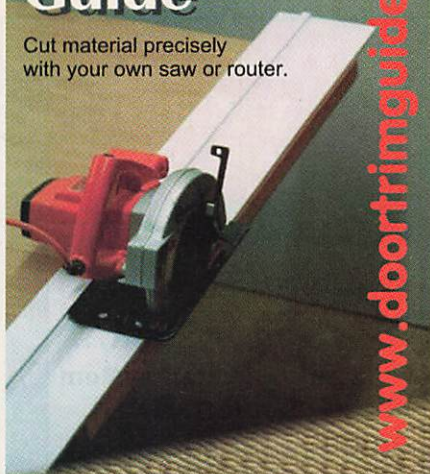
The largest selection of American-Made
Carving Tools in the world.

Manufacturers of
American-Made Carving,
Mini Turning and
Woodworking Tools
since 1937.

WWW.RAMELSON.COM

Trim Guide

Cut material precisely
with your own saw or router.



www.doortrimguide.com

Available in 4, 8 & 12ft. lengths;
\$30, \$90 & \$280. Made of tough
plastic CNC machined for
accuracy. Resists water, cold
and heat. Trim to fit
your equipment.

Pharaoh, Yorba Linda CA
714-792-3757

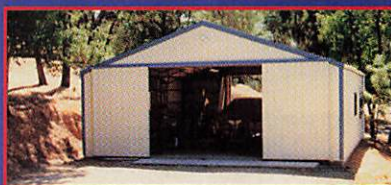
Need a Workshop?

— Buy Manufacturer-Direct —

SAVE THOUSANDS

**WHEN YOU TAKE ADVANTAGE OF OUR
INVENTORY RE-ALIGNMENT SPECIAL
& RESERVE YOURS NOW!**

(take delivery anytime within the next 12 mos.)



- Easy, do-it-yourself assembly—no skilled labor or heavy equipment required.
- Engineered to simplify insulation process, for increased energy efficiency.
- Strong steel frame construction is designed to last—and withstand extreme weather.
- Wide assortment of building styles, sizes and colors available to choose from.

— SPECIAL OFFER —

40' x 60' (a \$20,888 value)

NOW ONLY \$11,291

Includes steel frames & endwalls, galv. sheeting,
hardware, trim & complete assembly plans.

MIRACLETRUSS®
1-800-663-0553

www.miracletruss.com

AMWD

Attn: Table and Radial arm saw owners

Is your fence always needing adjustment and are you tired of inaccurate saw cuts? If so, what you need is the PARAGAUGE® saw alignment system. For complete product details, visit our very informative web site or, if you don't have internet access, call for a free brochure.

www.PARAGAUGE.com

Accuset Tool Co. Troy, MI 1-800-343-6129

RAZOR SAW It cuts FASTER! EASIER! MORE ACCURATELY!

Order now, only \$24.95 post paid!
Craftsmen around the world
Have discovered the secret of
better quality work. The Razor
Saw cuts by pulling, and will
give a cleaner, more accurate
cut in half the time.

Purchase a RAZOR SAW now
and we will include our 72
page catalog of the world's
finest woodworking tools. Or
send \$3.00 for a two year sub-
scription to our Catalog.

The Best handsaw for ALL woodworkers!
Dealer Inquiries Invited.
Dept D2

THE JAPAN WOODWORKER

1731 Clement Ave. • Alameda, CA 94501 • 1-800-537-7820



**Bow Back
Bench &
Chair Plans
\$15.95**

**Octagon
Picnic Table
Plans
\$16.95**



Specialty Furniture Designs

11099 W. ADAMS RD. Dept. AW101 RIVERDALE, MI. 48877

1-800-892-4026

Visa/MC/Discover Prices above include S&H. Color Catalog
\$3.00 - FREE with order. MI add 6%

www.specialtyfurnituredesign.com

Enjoy the benefits of HVLP with a FUJI!



- High transfer efficiency
- Soft, easy to control spray
- Compact and portable

Introducing the new Q3™ and Q4™ Quiet models.
First ever in the mid-price range.
Noise reduced by over 50% for a more relaxed spraying environment.
Systems also include the new Fuji Hi-Flex™ Rubber Hose.

FUJI
INDUSTRIAL SPRAY
EQUIPMENT LTD.

For brochure, please call 1-800-650-0930
Website: www.fujispray.com

SOLID START, Elegant Finish.

OLD GROWTH

Quartersawn White Oak, Curly English Sycamore
NEW and American Sycamore

and Matching, Tight Grained Veneers.

TALARICO HARDWOODS
610-775-0400 www.talaricohardwoods.com
RD #3, Box 3268, Mohnton, PA 19540
VISA / MasterCard



Band Saw Blades

Swedish Silicon Steel • 1/16" Through 2"

TIMBER WOLF™

call: Suffolk Machinery 800-234-7297

Free Catalog • www.suffolkmachinery.com

SUPERSHOP 10-IN-1 WOOD & METAL SHOP

BECOME A BETTER WOODWORKER - GUARANTEED!

SuperShop will increase your woodworking skills or WE'LL BUY IT BACK!

SUPER SHOP

You'll make projects with higher QUALITY,

PRECISION, SPEED & SKILL!

- New, different & BETTER than "lookalike" machines
- 10 most-used tools in 1 for ultimate versatility
- Premium quality makes it an outstanding value
- Rock-solid 450 lbs., 2.5 times MORE than others
- State-of-the-art ELECTRONIC speed controls
- Extra POWER-IN-RESERVE DC motor
- 30-Day RISK FREE Buy-Back Offer & industry-leading Warranty

Get your FREE SUPERSHOP REPORT - "Better Woodworking GUARANTEED!"

CALL TOLL FREE 1-800-476-4849

SuperShop® Dept. AW, P.O. Box 1517, Ann Arbor, MI 48106-1517

☐ YES! Tell me how SuperShop will increase my craftsmanship. Rush facts, specs, and CURRENT SALE OFFER!

Name _____
Address _____
City _____ State _____ Zip _____

SELF-ADHESIVE 70% WOOL FELT

TAPES • STRIPS • DOTS

1-800-796-2333

APPROX. 3/4" & 3/8" THICK
BROWN, GREEN, BLACK,
WHITE, AND SILVER GRAY

UBDANN
PRODUCTS DIV.

9611 S. COTTAGE GROVE AVE.
CHICAGO, IL 60628
773-735-2344 • FAX 773-735-2390

Let's face it:
most dovetail jigs
are a pain...

except one:

The Keller
Dovetail System...
The only dovetail system
that is simple, fast
and accurate.

Fast setup. No test cuts. Precision joinery. Unlimited widths. Classic and variable spacing. Compound, acute and obtuse angles. Curved dovetails. Box joints. Made in USA since 1976. 20-yr. warranty. 30-day money-back guarantee.

VIDEO: \$8.95 + \$2 P/H

To find out more, contact your Dealer or

KELLER & CO. Dept. R70
1327 I Street, Petaluma, CA 94952
(800) 995-2456 (707) 763-9336

The Keller
Dovetail System
Simply the best.



Attn: Table and Radial arm saw owners

Don't put it off any longer... visit us on-line and get the facts on one of the most innovative tools ever designed for precision saw alignment. You'll be amazed at how simple and easy the PARAGAUGE® saw alignment system is to use and how much time and money it saves!

www.PARAGAUGE.com
Accuset Tool Co. Troy, MI 1-800-343-6129

Quality German Workbenches

DIEFENBACH BENCHES™

Call 1-800-32Bench



33498 E. US Hwy 50
Pueblo, CO 81006


www.workbenches.com



Study Carving in Vermont

with Thomas Golding

Week-long Intensives in new and
Traditional Woodcarving. Year Round.



HCR 33, Box 7, Saxtons River, VT 05154
Ph/fax 800-710-1872 www. Dover.net/~carving

Bartley

Kit Furniture In Shaker,
Queen Anne, Chippendale
& Mission Styles.
Save hundreds \$\$\$
by creating your
own masterpiece.



Catalog at
1-800-787-2800
www.bartleycollection.com

Advertise! Call today for rates and information. Toll-Free (800) 394-5157 ext. 12

Great Wood!



"GOOD HOPE CHEST"
BY WILLIAM LOCKE

Figured Cherry

Nature truly is the greatest artist and figured cherry is living proof. If you've ever admired the fluid motion of a flag in a breeze or ripples of sand along a quiet beach, you'll love the look of figured cherry. It's amazing where a piece of wood like this can take the imagination.

The shimmering effect found in figured cherry is a result of irregularities in the growth rings. These quirks of nature result in grain that runs up toward the surface of a board, and then dives back down into it. No one knows what causes the irregularities in the tree, but the three-dimensional rippled effect in the wood is dazzling.

We found our figured cherry at Good Hope Hardwoods in Landenberg, PA—right in the heart of cherry country. All harvested trees are replaced with seedlings, allowing nature to rework its magic.

The roughsawn lumber is allowed to air-dry before final drying takes place in a low-temperature dehumidification kiln. The slow drying process helps preserve subtleties of color and reduces internal stresses in the board. Boards sawn from the same tree are kept together. This practice provides the customer with boards of uniform color, texture and appearance.

Good Hope carries plain and figured cherry in 4/4 all the way up to 24/4; prices vary from \$6 a bd. ft. to \$16 a bd. ft. depending on the grade, width and amount of figure. They will work with you to find the best lumber for your project and can custom cut orders to your specifications. **AW**

Note: Color and figure varies from tree to tree and board to board. Expect variations in the wood you order.

Source

Good Hope Hardwoods
(610) 274-8842
www.goodhope.com

Know of some Great Wood?
We'd love to hear about it.
Write Dave Munkittrick at
dave_munkittrick@readersdigest.com.

WAGON WHEELS

www.windyhillwoods.com

HOW TO MAKE WORKING DECORATIVE WAGON WHEELS

For a catalog send \$4.95

WINDY HILL WOODS, P.O. Box 14169

KANSAS CITY, MO 64152

(816) 746-4695

DRY YOUR OWN LUMBER

Ebac's user friendly dry kilns 200BF - 40,000BF

Mix species in same load. Great 3 year warranty!

Over 7,000 systems worldwide!

Ebac Lumber Dryers

Call Today! 800-433-9011

Manufactured by craftsmen in Williamsburg, VA.

Custom Branding Irons

As low as \$59.95!

Any logo, design, signature

Guaranteed. VISA/MC

BrandNew

800-964-8251 www.brandnew.net

STEVE WALL LUMBER CO.

Quality Hardwoods and Woodworking machinery For
The Craftsman and Educational Institutions

The trusted supplier from the Heart
of North Carolina Furniture County.

HARDWOODS • EXOTICS • THIN
CRAFTWOOD • AROMATIC CEDAR
HARDWOOD PLYWOOD • CUSTOM PANEL
DOORS • HARDWOOD FLOORING

See Our Catalog on the WEB: walllumber.com

BOX 287 • MAYODAN, N.C. 27027

336-427-0637 • 1-800-633-4062

Email: wood@walllumber.com

SEND \$1.00 FOR CATALOG

Save
BIG
on Quality
Steel Buildings



Factory Direct!

Bigger Garage? Build It Yourself!

AMERICA'S
BEST
SELLING
BUILDING!



U.S. Buildings
www.us-buildings.com

Made
in U.S.A.

800-463-6062

FREE BROCHURE & FACTORY PRICE LIST

COMPLETE SAWMILL FOR UNDER \$3000

CALL 1-877-LOGOSOL
FOR FREE VIDEO

WWW.LOGOSOL.COM

 **LOGOSOL**

WOODWORKER'S CLASSIFIED

ACCESSORIES

**GLASS SOURCE for WOOD-
WORKERS.** Glass and mirror custom
cut, beveled, edged, etched, or
grooved to your specifications.
Shipped direct from our shop to
yours. Call for free brochure,
inquiries, or to place an order.
Glass Source: 1-800-588-7435.

ALTERNATIVE ENERGY

Are You Prepared? The best prices
in the country are at
www.YamahaGenerators.com
800-900-8856

BUSINESS OPPORTUNITIES

www.woodworkingtools.com

Check out our woodworking
discussion room for answers
to your woodworking questions.

\$100 PER HOUR woodworking from
your garage, full or part time.
No selling! Free brochure. Home
Tech 800-456-4987

BUNK BEDS. Clear \$300/day making
Bunk Beds. Start at home in
your spare time. (800) 382-3180,
ext. 1562

COUNTRY CRAFTS Enjoy excellent
profits making country craft style
wooden furniture. Receive free
information 800-382-3180, Ext. 7114

BAND SAW BLADES

TIMBER WOLF® Low Tension,
Swedish Silicon Steel, Available
1/16" thru 2". Free catalogue. Suffolk
Machinery Corp., 1-800-234-7297;
www.suffolkmachinery.com

CRAFTS

PIN FROG CAP - injection molded
cap with permanent Japanese pin
frog (kenzan). Create a flower vase.
Great craft sale project for wood
turners and fine wood crafts. For
information contact Donna Gittens
Designs 1-888-514-2244 or email
gittens@telus.net

MUSICAL SUPPLIES

KITS, Blueprints, and Supplies for
harp, dulcimers, banjos, guitars and
more. Contact **Musicmakers Kits** for
a free catalog. 1-800-432-5487.
www.musikit.com

MUSIC INSTRUMENTS

Build a guitar, violin or dulcimer!
Free 108-page catalog featuring kits
and the tools, finishing supplies and
instructions necessary to build your
instrument. Stewart-MacDonald's
Guitar Shop Supply, Box 900W,
Athens, OH 45701. Call 800-848-2273,
stewmac.com

FINISHING SUPPLIES

SPRAY-ON SUEDE. Line boxes easily.
FREE brochure (sample includ-
ed). DonJer, 13142 Murphy Road,
Winnebago, IL 61088. 1-800-336-6537.
www.donjer.com

MISCELLANEOUS

"CREATIVE ACCENTS" Decorative
Wallplates Largest Selection available
- Custom Orders filled! 877-658-3976
www.marketexpo.com

**BACKYARD POND AND WATER
GARDEN HOBBYIST.** We have your
Full Array of Beckett Pumps, Parts
and Pond Supplies! 877-658-3976
www.marketexpo.com

"NOSTALGIC WAREHOUSE" Brass
Door Knobs, Glass Knobs, Brass
Hooks, Cabinet-ware and Accessories.
877-658-3976 www.marketexpo.com

PLANS & KITS

IRISH MAIL HANDCAR. Sleigh,
Buckboard benches and More.
Murray Bros. Supply. 1-888-946-7819
www.woodkitsandplans.com

SCHOOLS/INSTRUCTION

New England School of Architectural
Woodworking. 37 week training
program in cabinetmaking. Job
assistance. 413-527-6103
www.nesaw.com

TOOLS/ACCESSORIES

www.nailzone.com Fast shipping on
Paslode, Senco, an Hitachi nailers,
staplers & fasteners. Low prices.
800-227-2044

WWW.WOODSUCKER.COM 2nd
Cyclone Dust Collectors. Large car-
tridge filter, leak proof construction.
Best quality and value, totally manu-
factured in USA. Introductory price.
\$599. Toll-free 1-866-3NO-DUST.

**PROTECT YOUR TOOLS FROM
RUST!!** Use DRIBAGS silica gel
packs/rechargeable canisters in your
toolbox!! Visit www.dribags.com, or
Call 1-877-374-2247

WOODS/VENEERS

SAWMILL DIRECT; 100 SPECIES
Tropical Exotic Hardwoods Toll Free
(888)434-3031. Bookmark our web
site for information on new invento-
ries and specials: www.anexotichard-wood.com

Since you make all kinds of dust, we make all kinds of dust collectors.



Check out the most powerful new air cleaners in their class.



1 Big machines create big-time dust. Our Model 50-853 3 HP Dust Collector can handle up to four machines and pull bushels of dust out of your shop.



2 NEW Our 50-868 and 50-870 Air Cleaners feature the convenience of remote control operation, plus the most powerful motors in their class. Bottom line? Shop air is filtered faster with Delta than with the competition.



3 Hand sanding and bench work create plenty of dust. Our new Model 50-885 1 HP Sandtrap™ Downdraft Table catches dust right where it's created.



4 Can't afford dust collection for your whole shop? Move the lightweight Model 50-820 Portable Dust Collector wherever you need it.



5 Dust can affect performance and shorten the life of your machines. Our Model 50-850 1 1/2 HP Dust Collector goes anywhere to protect your investment.

No two shops are the same. And neither are their dust problems. Which is why we make the broadest line of dust collection solutions in the business. Everything from portable units to permanent systems to air cleaners that feature the most powerful motors in their class. All of which helps to clear the air. For the name of your nearest Delta dealer, call Delta Machinery, 1-800-438-2486. In Canada, 519-836-2840. www.deltamachinery.com.



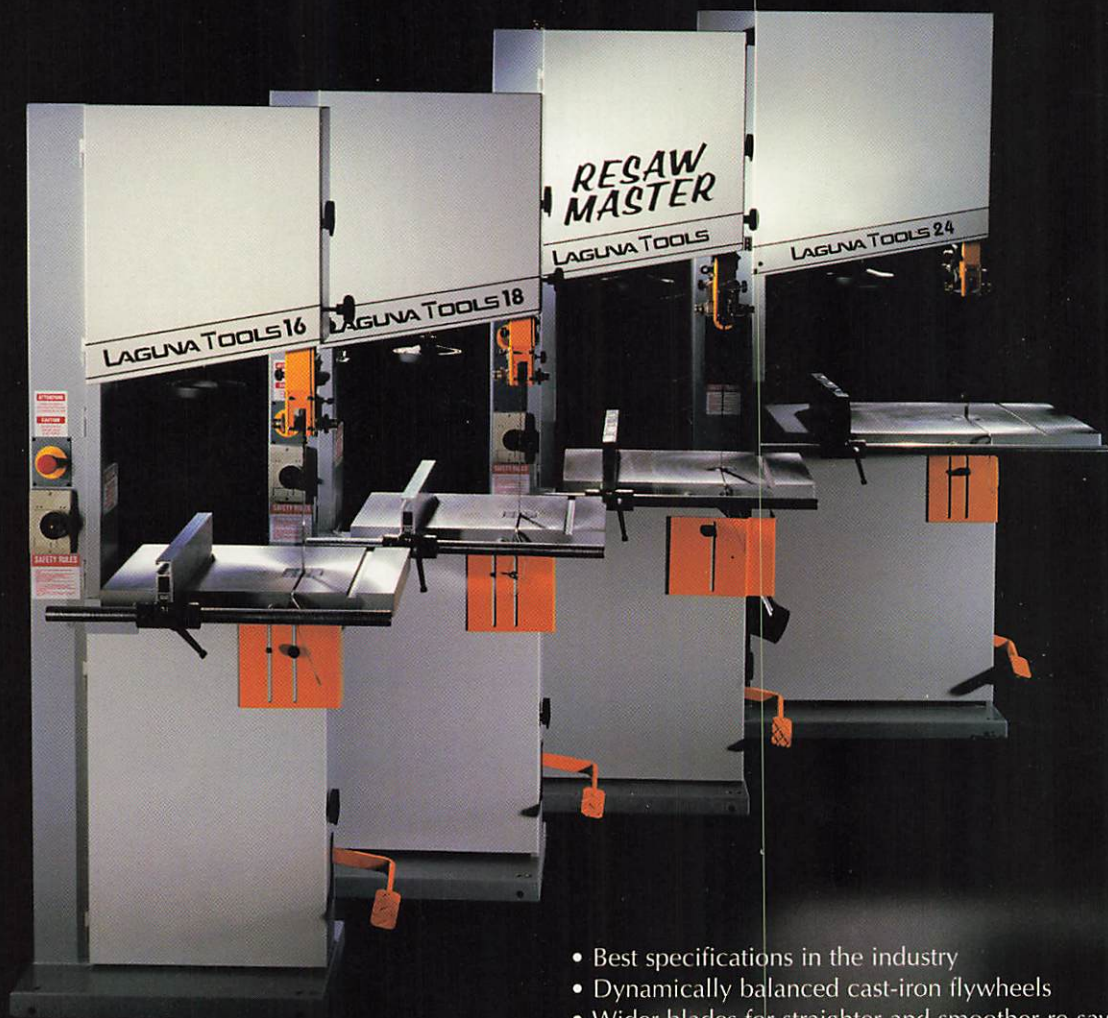
Proud sponsor of *The New Yankee Workshop* with Norm Abram and *The American Woodshop* with Scott Phillips on PBS.

DELTA
MACHINERY

A Pentair Company

**SERIOUS
WOODWORKING TOOLS
SINCE 1919.**

Taking Band Saws to New Levels



You have heard about them, you know that they are called the best, now it is time to own one. Our band saws have won an Editors Choice Award and our customers rave about them. But don't take our word, call today and order your free demonstration video and see for yourself why they are in such great demand.

Designed by Laguna Tools and imported from Italy, we have the finest and largest selection of European band saws in the country.

- Best specifications in the industry
- Dynamically balanced cast-iron flywheels
- Wider blades for straighter and smoother re-sawing
- Euro guides
- Conforms to the toughest dust standards
- Quiet and smooth with more power
- Robot welded steel frames
- More resaw height
- Rack and Pinion
- Easy blade change
- Mobility kit available
- Manufactured in Italy
- Order a custom made band saw to suit your needs.

LAGUNA TOOLS

You Build With Wood, We Build With Trust.

800-234-1976

17101 Murphy Avenue Irvine, CA 92614
(949) 474-1200 • FX (949) 474-0150

800-234-1976

100 Central Avenue South Kearny, NJ 07032
(973) 491-0102 • FX (973) 491-0591

E Mail: mail@lagunatools.com Web: www.lagunatools.com